Theses and Dissertations　　　　　　　　1. Thesis and Dissertation Collection, all items

1975

A superconducting synchronous torque-compensated motor for naval applications.

Reynerson, Donald Martin

Massachusetts Institute of Technology

http://hdl.handle.net/10945/21074

A SUPERCONDUCTING SYNCHRONOUS TORQUE-COMPENSATED MOTOR FOR NAVAL APPLICATIONS

Donald Martin Reynerson

A SUPERCONDUCTING

SYNCHRONOUS TORQUE-COMPENSATED

MOTOR FOR NAVAL APPLICATIONS

by

DONALD MARTIN REYNERSON

BSEE, MEE, NORTH CAROLINA STATE UNIVERSITY
(1968)

SUBMITTED IN PARTIAL FULFILLMENT OF THE
REQUIREMENTS FOR THE DEGREE OF

NAVAL ARCHITECT

AND THE DEGREE OF

MASTER OF SCIENCE IN MECHANICAL ENGINEERING

at the

MASSACHUSETTS INSTITUTE OF TECHNOLOGY
JUNE, 1975

A SUPERCONDUCTING SYNCHRONOUS TORQUE-COMPENSATED MOTOR
FOR NAVAL APPLICATIONS

by

DONALD MARTIN REYNERSON

Submitted to the Department of Ocean Engineering on May 9,
1975, in partial fulfillment of the requirements for the
degree of Naval Architect and the degree of Master of Science
in Mechanical Engineering.

ABSTRACT

Modern naval vessels, which depend more on a reduction in
the displacement per shaft horsepower than an increase in the
lift/drag ratio to improved performance, must increasingly
turn to propulsion systems with characteristically high power
densities. Systems planned for or currently employed in high
performance craft all have inherent disadvantages which
require new approaches. One such approach is the use of
electrical propulsion systems which allow operational flex-
ibility and an ease of power transfer not found in many other
systems. The utilization of superconducting materials in the
field windings of propulsion machines significantly improves
the power density of the system while retaining other advan-
tageous characteristics of electrical propulsion systems.

Many superconducting motors either in the conceptual or
prototype stages of development, require the superconducting
field winding to transfer machine torque to the naval craft
which, in turn, requires a substantial structural interface
between the superconducting element and the environment.
Such a structural interface results in a significant heat leak
into the cryogenic components reducing system efficiency.
Other designs place the cryogenic element on the rotor,
requiring a rotating liquid transfer coupling and all of the
technical complexities that such an element entails.

This thesis proposes the use of a dual field motor; the
main power producing field to be superconducting, and an ambient
temperature concentric compensating field configured to remove
the load torque from the cryogenic element. Both fields are
wound on the stator, thus eliminating the liquid transfer pro-
blem; the three-phase armature is wound on the rotor. A
mathematical model is developed and the size and parameters
for a 22,700 horsepower motor are determined. The resulting
model is analyzed and various modes of control discussed.

Thesis Supervisor: Philip Thullen
Title: Associate Professor of Mechanical Engineering

Thesis Reader: Clark Graham
Title: Associate Professor of Marine Systems

ACKNOWLEDGEMENTS

TABLE OF CONTENTS

I. INTRODUCTION

The use of superconducting field windings in synchronous machines is now an accepted and experimentally substantiated technique, and it is evident that these machines have the greatest potential applications where weight and power density are of significance in the system design philosophy. Because of the inherent weight and volume savings and system flexibility associated with superconducting power generation and utilization, superconducting machines present an attractive alternative in the design of naval propulsion systems.

As progress is made from lower to higher performance water-borne vehicles, increases in speed are entirely attributable to increases in the shaft horsepower per ton displacement rather than to improvements in the vehicle lift-drag ratios. In addition, hull structure and propulsion plant together have in past designs accounted for an average of 60% of the light ship weight, and future marine engineering studies, especially those in the naval systems domain, should concentrate on such developments as superconducting machines which promise significant weight and volume savings and superior acoustical performance. Electric power trains, because of their flexibility, are particularily attractive in advanced ship concepts such as SWATH, hydrofoils, and surface effect vehicles which require power transmission in strictly confined spaces and transmission trains which change direction abruptly.

All of the superconducting synchronous motors now either in the conceptual or prototype phases of development, utilize a rotating superconducting field winding which requires cryogenic fluid transfer to the rotating member. Many designs also require the superconducting field winding to transmit machine torque to the ship hull which requires a substantial structural interface between the cryogenic elements and the ship's hull. This results in significant thermal leakage to the low temperature machine components.

The motor evaluated herein will have a stationary superconducting field winding and an ambient temperature rotating armature winding, the armature being the central, interior member (see Figure 1). The field winding is surrounded by a solid, iron flux return path, operating in a magnetically saturated condition. A third direct current ambient temperature winding is provided to assume the load torque and relieve the superconducting field winding of this duty. This design eliminates the need for a rotating cryogenic transfer coupling and will substantially reduce the structural interface between the superconducting field and its environment.

The compensating field winding, if feasible, may be located either between the armature and main field or between the main field and shield. This thesis will examine both configurations and draw the appropriate conclusions from the analytical results.

COMPENSATOR
FIELD AXIS

θ_{WC}

θ_{WF}

θ_{WA}

C

A'

B

B'

A

C'

C'

A

B

B'

MAIN
FIELD
AXIS

γ

θ

ϕ

AXIS OF
PHASE A

R_{AI}

R_{AO}

R_{CI}

R_{CO}

R_{FI}

R_{FO}

R_{SI}

R_{SO}
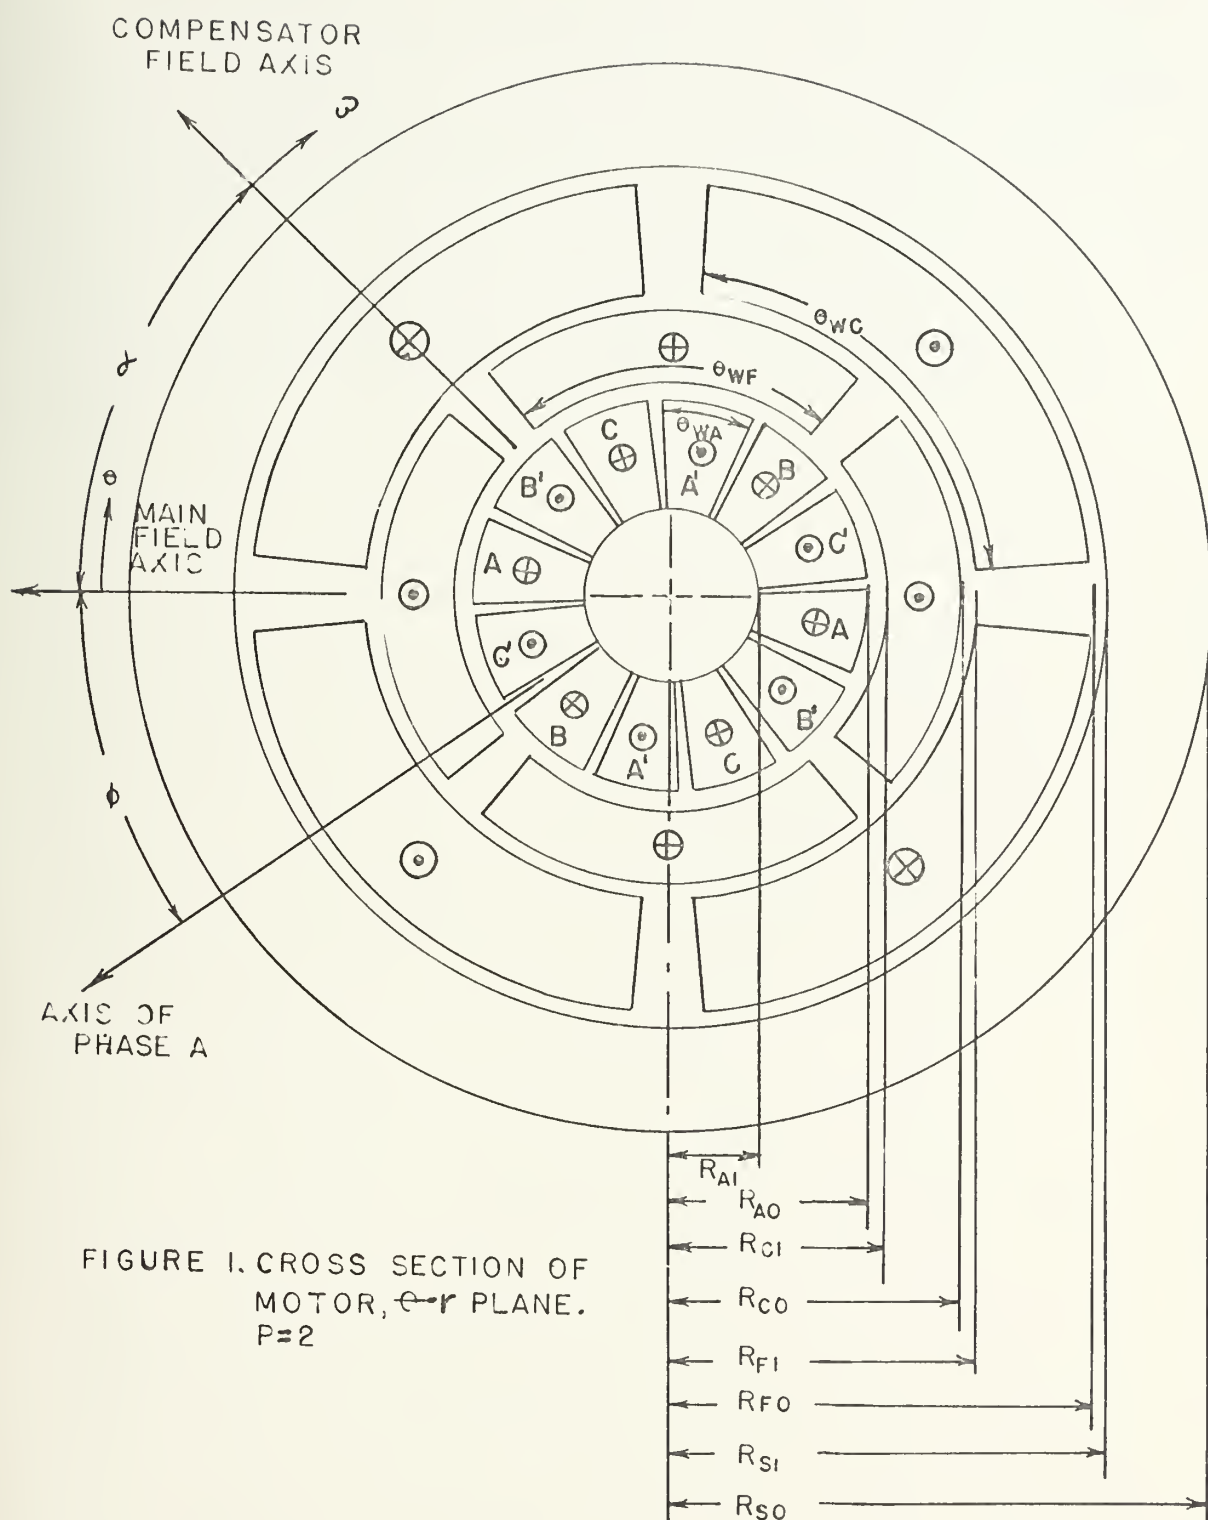
FIGURE I. CROSS SECTION OF
MOTOR, θ-r PLANE.
P=2

This paper developes the motor in a conceptual framework with emphasis on naval applications and high performance vehicles. Figures 2, 3, and 4 depict three possible applications to naval ship systems that are currently considered "state-of-the-art" to the naval architect and marine engineer. The motor developed herein may find useful applications both in these systems and many of those to be conceived in the future.

POWER TRANSMISSION CABLES

SUPERCONDUCTING MOTOR

CRYOGENIC AUXILIARIES
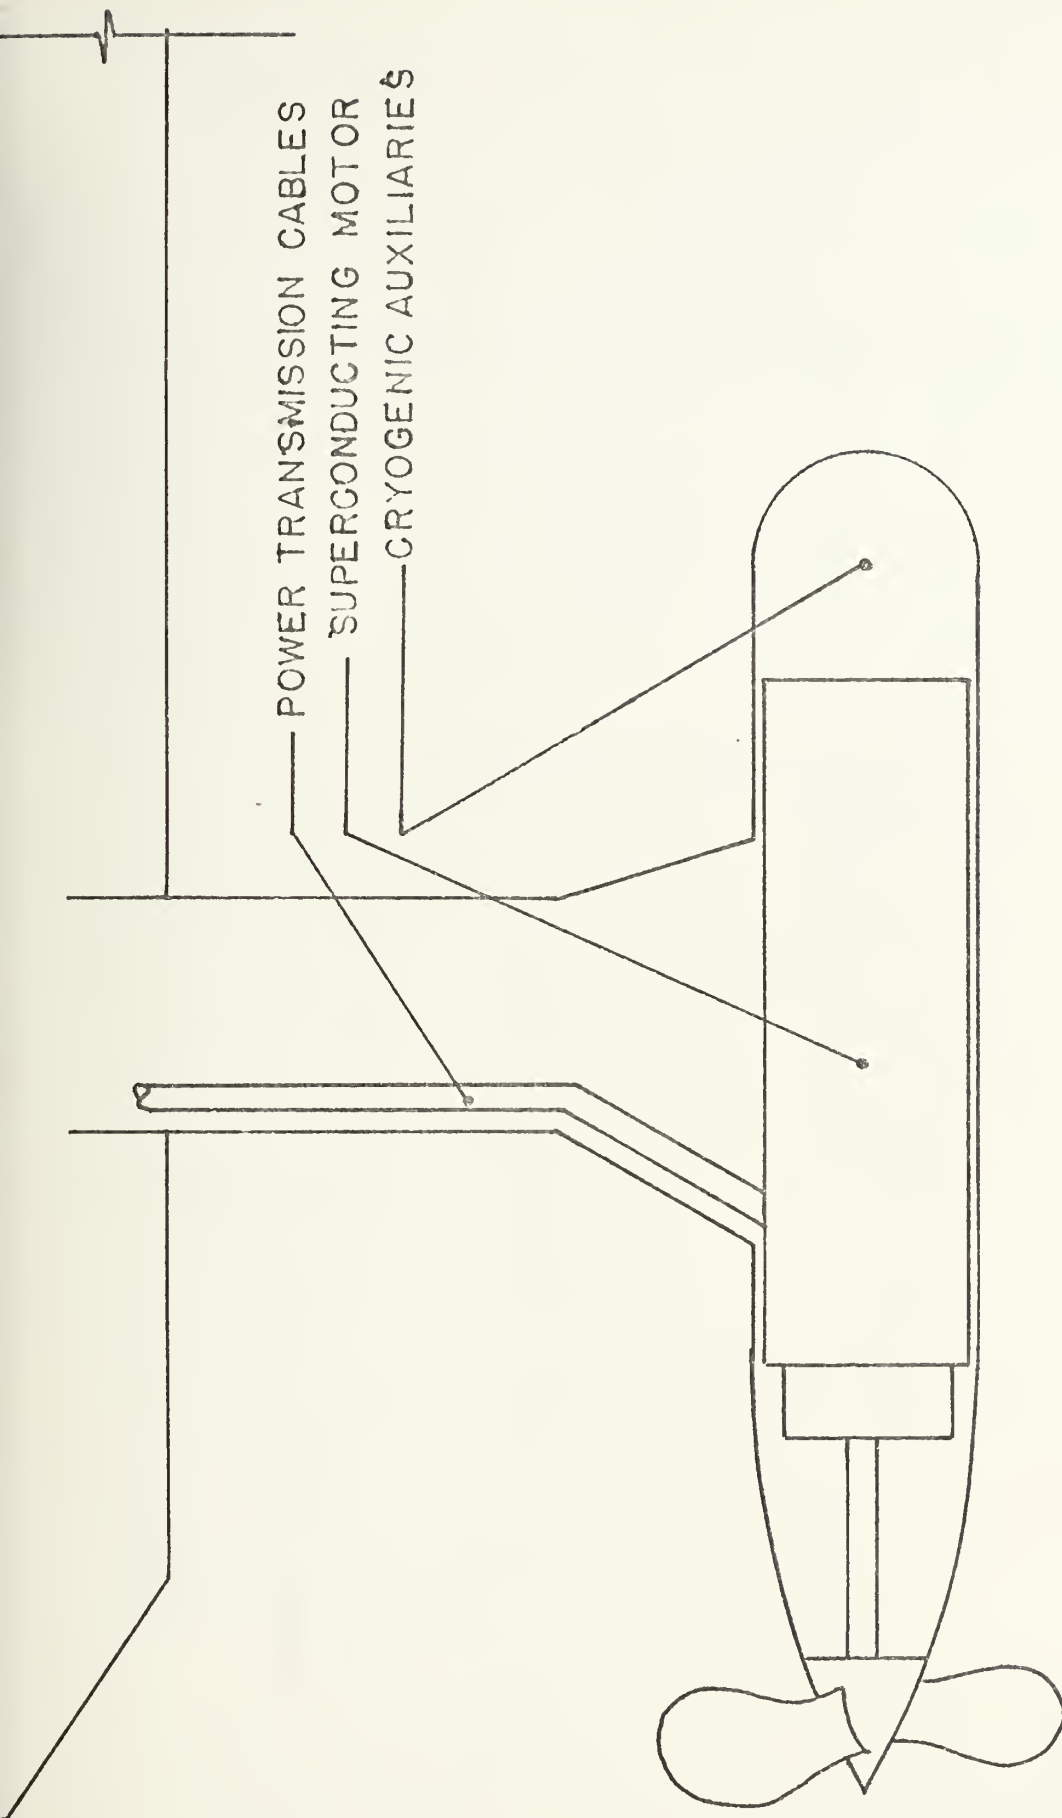
FIGURE 2. HYDROFOIL APPLICATION

9

POWER TRANSMISSION CABLES

CRYOGENIC AUXILIARIES

SUPERCONDUCTING MOTOR
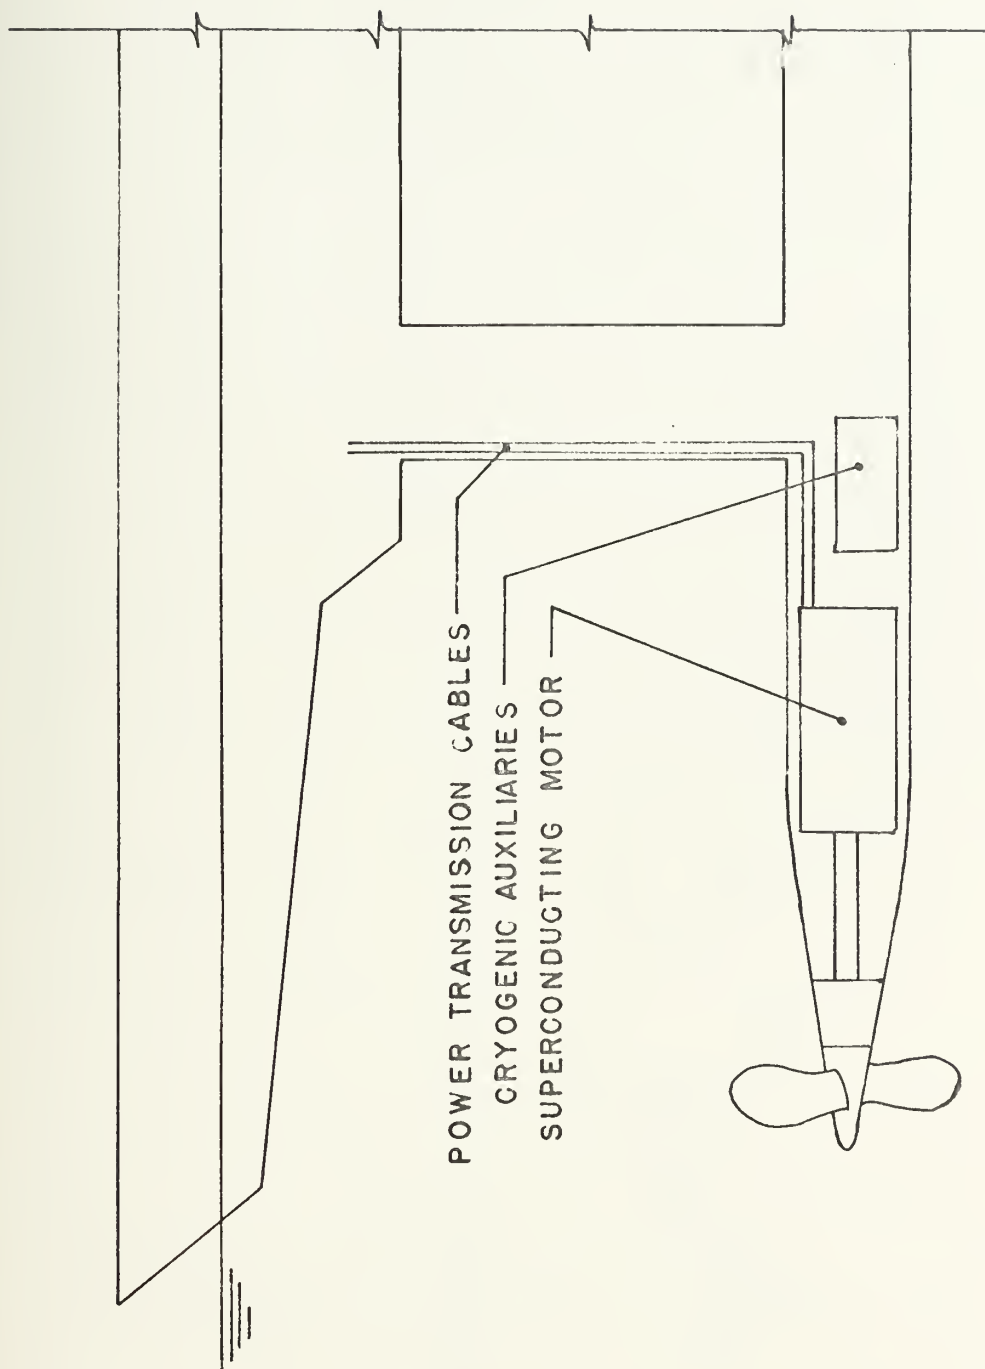
FIGURE 3. SMALL WATERPLANE AREA-TWIN HULL(SWATH) APPLICATION.

CRYOGENIC AUXILIARIES

SUPERCONDUCTING MOTOR
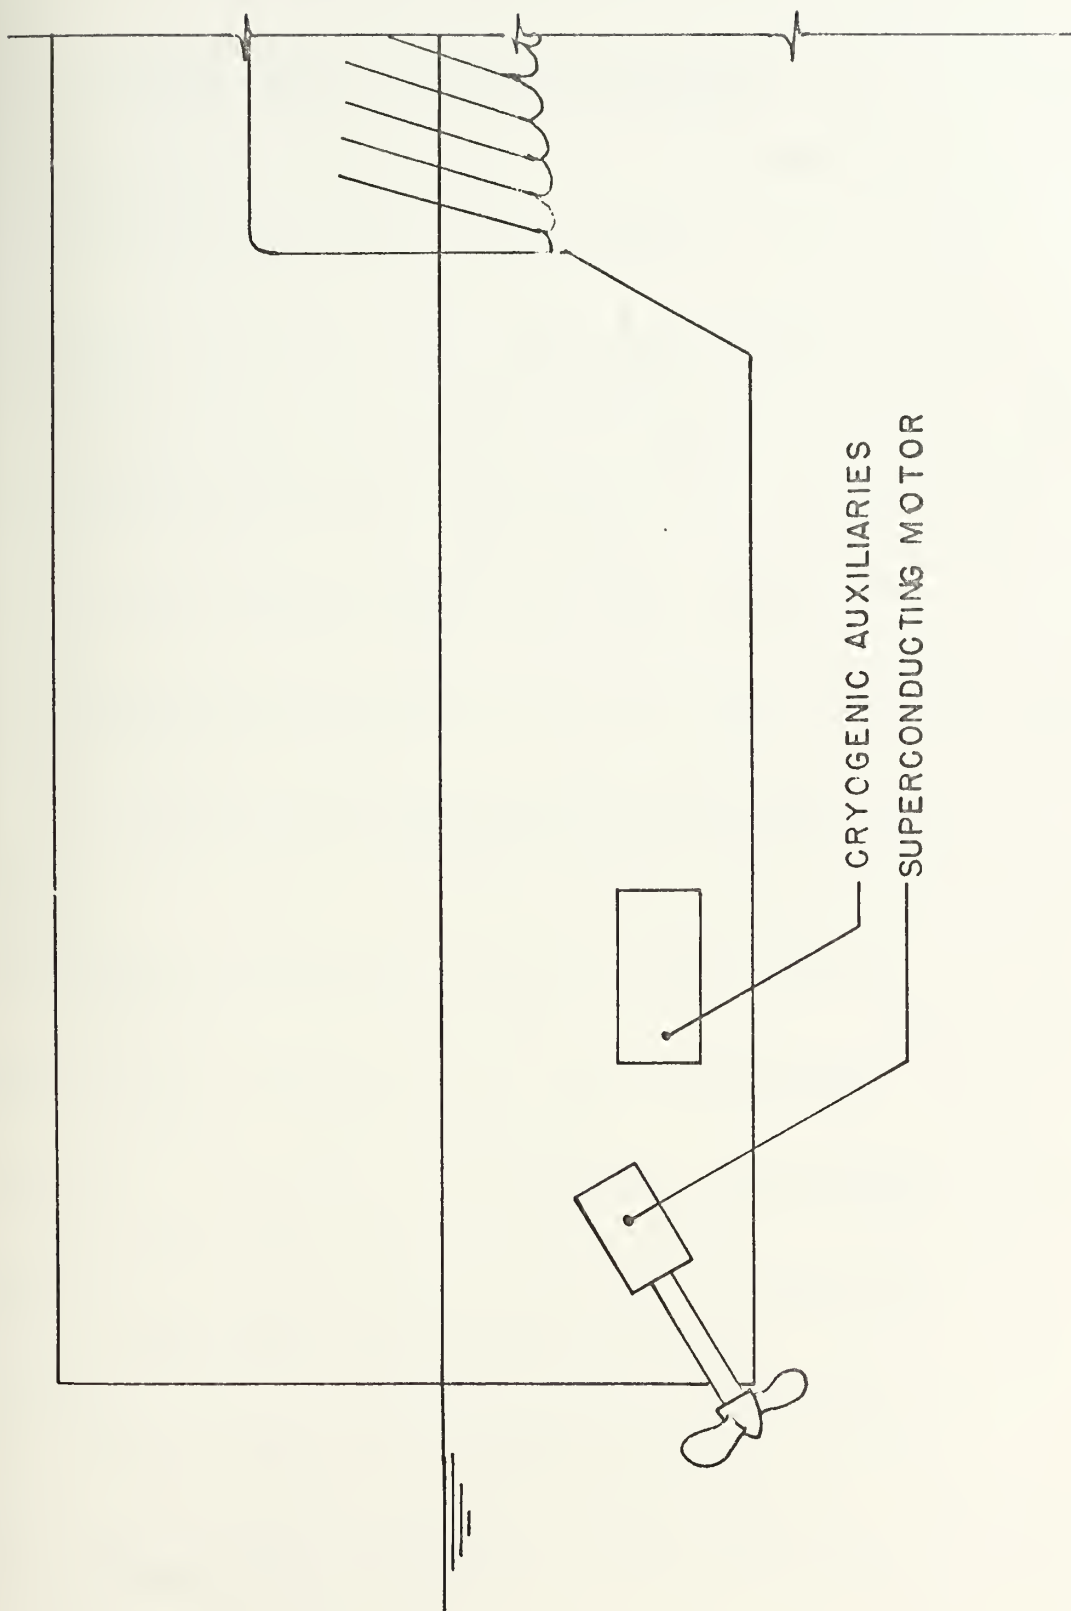
FIGURE 4. SURFACE EFFECT SHIP(SES) APPLICATION.

13

LIST OF TABLES

LIST OF SYMBOLS

A_o, A_1, A_2, A_3, A_4, A_5,

B_o, C_o, D_o, a_o, b_o, c_o,

d_o, A_k, B_k, C_k, D_k,

coefficients arising
from analyses

$\underline{A}$, $\underline{B}$

$\overline{B}_A$
armature field-vector

$\overline{B}_C$
compensator field-vector

$\overline{B}_F$
superconducting-main-field field-vector

$\overline{B}_N$
$\overline{B}_a + \overline{B}_c + \overline{B}_f$

$\overline{B}_{FN}$
$\overline{B}_c + \overline{B}_f$

dsh
shield dissipation per
unit man of shield
material

$\overline{E}$
electric field strength

E_c
excitation voltage
generated by the
compensating field

E_f
excitation voltage
generated by the super-
conducting field

E
phasor sum of E_c and E_f

15

e_f — per unit excitation voltage generated by superconducting field

$\bar{f}$ — force on moving charge, q

$\bar{F}$ — force density, newtons/m^3

$\bar{H}$ — magnetic field density (vector)

H_{rf} — radial component of the magnetic field density due to a current in the field winding in region $R_{fi} < r < R_{fo}$

$H_{\theta f}$ — azimuthal component of magnetic field density due to a current in field winding in region $R_{fi} < r < R_{fo}$

H_{rfi} — radial component of magnetic field density due to a current in the field winding and in region $R_{ai} < r < R_{fi}$

$H_{\theta fi}$ — azimuthal component of magnetic field density due to a current in the field winding in region $R_{ai} < r < R_{fi}$

H_{rfo} — radial component of magnetic field density due to a current in the field winding in region $R_{fo} < r < R_{si}$

$H_{\theta fo}$	azmithual component of magnetic field density due to a current in field winding in region $R_{fo} < r < R_{si}$
H_{rc}	radial component of magnetic field density due to a current in compensator in region $R_{ci} < r < R_{co}$
H_{ra}	radial component of magnetic field density due to a current in phase a of armature in region $R_{ai} < r < R_{ao}$
i_a	per-unit phase current
I_z	polar moment of inertia
I_A	RMS phase current and line current
I_B	rated base current
J_a	armature current density
J_c	compensator current density
J_f	field current density
$\bar{J}_F$	free current denisty
k	index, separation constant

L_a armature phase a self-inductance

L_c compensator self-inductance

L_f field self-inductance

L_{ab} phase-to-phase mutual inductance

ℓ machine physical length

ℓ_a effective length for calculating armature winding self-inductance

ℓ_c effective length for calculating compensator self-inductance

ℓ_f effective length for calculating field self-inductance

ℓ_m effective length for calculating field-to-armature mutual inductance

ℓ_{sh} effective length in calculating shield losses

M_{af} mutual inductance, field-to-phase-a of armature

M_{ac} mutual inductance, compensator-to-phase-a of armature

M_{fc} mutual inductance, field to compensator

M_t moment

N_{ta}	number of phase-a turns per pole pair
N_{tc}	number of compensator turns per pole pair
N_{tf}	number of field turns per pole pair
n	index, harmonic
P	machine power in volt-amps
p	number pole pairs
$\underline{p}$	$\dfrac{2\pi}{p}$
PWR	real power in kw or hp
P_c	armature and compensator loss in hp
P_{ec}	eddy-current losses in armature
P_{sh}	shield losses in hp or kw
q	charge in coulombs
r	radial coordinate
R_{ai}	armature inner radius
R_{ao}	armature outer radius
R_{fi}	field inner radius

R_{fo} field outer radius

R_{ci} compensator inner radius

R_{co} compensator outer radius

R_{si} shield inner radius

R_{so} shield outer radius

R separation of variables parameter

$\bar{T}$ torque

$\bar{T}_a$ armature torque

$\bar{T}_f$ field torque

$\bar{V}$ charge linear velocity

V volume

V_B rated base phase voltage

V_T machine phase terminal voltage

v_T per-unit terminal phase voltage

w R_{si}/R_{so}; shield radius ratio

x R_{ai}/R_{ao}; armature radius ratio

x_a internally nomalized reactance

x_d per-unit synchronous reactance

X_Λ	synchronous reactance in henrys
y	R_{fi}/R_{fo}; field radius ratio
z	R_{si}/R_{so}; compensator radius ratio
$\bar{1}_r$	unit normal vector in radial direction
$\bar{1}_\theta$	unit normal vector in azimuthal direction
$\bar{1}_z$	unit normal vector in z direction
$K_1,\ K_2,\ K_3,\ K_4,\ K_5$	constants of convenience arising from analysis
α	angle between compensator and field direct axes
α_o	reflection coefficient
Θ	separation of variables parameter
θ	azimuthal coordinate
θ_{wa}	armature winding included angle
θ_{wc}	compensator winding included angle
θ_{wf}	field winding included angle
μ_o	permeability of free space
μ_s	permeability of shield material

σ_m	magnetic shear stress
$\tau_{\theta z}$	shear stress
σ	conductivity of armature and compensator conductors
ϕ	magnetic potential
λ	space winding factor, trigonometric coefficient defined in equation 51
ψ	magnetic flux function
ω_e	electrical angular frequency
ω_m	mechanical angular frequency
$\Gamma,\ \sigma_1,\ \sigma_2,\ \Omega_f,\ \Omega_c,$ $\Lambda_1,\ \Lambda_2,\ \overline{\Lambda},\ \Delta_i\,(i=1,2,3),$ $\eta,\ \zeta_1,\ \zeta_2$	constants of convenience arising from analysis

II. PHYSICAL DESCRIPTION OF MOTOR

Figures 1 and 5 depict the approximate physical con-
figuration of the compensated motor. The illustrations used
throughout this paper address only the two pole-pair (four
pole) machine, but the analysis herein applies to configura-
tions with any desired number of pole pairs.

The three-phase armature is wound on the rotor and
supplied power through a high voltage slip ring assembly.
The armature is to operate at ambient temperatures and is
cooled by conventional non-cryogenic techniques. It is
assumed that the upper constraint on armature current density
is approximately 2.5×10^6 amps per square meter.

The superconducting field winding is positioned either
outside of the compensator winding or between the armature and
compensator windings. It is to operate at a temperature less
than 5°C. As discussed earlier, the field winding may be
fixed to the machine housing through an insulating medium
which also functions as the supporting structure for the
field. The field structure is assumed to contain little, if
any, ferromagnetic material.

An idealized depiction of the field winding support
structure is shown in Figure 6. This configuration is
particularly applicable to a machine with the compensator
within the field winding. Otherwise, the field could be
supported radially and axially through the end housings of
the machine. The optimum support structure could be depicted
as some configuration of bicycle spoke supports made from an
effective thermal insulator.

23

MAGNETIC SHIELD AND MOTOR HOUSING

AMBIENT COMPENSATOR WINDING

SUPERCONDUCTING FIELD WINDNNG

3 Ø ARMATURE

PROPELLER SHAFT

CRYOGENIC AND POWER TERMINALS

BEARING ASSEMBLY

SLIP RING ASSEMBLY
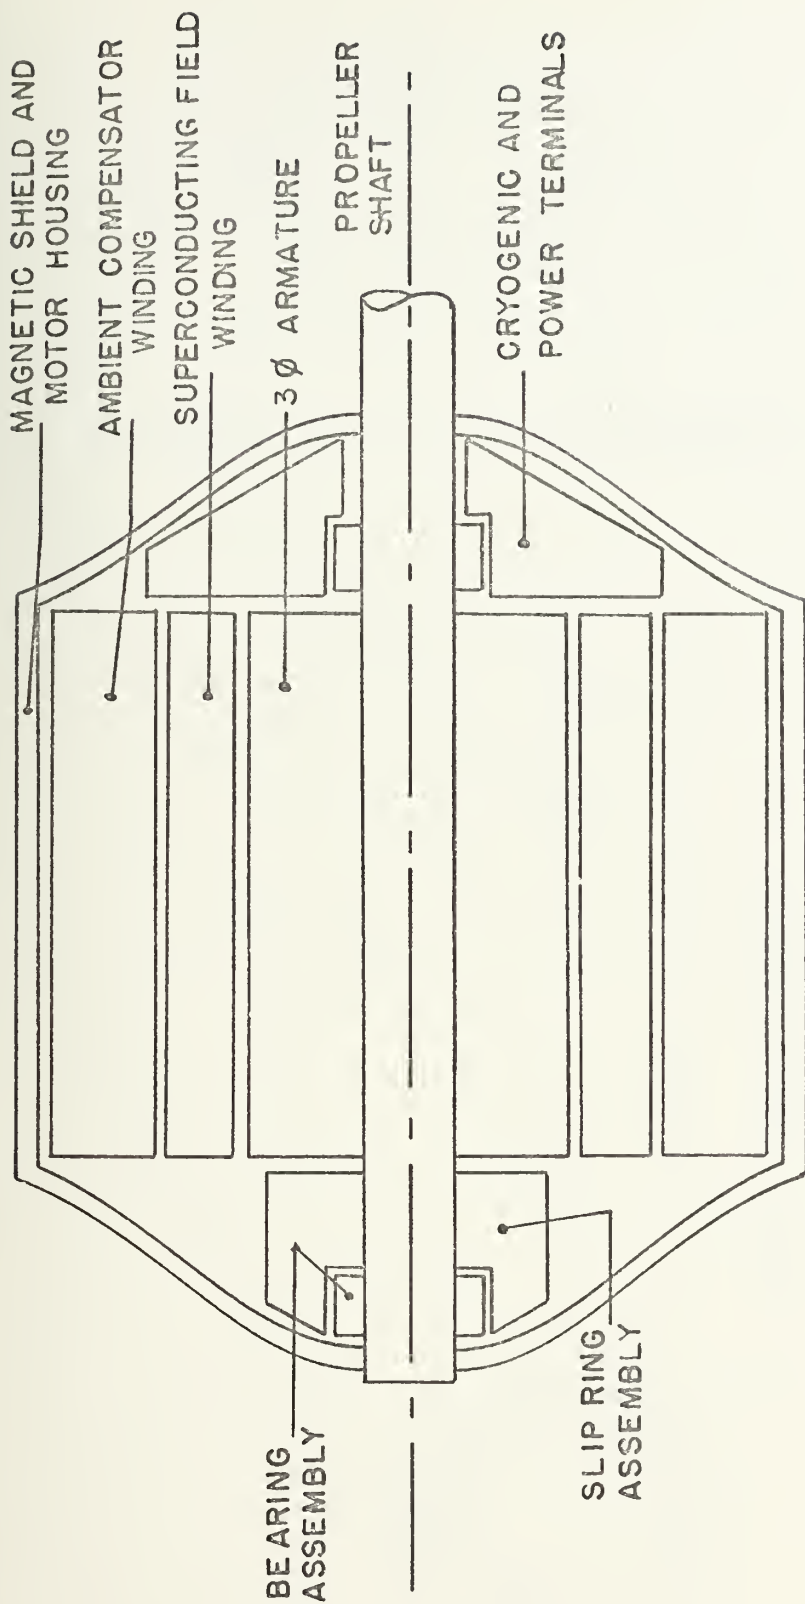
FIGURE 5. CROSS SECTION OF TORQUE-COMPENSATED SUPERCONDUCTING MOTOR, γ-z PLANE.

24
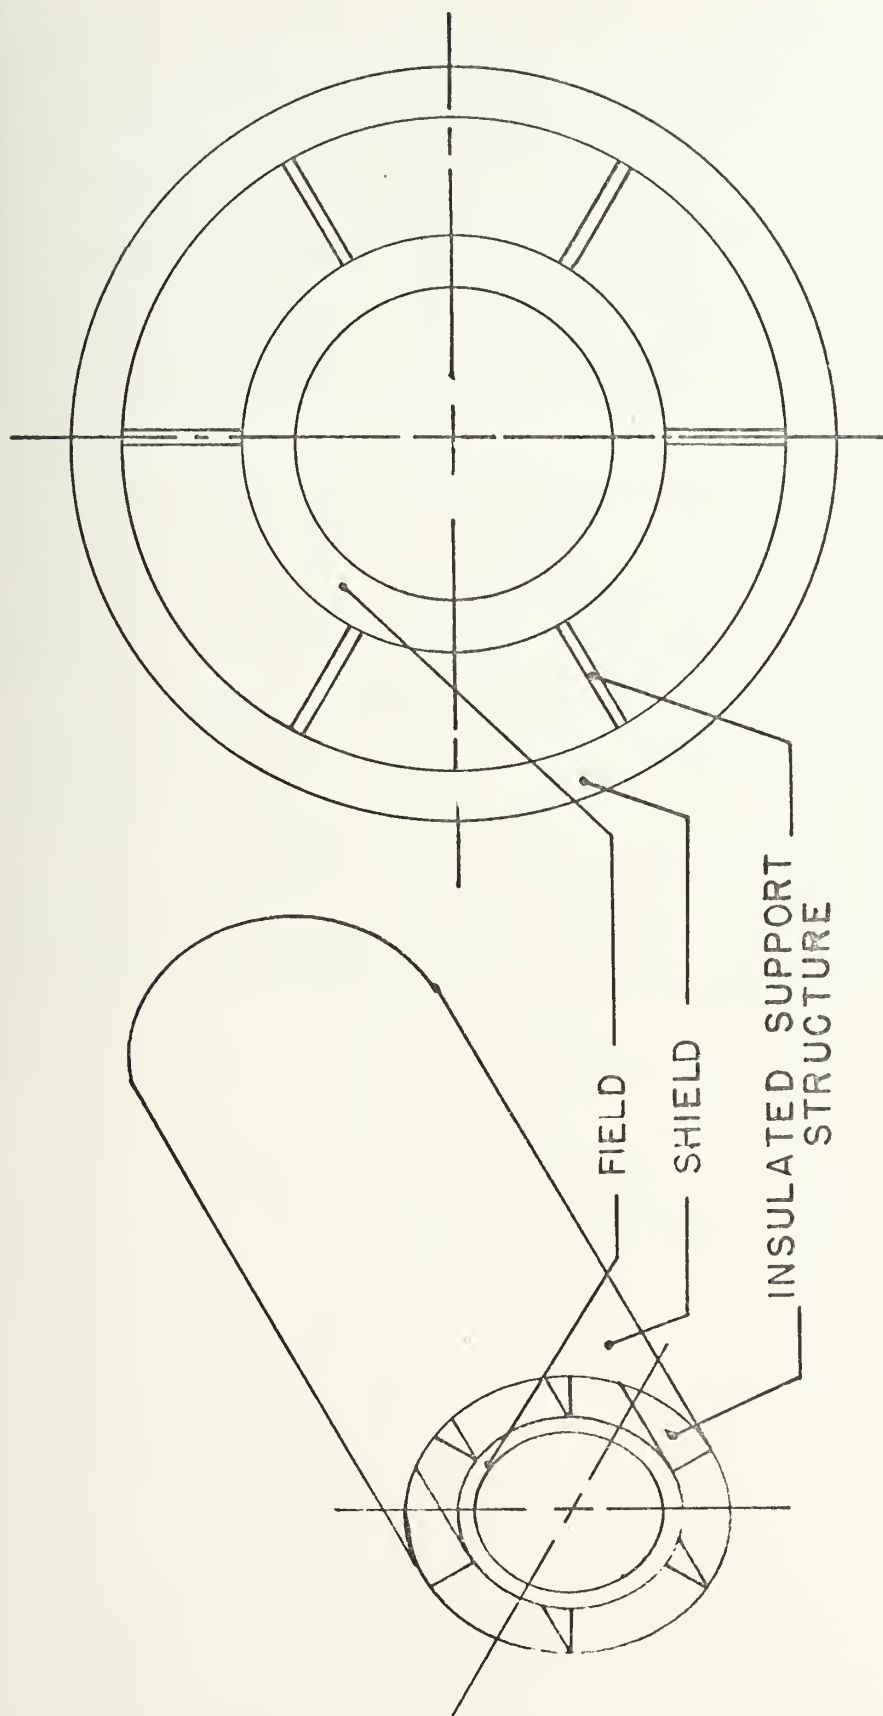
FIGURE 6. IDEALIZED SUPPORT STRUCTURE FOR SUPERCONDUCTING MAIN FIELD ELEMENT.

FIELD

SHIELD

INSULATED SUPPORT STRUCTURE

The compensating winding is physically located either outside of the field winding or between the field and the armature windings. It is to operate at ambient temperatures, to be cooled by non-cryogenic techniques, and to contain little, if any, ferromagnetic material. The current density is constrained at a maximum value of $2.5 \times 10^{+6}$ amps per square meter.

The motor examined herein is envisioned to be designed as a modular element in a propulsion system which must operate with a minimum down time after failure.

The motor will be fitted with easily disconnected fittings in order to facilitate rapid replacement upon failure at shore based facility. The cryogenic auxiliaries as shown in Figures 2, 3, and 4 are also to be modular packages which may be rapidly replaced by new or refurbished units.

III. THEORETICAL CHARACTERISTICS AND RATING EXPRESSIONS

An examination of Figure 7 reveals the requirement for zero torque on the superconducting field winding in terms of the machine's magnetic fields. The fields are referenced to the stator, and the resulting field vector at any location may be found as:

$$\bar{B}_N = \bar{B}_A + \bar{B}_{FN} \tag{1}$$

where the resultant of the compensator and superconducting field winding fields is expressed as an effective field flux density:

$$\bar{B}_{FN} = \bar{B}_F + \bar{B}_C \tag{2}$$

$\bar{B}_A$, $\bar{B}_C$, and $\bar{B}_F$ are the field vectors of the armature, compensator and field respectively.

A requirement for zero torque on the superconducting field winding is that the vectors $\bar{B}_N$ and $\bar{B}_F$ be colinear as reflected in Figures 7 and 8.

The following constraints placed on machine design parameters are specified as:

1. Maximum field current limited to $1.25 \times 10^8 a/m^2$

2. Maximum armature current limited to $2.5 \times 10^6 a/m^2$

3. Maximum compensator current limited to $2.5 \times 10^6 a/m^2$
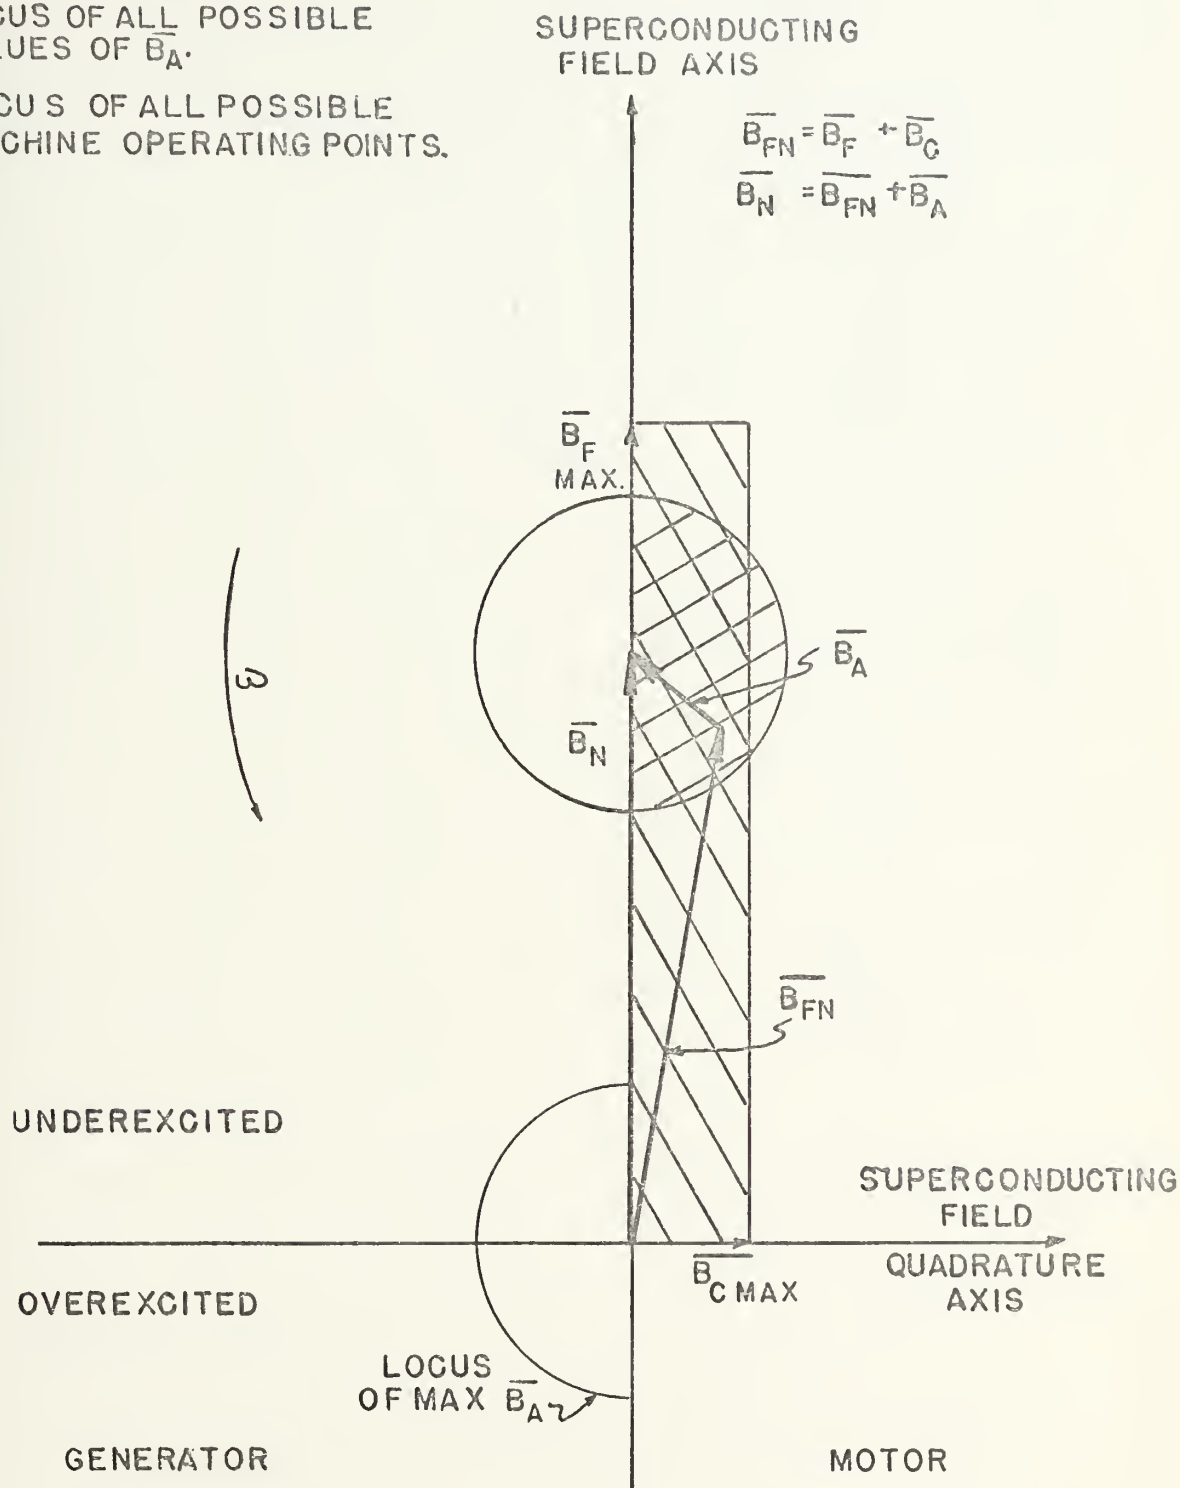
FIGURE 7. FIELD DENSITY CAPABILITY PLOT, $\alpha = 90°$;
UNDEREXCITED MODE.

28
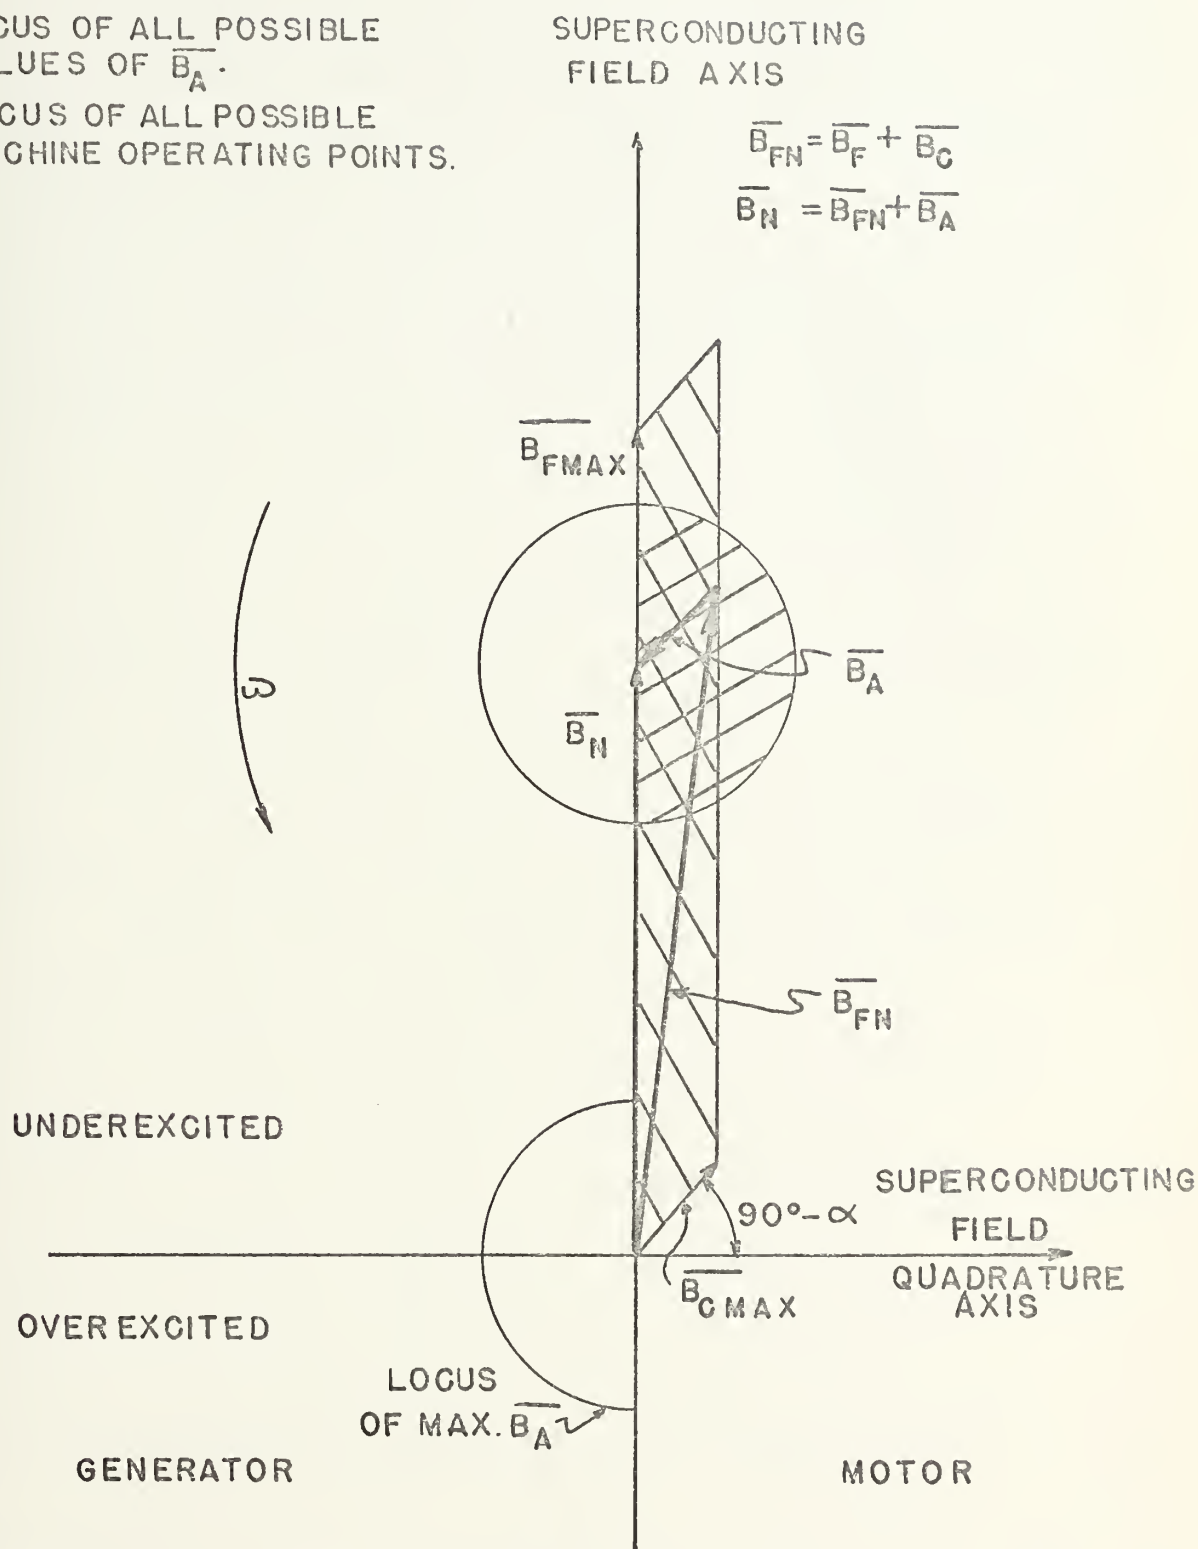
FIGURE 8. FIELD DENSITY CAPABILITY PLOT, $\alpha < 90°$; OVEREXCITED MODE.

4. Machine magnetic shear stress is to be

consistent with current design practices

Reference 6 presents a detailed discussion of constraints
1 through 3 above; and reference 7, Figure 11, shows magnetic
shear stresses found in recent designs.

Referring to Figures 1, 7, and 8, the angle α represents
the angle between the axis of the superconducting field and
the compensator field. Figures 7 and 8 show all possible
operating loci for the machine field vectors constrained as
above and operating as a motor. If angle α is decreased
from 90° electrically to some other fixed position, the
domain of operation decreases also. A comparison of Figures
7 and 8 shows this clearly. If α is permitted to vary
rather than fixing the relative position of the two fields,
an additional degree of freedom is introduced into the
analysis. Figures 9 and E1 represent the resulting voltage-
current relationships for the compensated machine. As a
result of the colinearity requirement imposed on the fields
$\overline{B}_N$ and $\overline{B}_F$, E_F and V_T must also be colinear as shown in
Figures 9 and E1. This results in a somewhat simplified
analysis as presented in Appendix E. The analysis in
Appendix E treats α as a constant ≤ 90° electrically.

Referring to Figures 9 or E1, the internal excitation
voltage arising from the field vector $\overline{B}_F$ is expressed as:

$$E_F = V_T + X_A I_A (\sin \psi - \cos \psi \cot \alpha) \qquad (E1)$$
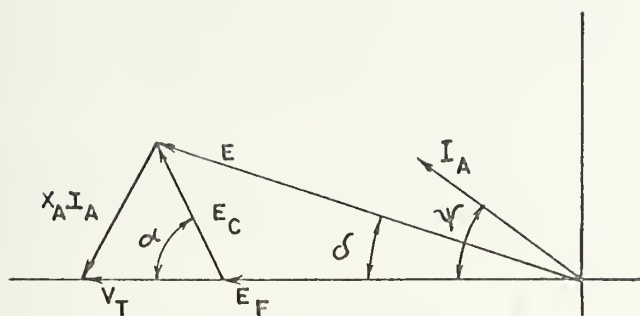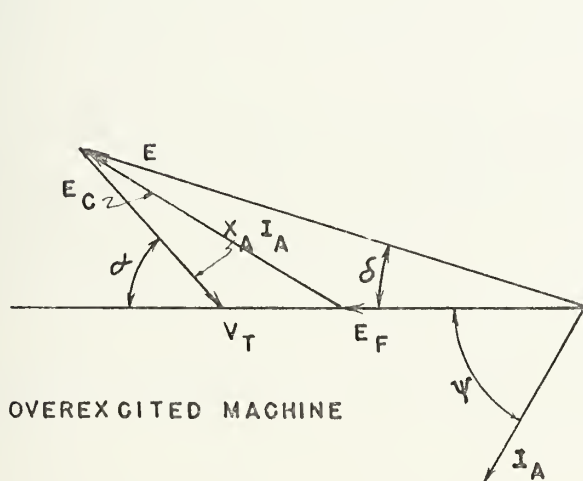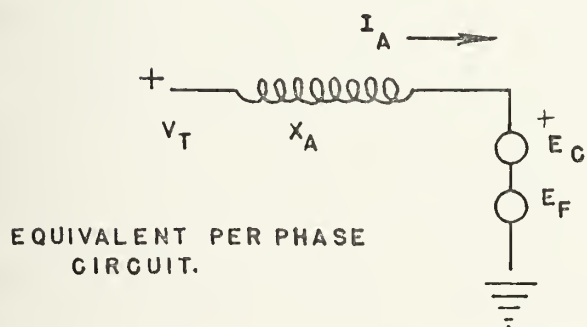
FIGURE 9.   VOLTAGE-CURRENT RELATIONSHIPS FOR OVEREXCITED
            AND UNDEREXCITED COMPENSATED MOTORS.

31

Utilizing this relationship and the appropriate expressions

for machine inductances, machine power in volt-amps is

found to be (see Appendix E):

$$P = \frac{24}{\sqrt{2}\pi} \omega_e \mu_o J_a J_f \ell_m (1-y^{2+p}) R_{fo}{}^4 C_{lpf} \sin\left(\frac{p\theta_{wa}}{2}\right) \sin\left(\frac{p\theta_{wf}}{2}\right) \left(\frac{V_T}{E_F}\right)$$

(E8)

when

$$\frac{V_T}{E_F} = 1 - x_a (\sin \psi - \cos \psi \cot \alpha)$$ (E14)

and, x_a, the internally normalized synchronous reactance is

given by equation E16. Equation C38, the armature torque

expression, may be written as

$$T_a = \Delta_1 [\Delta_2 \sin k\, \phi + \Delta_3 J_c \sin k(\phi-\alpha)]$$ (E20)

where Δ_1, Δ_2, and Δ_3 are defined in equations E17 through

E19; and are functions of J_a, J_f, and machine geometry.

The armature torque, T_a, may also be expressed by

equation E21 and the resolution of equations E20 and E21

results in a quadratic expression for the angle between the

axis of phase a and the superconducting field (angle ϕ):

$$Q_A \sin^2(k\phi) + Q_B \sin(k\phi) + Q_C = 0$$ (E22)

where Q_A, Q_B, and Q_C are defined in equations E23 through E25;

and are functions of J_a, J_f, J_c, and machine geometry.

32

Utilizing the constraint expression for zero torque on the superconducting field winding given by equations C38, C33 or E26:

$$\cos(k\phi) = J_c \bar{\Lambda} \cos(k\alpha) \qquad \text{(E26)}$$

A fourth order equation for the compensator current density is found in Appendix E to be

$$A_5 J_c{}^4 + A_4 J_c{}^3 + A_3 J_c{}^2 + A_2 J_c + A_1 = 0 \qquad \text{(E27)}$$

where A_1 through A_5 are defined in equations E29 through E33. The coefficients are also given in equation E34 for the specialized machine with four poles (p=2).

Using the above expressions in light of the aforementioned constraints, a FORTRAN program, THESIS I, was developed as a design tool to facilitate the selection of a feasible machine. "Feasible" is defined here to indicate a machine that meets the size, shear stress, and current density constraints discussed earlier. Other machine operating characteristics such as per-unit synchronous reactance, terminal or phase voltage, line current, and power factor are also considered. Appendix F presents more detailed information for use of the program. The program allows an incremental adjustment of the angle α and determines the required compensator current density to maintain zero torque or the superconducting field.

33

As indicated in Appendix E it is also possible to approach the problem by incrementing J_c and determining the angle α required for zero torque (see equation E47).

Because the solution of equation E27 yields four roots, some complex, some real, the valid real root may be found by substituting back into equation E22 and then E26.

Figures 7 and 8 indicate that angle α set at 90° electrically allows the greatest possible range of machine operation. Of course, by setting α to any value requires an adjustment in the compensator current density in order to maintain a net zero torque on the superconducting field. This particular mode of operation permits the designer to use fixed, rigid interfaces between the compensator and super-conducting field winding and the supporting environment.

An attractive alternative to this technique is to permit the angle α to seek its own natural value as power level changes and J_c is held constant. This requires a flexible interface for cryogenics and electrical power cables but eliminates the need for an external control loop. A third possible, but less attractive method, is to fix the compensator current J_c, and mechanically position the field or compensator through a feedback control loop.

Equation E40

$$p = K_3 J_a - K_4 J_a^2 (\sin \psi - \cos \psi \cot \alpha) \tag{E40}$$

K_3 and K_4 defined by equations E36, E38, and E41, indicates

34

the utility that angle α may offer in adjusting the machine power level. It is noted that if α is used to adjust power level, J_c must be varied to maintain the zero torque condition.

It is also possible to express the field current density, J_f, as:

$$J_f = K_5 + K_4 J_a (\sin \psi - \cos \psi \cot \alpha) \qquad (E42)$$

where K_5 is defined by equation E43. If λ is defined as

$$\lambda \equiv \sin \psi - \cos \psi \cot \alpha, \qquad (3)$$

E42 may be written as:

$$J_a = (\frac{1}{K_4 \lambda}) J_f - (\frac{K_5}{K_4 \lambda}) \qquad (E44)$$

Figure 10 depicts λ as a function of the power factor angle ψ for various values of α. If the machine is over-excited (quadrants I and IV of Figure 10), λ may have either positive or negative values, depending upon the value of angle α. If the machine is underexcited (quadrants II and III of Figure 10), λ may only assume negative values. Figure 11 depicts plots of equation E44 for a fixed power factor angle with the machine underexcited. An examination of Figures 10 and 11 shows that the slope of equation E44 may have either positive or negative values depending on the angle α for the overexcited machine. Conversely, Figures 10 and 12 indicate
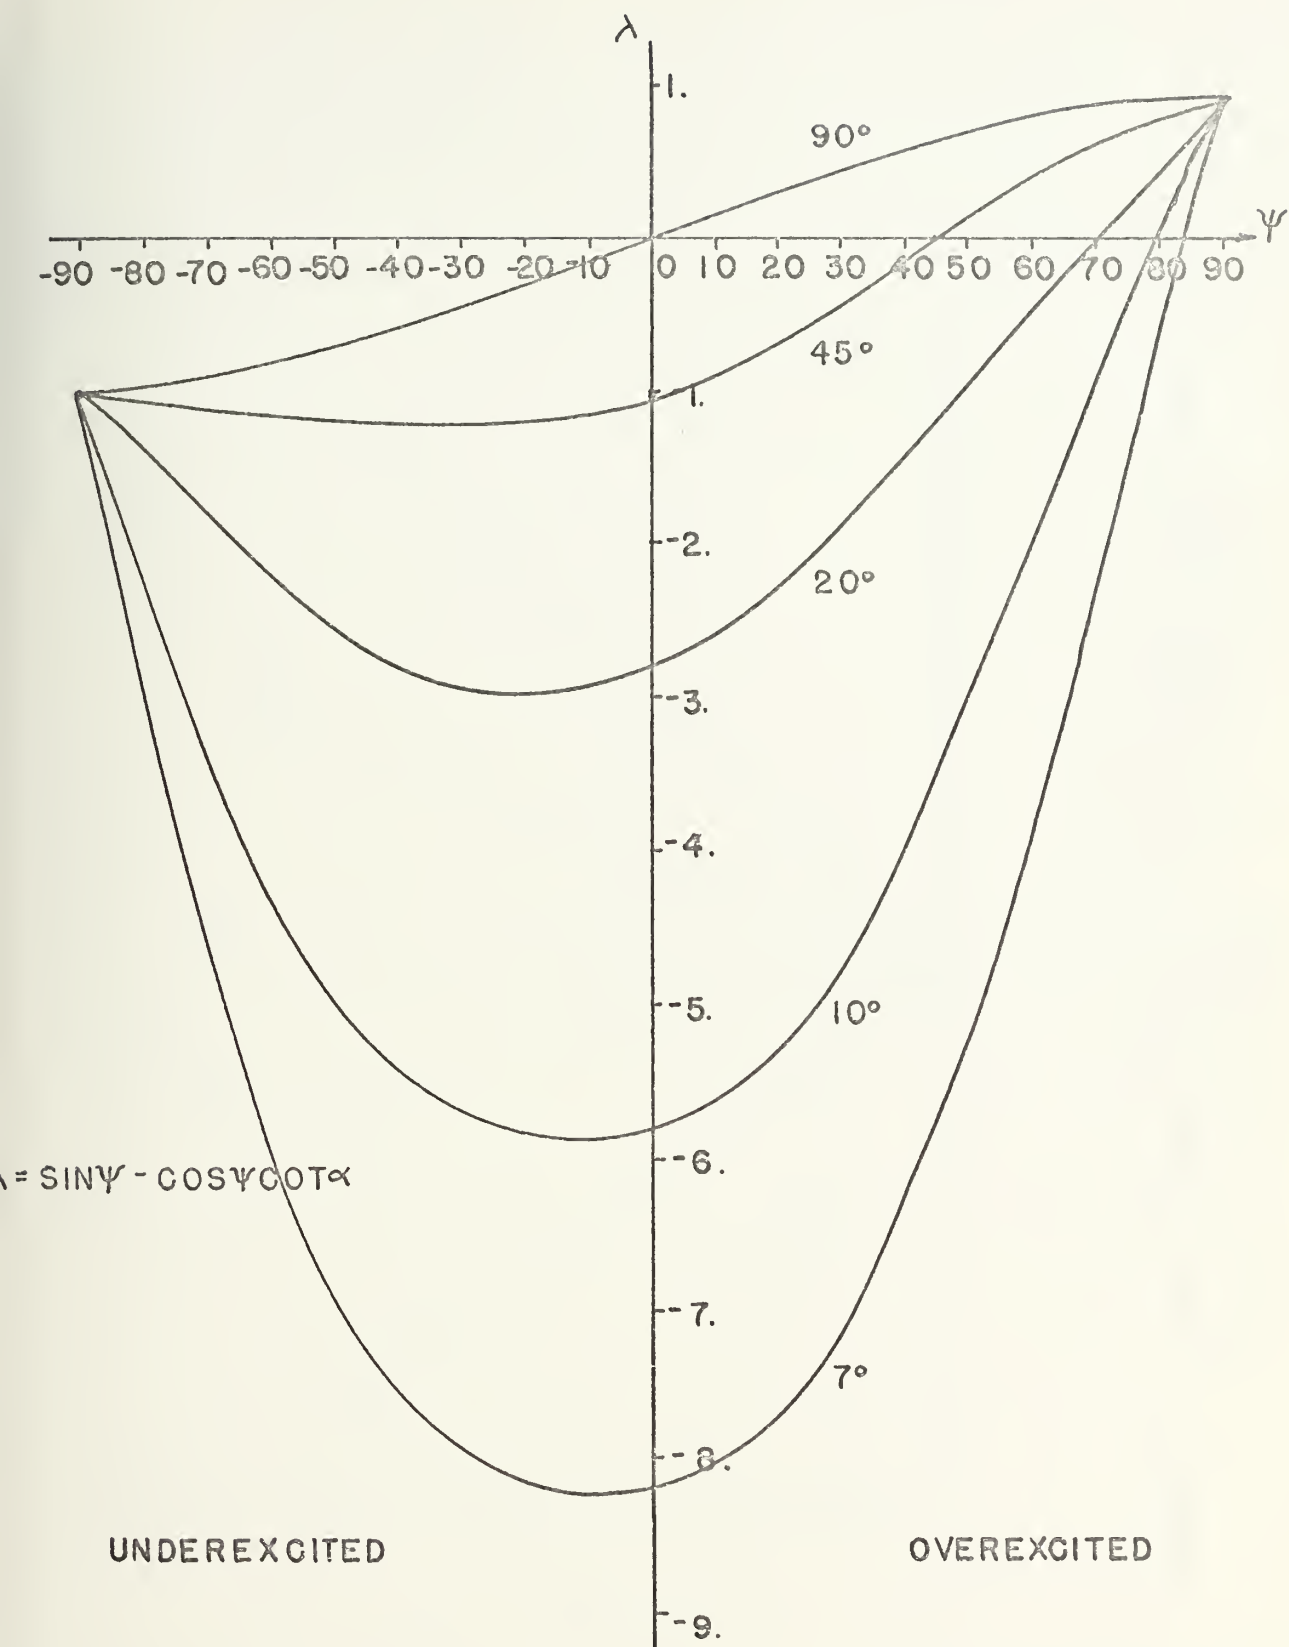
FIGURE 10. λ AS A FUNCTION OF POWER FACTOR ANGLE, Ψ.

36

$\gamma = \gamma_1$
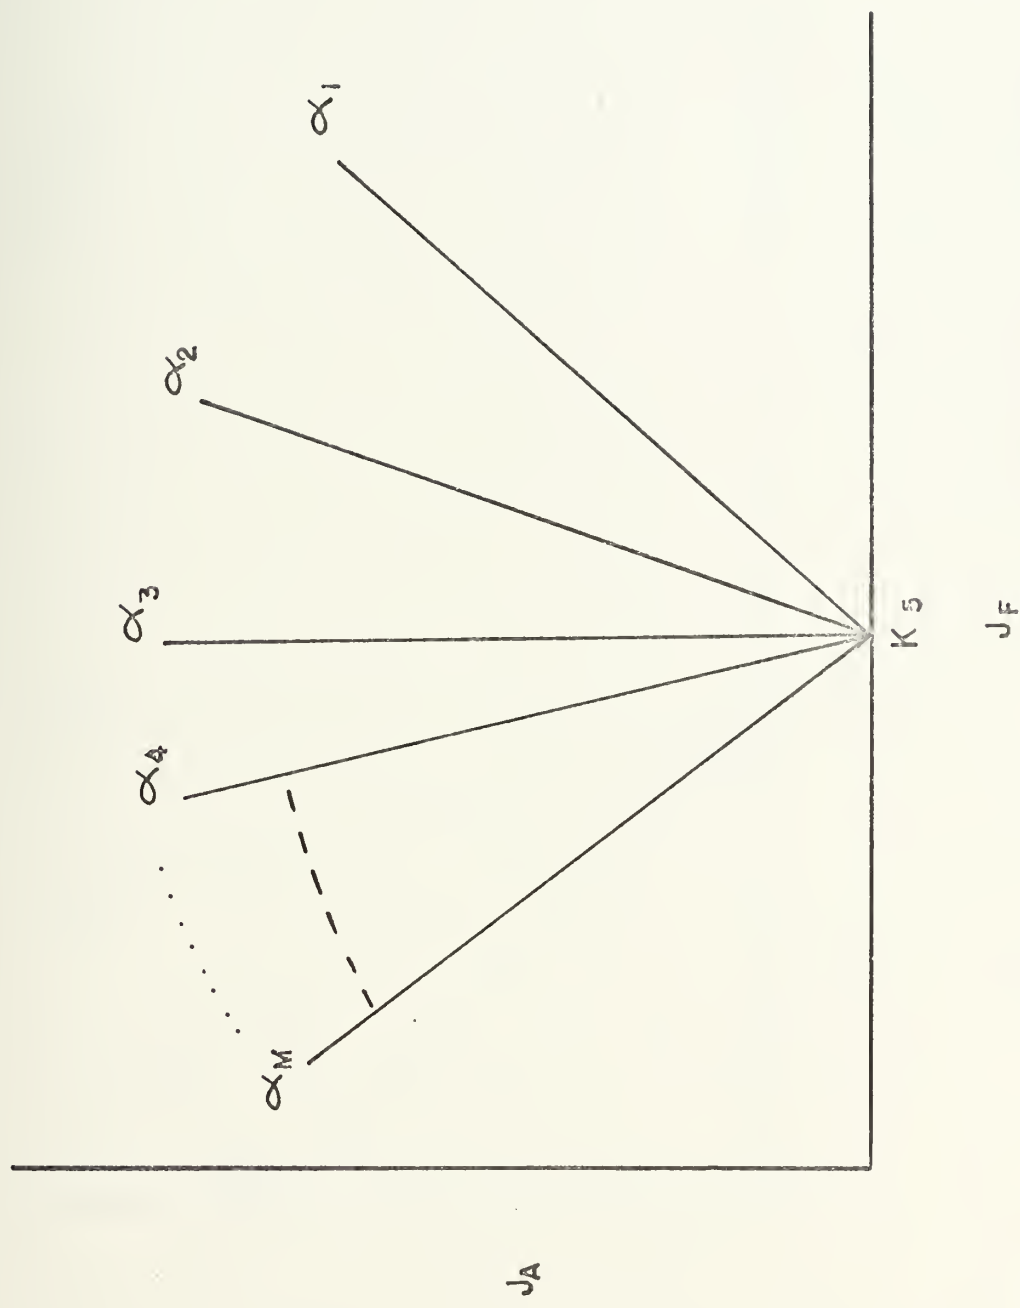
FIGURE 11. J_A AS A FUNCTION OF J_F FOR A FIXED POWER FACTOR:
OVEREXCITED MODE.

37
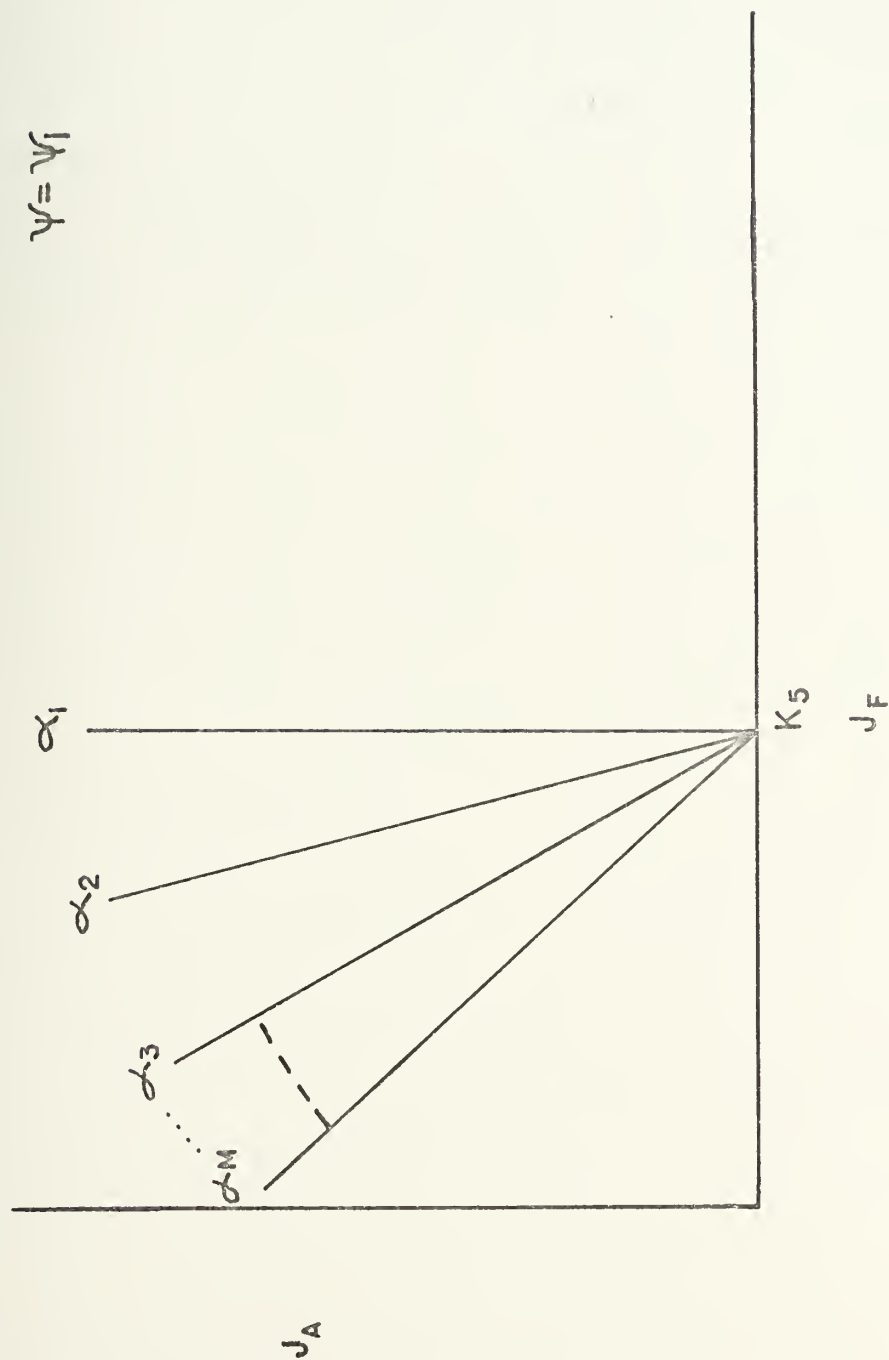
FIGURE 12. J_A AS A FUNCTION OF J_F FOR A FIXED POWER FACTOR: UNDEREXCITED MODE.

only positive slopes for equation E44 if the machine is under-
excited. A classical "V-curve" for the synchronous motor can
only be obtained if $\alpha = 90°$. From Figure 10 this yields the
same magnitude of λ regardless of the machine excitation,
and a "V-curve" is obtained for each value of $\pm\psi$.

Otherwise, if $\alpha \neq 90°$, from Figure 10, it is evident
that the magnitude of λ is not the same for both $a + \psi$ and
$a - \psi$. Therefore the "V-curve" will not be symmetric about
a vertical line through $J_f = K_5$.

IV. RESULTS

Utilizing the program listed in Appendix E (THESIS I) a feasible machine, whose physical and operating parameters are listed in Table 3, was developed. This machine employs a compensator physically positioned concentric with and outside of the main superconducting field winding.

Figure 13 is a plot of some of the designs investigated during the course of the development of this thesis. All machines in Figure 13 have the compensator winding physically located between the armature and the main field windings. Adjacent to each data point is printed the per unit synchronous reactance at the power level indicated. Each machine plotted in both Figures 12 and 13 are designed at the upper limit of armature current density (J_a = 2.5 x 10^6a/m^2). All machines plotted in Figure 13 were designed at the upper limit of field current (1.25 x 10^8a/m^2). All machines were assumed to operate from a 60hz bus and configured for two pole-pairs.

Figure 15 is a plot of magnetic shear stress as a function of power for a number of machines with the compensator outside of the main field winding.

Tables 1 and 2 are provided to augment the data plotted in Figures 12, 13, and 14.

The machine presented herein is rated at 22,700 horse-power before losses, and is intended to operate as part of the main propulsion system for the aforementioned hydrofoil. This choice is purely arbitrary, and the SES or SWATH

40

PER-UNIT SYNCHRONOUS
REACTANCE PRINTED ABOVE
EACH DATA POINT.

.088

.033 .031
.083 F

.096

.048

.115

.077

.028

.048
E

.062

.005
D

.027
A

.072

.047

.074 .092

.049 .082
.100
.066 .074

.075 .093

.076 .035
.197
BI   .067   .100
.061   .159
C   H   .255
D   G

.053

.059

.066 .083

.08

.069
.075

.046

30

25

HPX10⁻³ 20

15

10

5

0

1. 1.1 1.2 1.3 1.4 1.5 1.6 1.7 1.8 1.9 2.0 2.1 2.2 2.3 2.4 2.5 2.6 2.7 2.8

J_CX10⁻⁶ A/M²
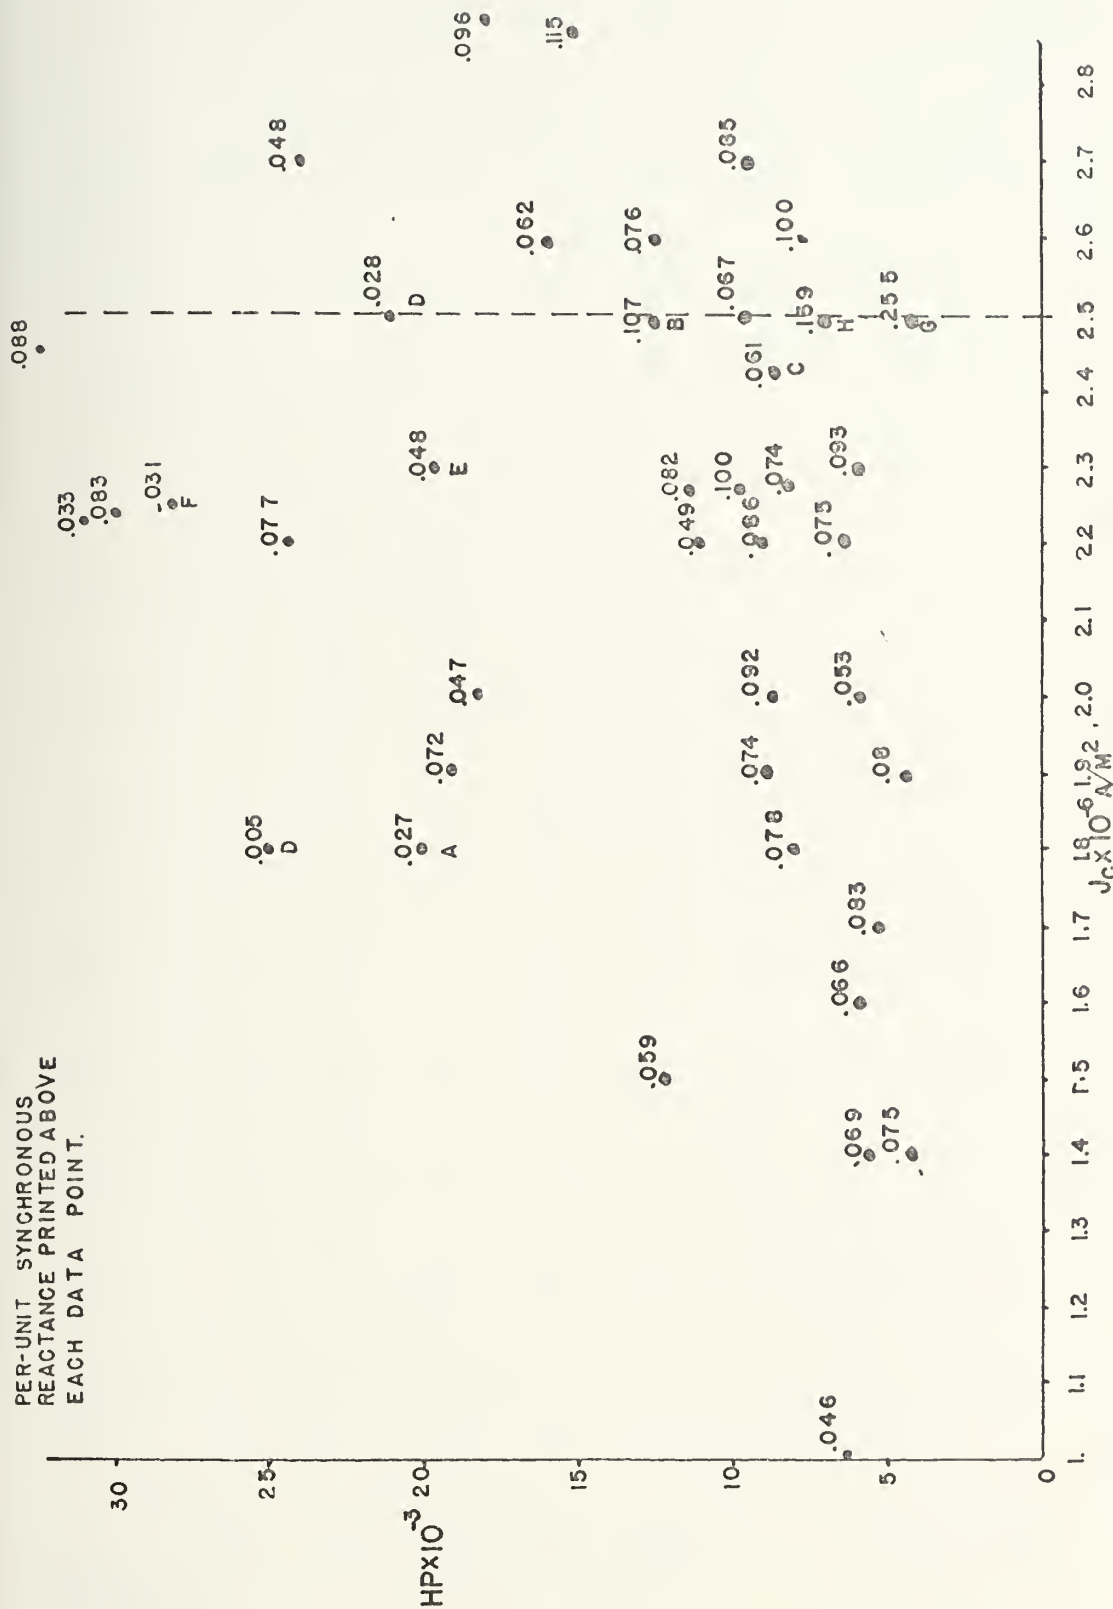
FIGURE 13. J_C AS A FUNCTION OF HORSEPOWER FOR MACHINES WITH
COMPENSATOR INSIDE OF FIELD.

Machine Code (see Fig. 12)	R_{ai} (in)	R_{ao} (in)	R_{ci} (in)	R_{co} (in)	R_{fi} (in)	R_{fo} (in)	R_{si} (in)	R_{so} (in)	PF	$J_F \times 10^{-8}$ (a/m²)	ℓ (in)	σ_m (psi)	x_d (pw)	Rated Power (hp) $\times 10^3$
A	7.	9.	9.5	10.5	11.	11.75	12.25	16.25	.8	1.25	30	58	.027	20.
B	7.	11.	11.5	12.75	12.75	13.25	13.75	17.75	.55	.8	25	42	.094	13.
C	7.	9.5	10.	10.5	11.	11.75	12.25	16.25	.8	1.25	10	50	.061	7.6
D	7.	9.	9.5	10.25	10.75	11.5	12.	16.	.8	1.25	35	42.5	.028	21.
E	6.	9.5	10.	11.	11.5	12.	12.5	16.5	.6	1.25	30	51	.048	19.5
F	6.	9.5	10.	11.	11.5	12.25	12.75	16.75	.55	1.25	30	75	.031	27.
G	6.	9.5	10.	11.	11.5	11.75	12.25	16.25	.8	.4	30	7.5	.255	4.5
H	6.	9.5	10.	11.	11.5	12.	12.5	16.5	.7	.4	30	13.8	.139	6.1

TABLE 1. Machine Data Extracted For Machines Plotted On Figure 13--Compensator Inside Field

PER-UNIT SYNCHRONOUS
REACTANCE PRINTED ABOVE
EACH DATA POINT.
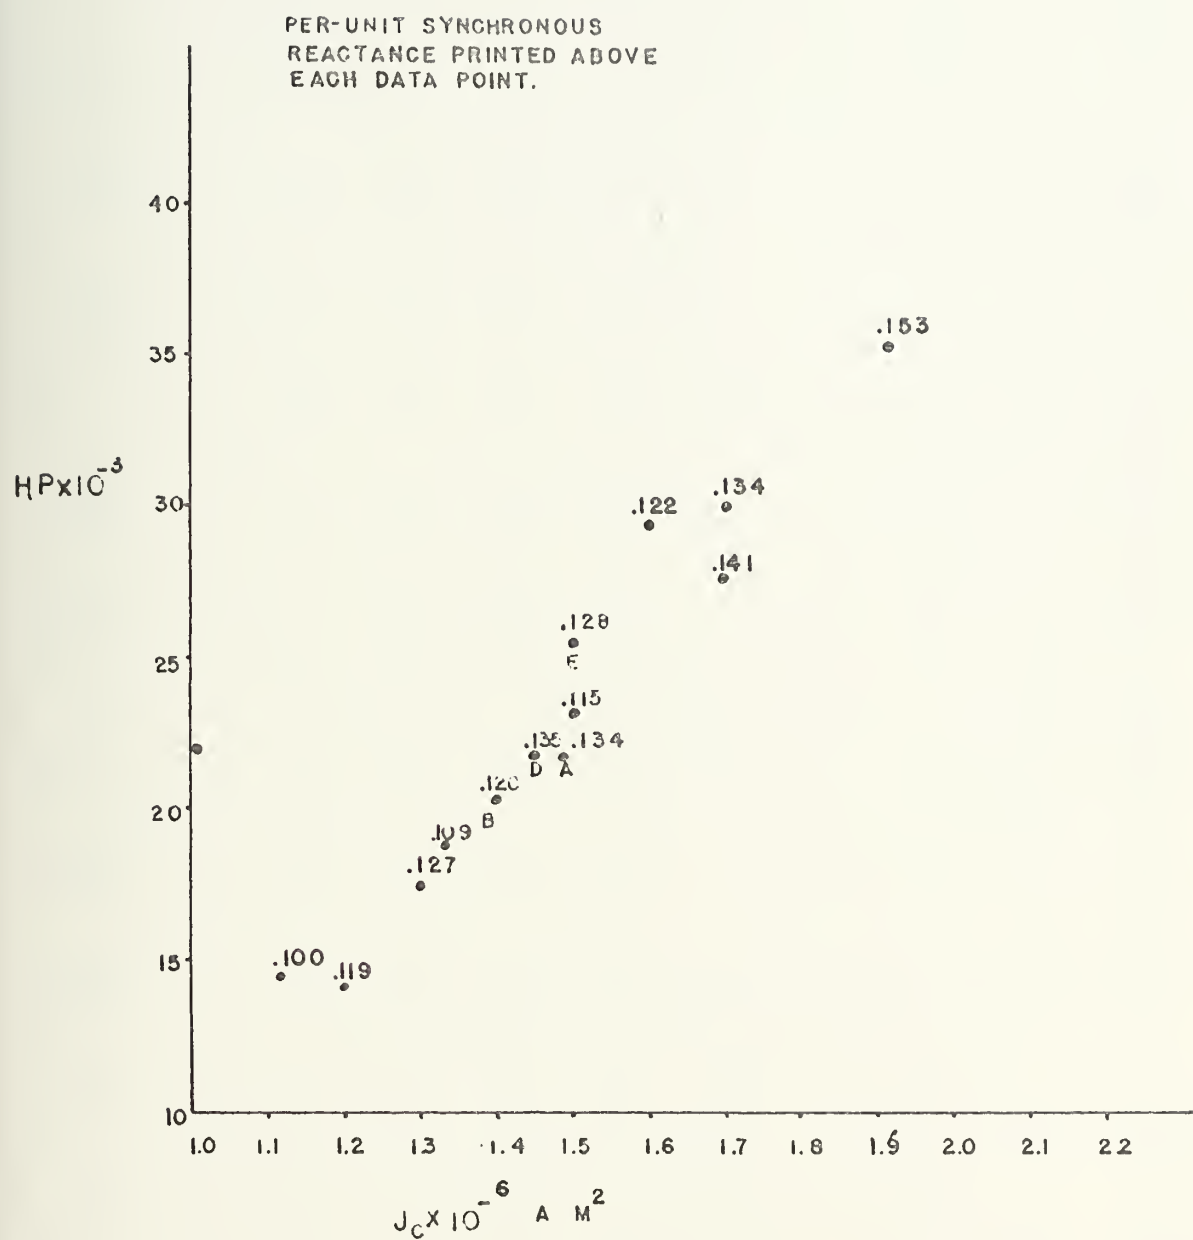
FIGURE 14. J_c AS A FUNCTION OF HORSEPOWER FOR MACHINES
WITH COMPENSATOR OUTSIDE OF FIELD.

Machine Code (see Figs. 13 & 14)	R_{ai} (in)	R_{ao} (in)	R_{fi} (in)	R_{fo} (in)	R_{ci} (in)	R_{co} (in)	R_{si} (in)	R_{so} (in)	PF	ℓ (in)	σ_m (psi)	x_d (pu)	Rated Power (hp) $\times 10^{-3}$	J_f $\times 10^{-8}$ a/m²
A	7.	11.5	12.	13.	13.5	15.5	16.	20.	.85	30	30	.134	21.5	.4
B	7.	11.	11.5	12.5	13.	15.	15.5	19.5	.85	35	26.7	.12	21.	.4
C	7.	10.	10.5	11.5	12.	14.	14.5	18.5	.85	30	41.	.056	22.	.8
D	7.	11.	11.5	12.5	13.	15.	15.5	19.5	.85	30	30.	.135	22.5	.4
E	7.	11.5	12.	13.	13.5	15.5	16.	20.	.85	35	35.	.128	25.	.4

TABLE 2. Machine Data Extracted For Machines Plotted On Figures 14 and 15. Compensator Outside Field
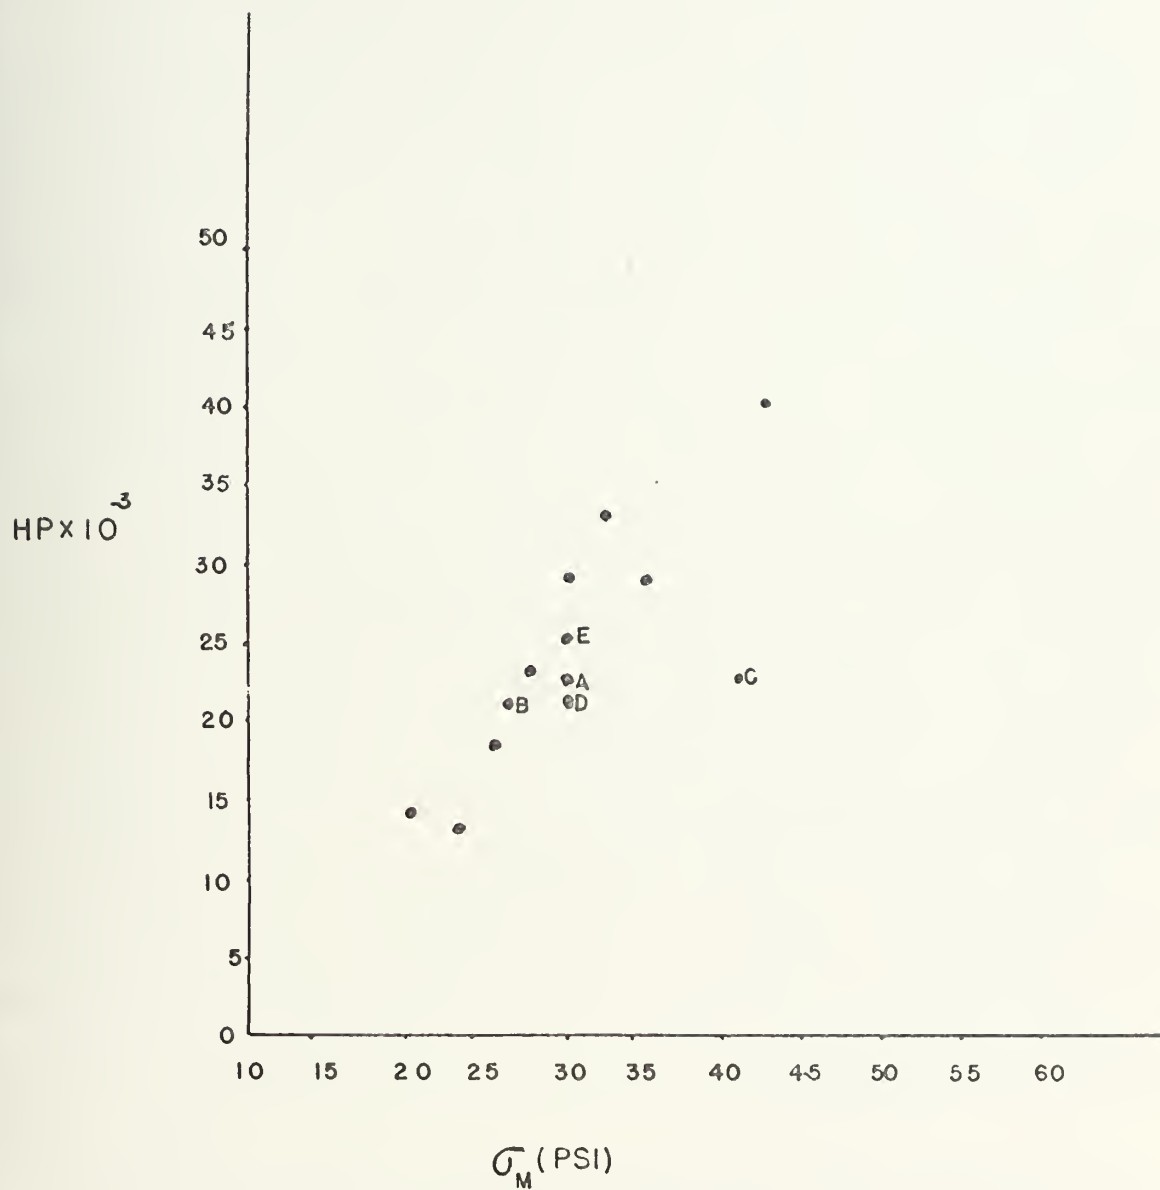
FIGURE 15. σ_M AS A FUNCTION OF HORSEPOWER FOR MACHINES WITH COMPENSATOR OUTSIDE OF FIELD.

application could have been chosen for illustration with correspondingly higher horsepower ratings.

Figure 16 shows J_c as a function of J_a for a fixed field current and a fixed value of the phase angle between the main superconducting field and the compensator field. The plots indicate a relatively simple control problem, without the need for mechanical components in the control loop.

As discussed earlier, another option available to control the torque on the main field winding is physical angular adjustment of the main field winding (angle α in Figure 1), with a constant value of the compensator current density, J_c. Figure 17 shows the effects of varying angle α and J_a on machine power output. The small circles on the $\alpha = 10°$ and 20° plots indicate the operating point at which J_c exceeds the constraint of $2.5 \times 10^6 a/m^2$. In the other plots, $\alpha \geq 30°$, the constraint on J_c is not exceeded, but as shown, a similar constraint on J_a is reached prior to reaching the J_c constraint. Therefore, for the machine described in Table 3 the limiting value for the current density in the compensator is not exceeded for $\alpha \geq 30°$.

Figure 18 depicts the variation required in angle α for constant values of J_c as J_a or power varies. It is again noted that the power level at any angle α and any armature current density, J_a, is also a function of the compensator current density, J_c. In the limiting case of $\alpha = 0°$ electrically, the compensator would act as only as a power augmenting field element and in order to maintain zero torque on the

46
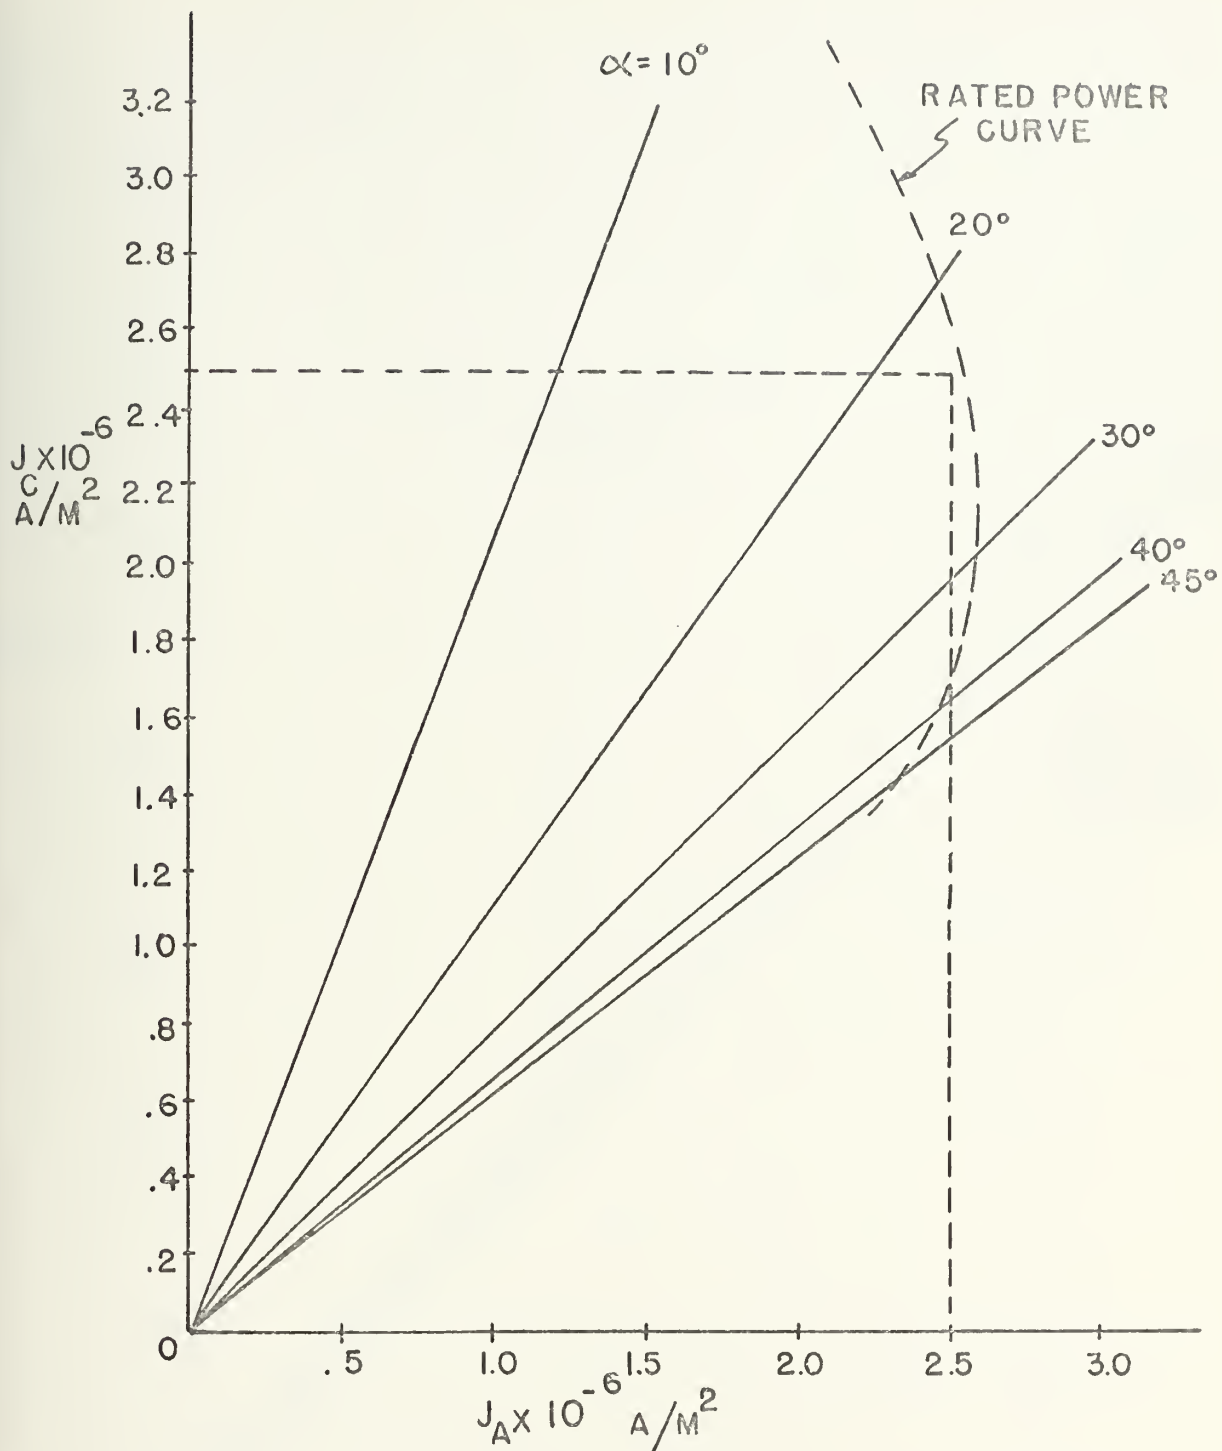
FIGURE 16. J_C AS A FUNCTION OF J_A FOR SELECTED
MOTOR DESCRIBED IN TABLE 3.

47
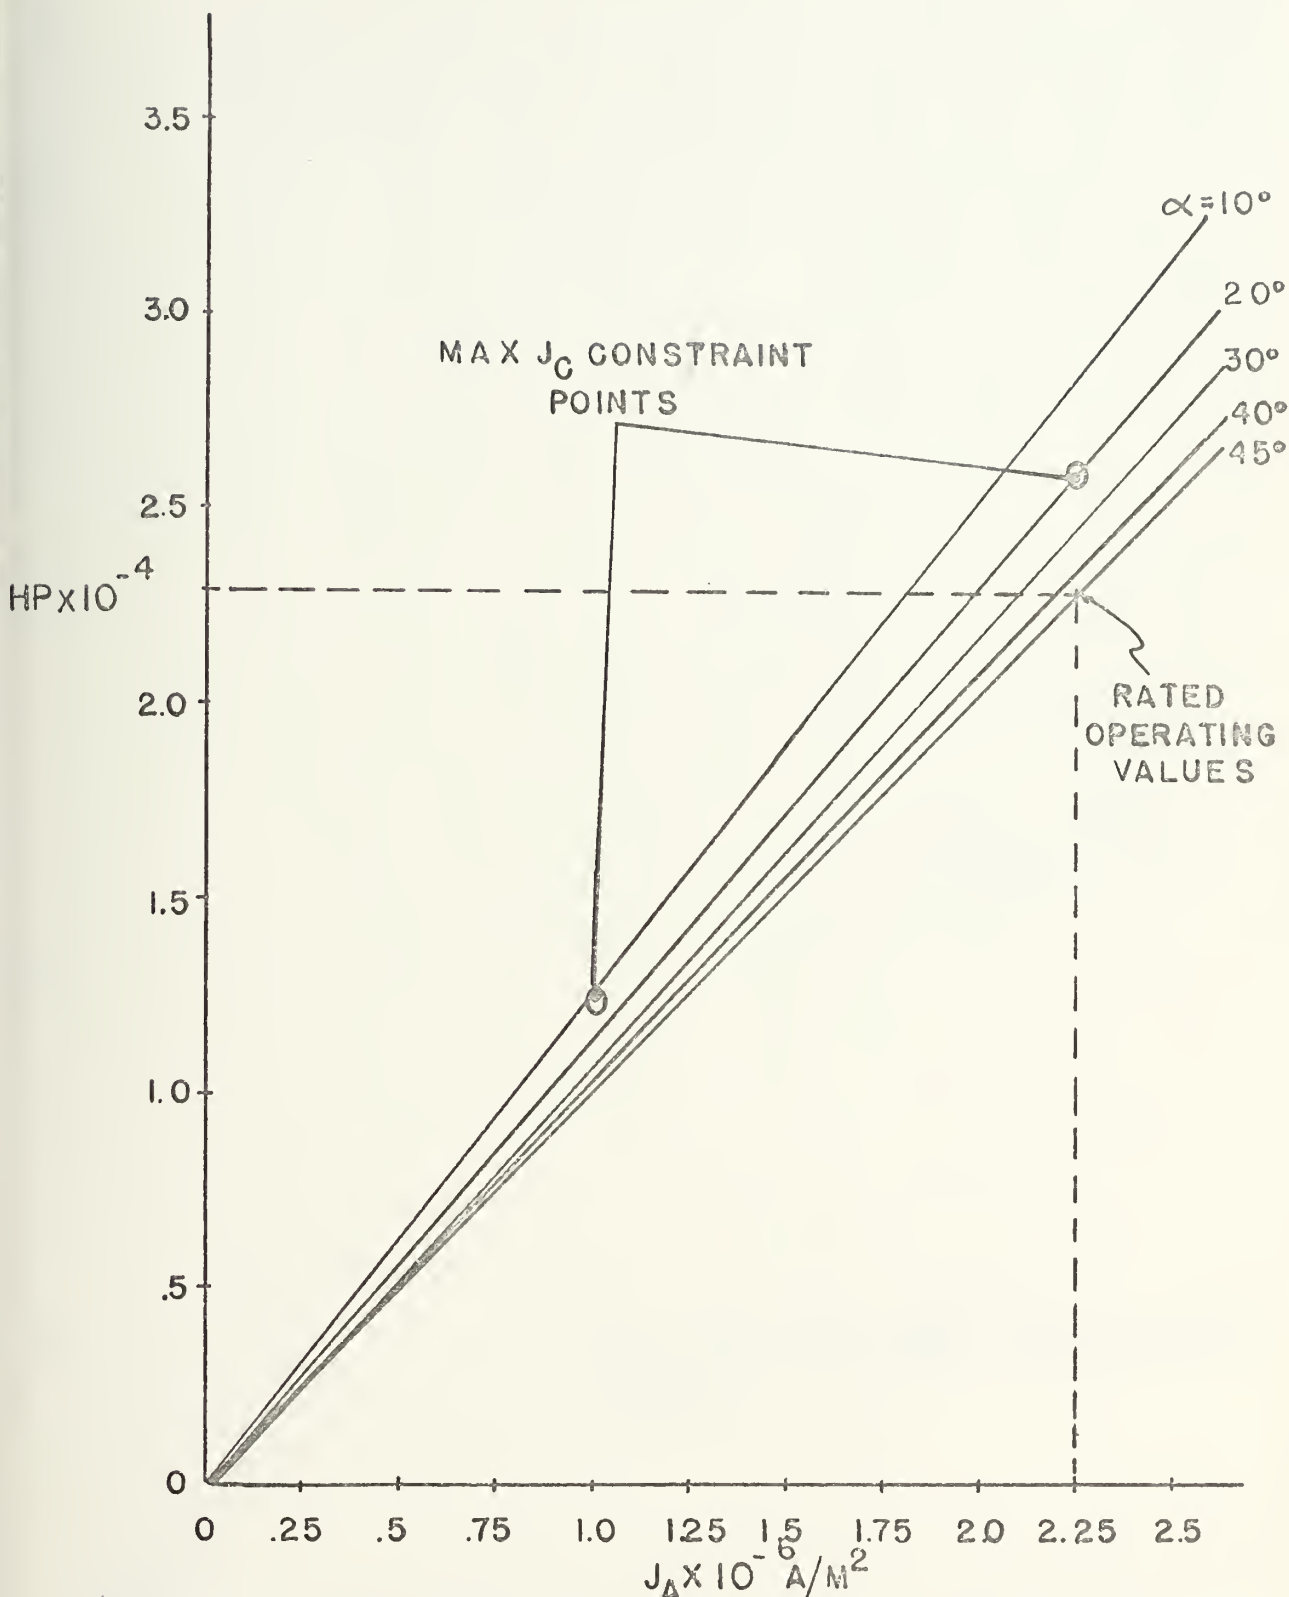
FIGURE 17. HORSEPOWER AS A FUNCTION OF J_A FOR SELECTED MACHINE DESCRIBED IN TABLE 3.

48

FIGURE 18. α AS A FUNCTION OF J_A FOR SELECTED MACHINE DESCRIBED IN TABLE 3.
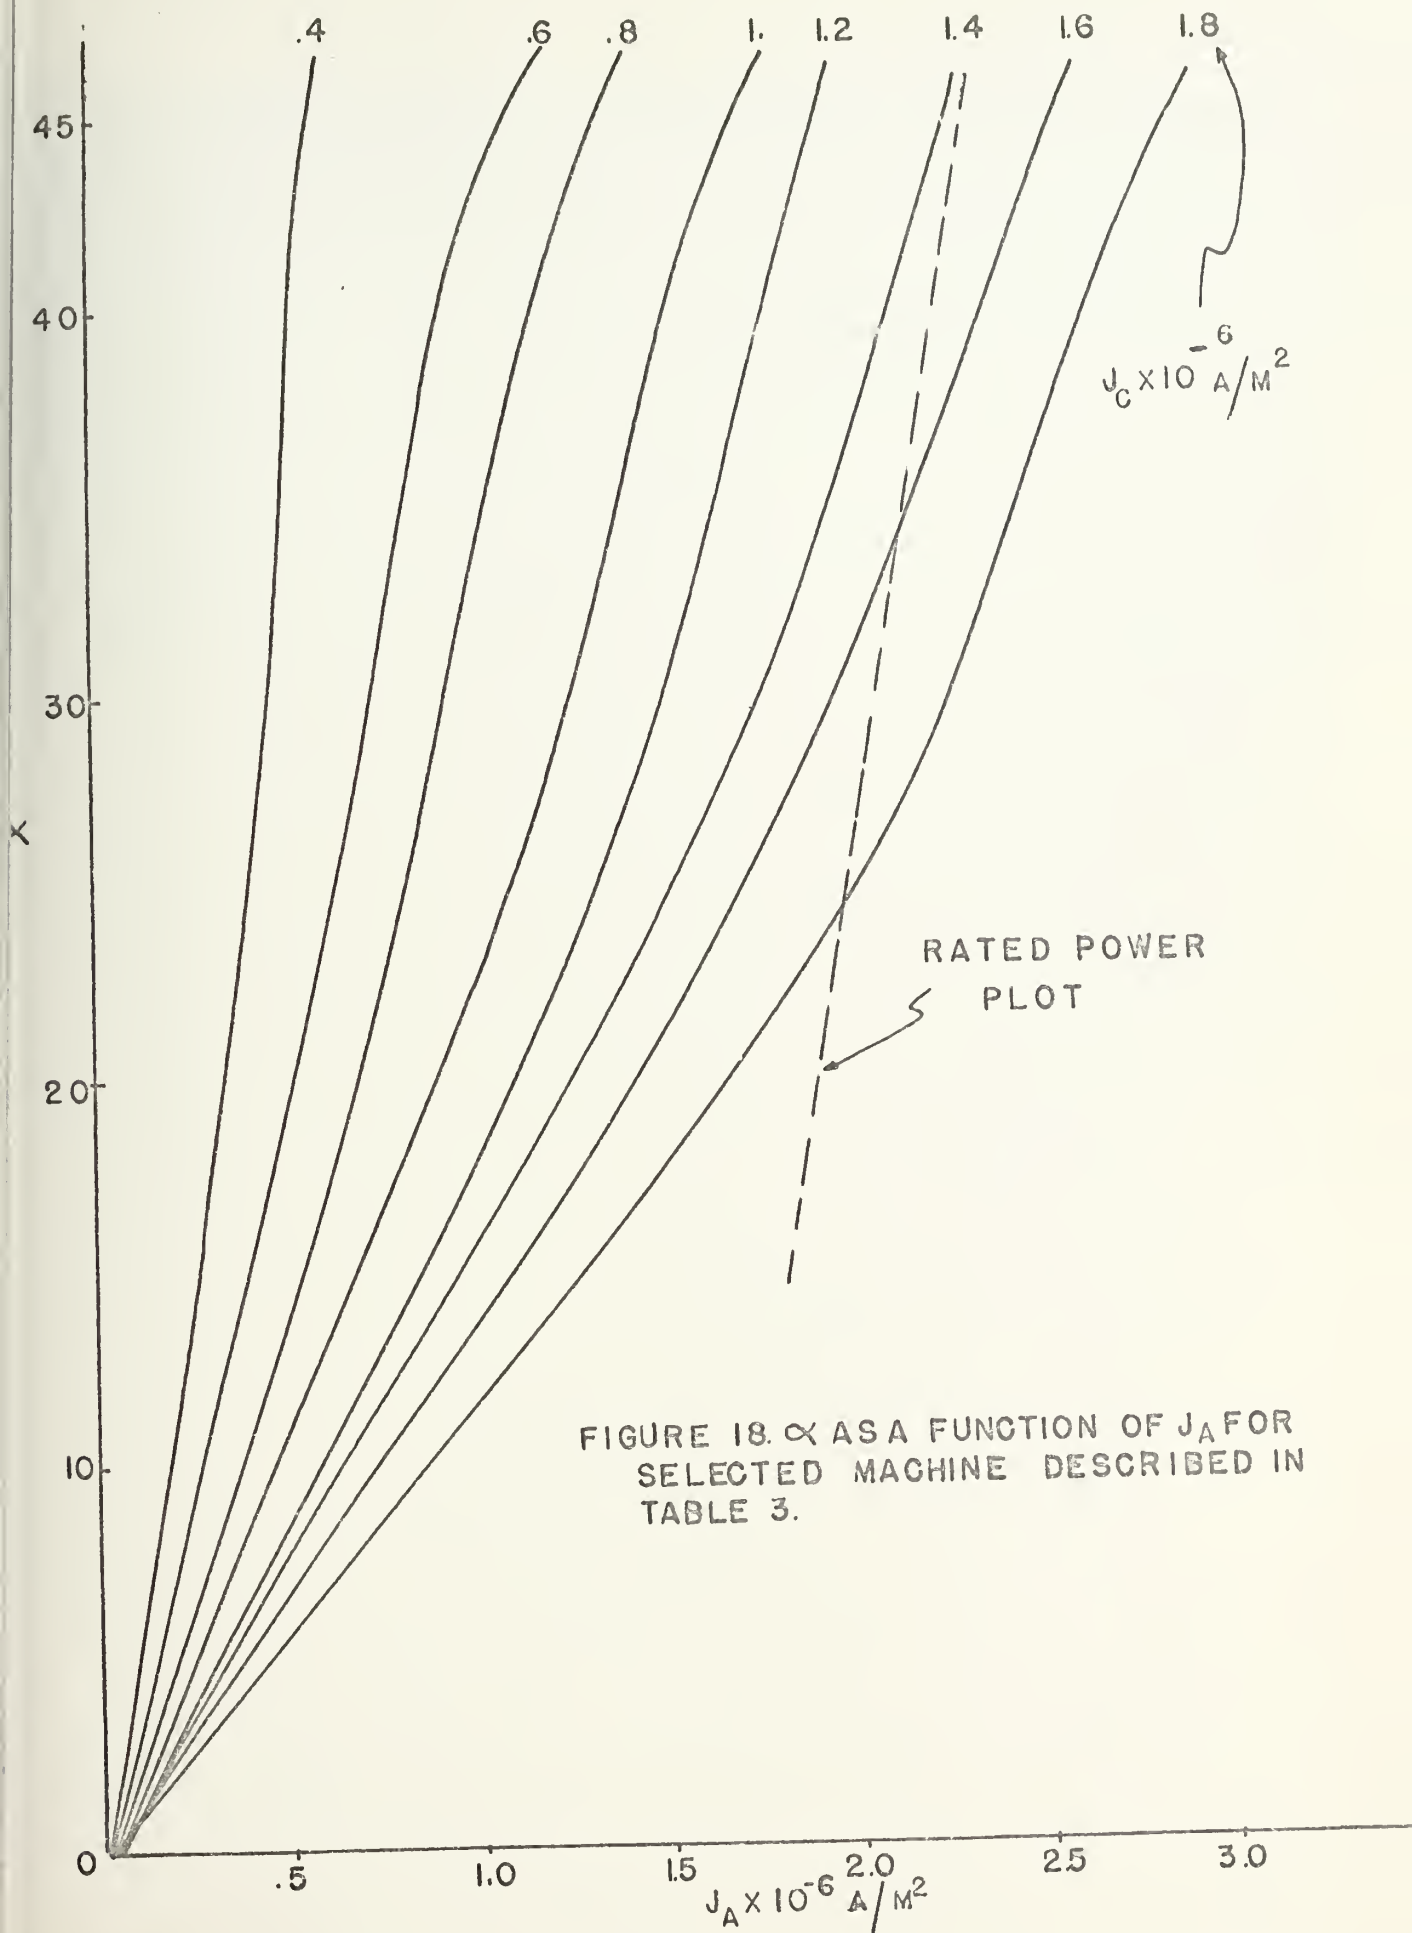
superconducting field, an infinite amount of current would be
required in the compensator.

V. DISCUSSION OF RESULTS AND CONCLUSIONS

As indicated in Figures 13 and 14, a significant number of machine designs were investigated using the analysis developed and constraints specified herein. THESIS I, as listed in Appendix F, was employed extensively as a design tool.

No machine with the compensator located between the superconducting field and armature was found to be satisfactory either because of a firm constraint violation (high current densities or low shear stresses) a because of unacceptably low values of per-unit synchronous reactance. It is recognized that low values of per-unit synchronous reactance present problems primarily during machine transients and because of the extraordinary sequence of events that must occur to induce a major casuality to the motor, low values may not be meaningful either to the designer or operator. Figure 13, augmented by Table 1, does indicate some machines (such as machine A, D, E, or F) which are theoretically plausable but have either low per-unit synchronous reactances or poor power factors at designed power levels, or both. The inability to obtain satisfactory machines at high power levels ($\geq$ 20,000 hp) is attributed to the pronounced decrease in field strength in the radial direction. Consequently, with the compensator located between the superconducting field and the armature, lower power must be expected than that produced from a machine with the compensator located outside of the

field winding, for the same superconductor, compensator, and armature winding areas.

In summary, the machine with the compensator located inside of the superconducting field presents many design problems because each machine investigated at rated power either exceeds or approaches the design constraints.

On the other hand, a motor with the compensator located between the superconducting field winding and the shield is less demanding in terms of the design constraints. Figure 14 depicts rated horsepower as a function of compensator current density for a number of designs investigated. The machine parameters used as constraints are not approached, and as indicated in Figures 14 and 15 and Table 2 acceptable values of per-unit synchronous reactance and power factor are easily realized. If Figures 15 and D1 are compared, the values of σ_m for those machines investigated are acceptable.

Table 3 presents data for a feasible machine to be employed as a main propulsor for a hydrofoil. The compensator, superconducting field, and armature current densities are all well within the constraints outlined in Section III of this paper. An optimun machine was not investigated, and possibly a machine of smaller dimensions could be synthesized.

Of the three options discussed earlier to control the torque on the superconductors, fixing the angle α at 90° electrically is, from the author's point of view, the better choice because such a mode of operation allows the widest possible locus of operation as depicted in Figure 7.

52

TABLE 3. DATA FOR A FEASIBLE TORQUE-COMPENSATED MACHINE

Parameter	Value
Design Horsepower	22,700 shp
Power Factor	.85
KVA Rating	35.8 KVA
Design RPM	1800
Rated Compensator Current Density, J_c	1.4×10^6
Rated Field Current Density, J_f	$4. \times 10^7$
Rated Armature Current Density, J_a	2.25×10^6
Rated Terminal Phase Voltage	6300 volts PMS
Rated Terminal Line Voltage, V_T	10,000 volts PMS
Phase Angle Between Main and Compensator Fields, α	45°
Armature Winding Angle, θ_{wa}	28°
Field Winding Angle, θ_{wf}	80°
Compensator Winding Angle, θ_{wc}	80°
Armature Space Factor, λ	.27
Armature Winding Inside Radius, R_{ai}	7."
Armature Winding Outside Radius, R_{ao}	11.5"
Field Winding Inside Radius, R_{fi}	12."
Field Winding Outside Radius, R_{fo}	13."
Compensator Winding Inside Radius, R_{ci}	13.5"
Compensator Winding Outside Radius, R_{co}	15.5"
Shield Inside Radius, R_{si}	16."
Shield Outside Radius, R_{so}	18"
Shield Permeability, μ_s	.009 hy/in

TABLE 3 continued

Parameter	Value
Total Machine Length, ℓ_t	72"
Straight Section Length, ℓ	35"
Synchronous Reactance (per unit), x_d	.1156
Armature Conductivity	$\sigma = 6 \times 10^7$ mho/m
End Turn Length ($R_{ai} + R_{ao}$)	18."
Effective <u>Lengths</u> For:	
Self Inductance, Armature	53"
Self Inductance, Field	35"
Self Inductance, Compensator	35"
Mutual Inductance, Field-to-Armature	35"
Mutual Inductance, Compensator-to-Armature	35"
Conductor Loss	72"
Eddy-Current Loss	35"
Losses at Rated Conditions:	
Conductions (compensator and shield)	200 hp
Eddy-currents	15 hp
Total, percent of rating	.94%
Ratio of ℓ_t/D (see Table D1)	1.8

Figure 8 indicates that for any other <u>fixed</u> value of α, a more limited locus is to be expected. Figure 16 shows that as angle α is reduced from 45° mechanically for a four pole machine, a higher value of compensator current is required at any particular value of J_A (or any particular power level since V_T is assumed constant). Such an arrangement also eliminates the need for moving interfaces between the super-conducting field winding or the compensating winding. This means that rotating fluid cryogenic couplings and slip rings are not necessary; and consequently should both improve machine reliability and simplify the mechanical design.

The primary disadvantages of employing this technique is a slower compensator response to machine load changes and the added complexity of an external feedback loop required to control J_c.

Figure 17, plots of motor horsepower as a function of J_a for the machine described in Table 3, indicates an increase in horsepower due to the improved armature-to-compensator coupling as angle α is varied. As discussed earlier, if angle α is permitted to go to 0°, the compensator field aligns with the superconducting field and acts only as a power element, no longer capable of compensating the super-conducting field without infinite currents in the compensating winding. Some compensation, of course, would be realized at $\alpha = 0$° because the compensator would absorb some torque, but its value would be insignificant compared to that carried by the superconducting field.

A viable alternative, as briefly addressed above, but not as advantageous from the standpoint of hardware reliability and mechanical design is to mount either the superconducting field winding or the compensating winding on bearings (possibly a self-aligning ball or cylindrical bearing) and allow the element to seek the proper value of angle α at some fixed J_c as power level changes. Figure 18 predicts the behavior of the element for various values of J_c as the power level varies. The machine depicted is that described in Table 3, and the terminal voltage is assumed constant. The advantages of such a mode of operation are rapid response of the compensator to changes in load, and the elimination of the external feedback control system necessitated in the system mentioned above.

Since either the superconducting field winding or the compensating winding can be gimbled, the designer has an additional choice of configurations; both of which require moving interfaces with the environment. If the superconducting field is fixed, the rotating cryogenic coupling is not required and only power slip rings are necessary to provide power to the compensator which, of course, would be gimbled. Otherwise, if the compensator is fixed, the main super-conducting field requires both cryogenic and electrical interfaces. Because of the initial conclusion presented herein, which placed the compensator outside of the super-conducting field, a fixed compensator and a gimbled main field would further complicate the machine's mechanical design.

56

As may be seen above strong cases for either mode of operation can be made; but because this machine is envisioned to be employed in naval or possibly marine vehicles, the author feels that machine reliability should play an important role in the design decision. Therefore, a fixed compensator and superconducting field with a variable compensator current is recommended.

VI. RECOMMENDATIONS

Additional areas that could be investigated using the material developed in this thesis are:

1. Develop field equations in terms of α_o and α_i and apply results to develop steady state and transient machine performance.

2. Construct, as an initial prototype, a small non-cryogenic machine and examine machine behavior.

3. On a systems level, develop alternative power trains based on system volume, weight, arrangements, efficiency, and complexity for various naval applications.

4. Synthesize a control system model for the motor operating at a constant value of α, varying J_c with power level.

5. Develop transient and steady-state behavior of machine with variable shield permeability by modeling the shield magnetization characteristics.

APPENDIX A

FIELD ANALYSIS

This Appendix addresses the derivation of the basic
field equations for the machine under consideration. The
technique employed is that discussed in references 2 and 3
which utilizes axially constant boundary conditions expressed
as ratios of radial and azimuthal fields. The use of these
ratios, referred to as surface coefficients, simplifies the
arithmetic involved and permits a wide range of boundary
conditions to be applied to the machine problem after the
solutions are formalized.

In the most general form, Ampere's circutial law may
be expressed as:

$$\overline{\nabla} \times \overline{H} = \overline{J} + \frac{\partial \overline{D}}{\partial t} \tag{A1}$$

The primary concern here is with the fields within the
machine air-gaps which are current-free, where Ampere's Law
may be expressed as follows:

$$\overline{\nabla} \times \overline{H} = \frac{\partial \overline{D}}{\partial t} \tag{A2}$$

Assuming that the $\overline{E}$ fields do not vary with time,
Ampere's Law becomes:

$$\overline{\nabla} \times \overline{H} = 0 \tag{A3}$$

The electromagnetic fields may be specified by a system
of equipotentials which are cut at right angles by lines of
magnetic force. This property of orthogonality between the
lines of force and the equipotential surfaces leads to some
relatively simple geometric conditions. Define:

ψ = magnetic flux function

Φ = magnetic potential

The family of curves, Φ = constant and ψ = constant,
are orthogonal and this constraint may be expressed in polar
coordinates as:

$$\frac{\partial \Phi}{\partial r} \cdot \frac{\partial \psi}{\partial r} = - \frac{\partial \Phi}{r \partial \theta} \frac{\partial \psi}{r \partial \theta} \qquad (A4)$$

From the theory of functions of a complex variable[1],
the functions Φ and ψ are analytically related via the
complex variable

$$z = x + jy \qquad (A5)$$

Converting A5 into polar coordinates

$$x = r \cos\theta \text{ and } y = r \sin\theta$$

therefore

$$\Phi + j\psi = f[r(\cos\theta + j\sin\theta)] \tag{A6}$$

Differentiating A6 partially with respect to r and θ successively, a comparison of the results indicates

$$\frac{\partial\Phi}{\partial r} = \frac{\partial\psi}{r\partial\theta} \tag{A7}$$

$$\frac{\partial\Phi}{r\partial\theta} = -\frac{\partial\psi}{\partial r} \tag{A8}$$

Differentiating A7 with respect to r yields

$$\frac{\partial^2\Phi}{\partial r^2} = \frac{1}{r}\frac{\partial^2\psi}{\partial r\partial\theta} - \frac{1}{r^2}\frac{\partial\psi}{\partial\theta} \tag{A9}$$

Differentiation of A8 with respect to θ yields

$$\frac{\partial^2\Phi}{r\partial\theta^2} = -\frac{\partial^2\psi}{\partial r\partial\theta} \tag{A10}$$

The elimination of derivations of ψ using A9 and A10 shows

$$\frac{\partial^2\Phi}{\partial r^2} + \frac{\partial\Phi}{r\partial r} + \frac{\partial^2\Phi}{r^2\partial\theta^2} = 0 \tag{A11}$$

All is recognized as Laplace's equation in two dimensions (r,θ)

$$\overline{\nabla}^2\ \Phi = 0 \tag{A12}$$

From the principles of vector calculus it is known that in a conservative magnetic field region in space where $\overline{\nabla} \times \overline{H} = 0$, there exists a scalar potential such that

$$\overline{H} = -\overline{\nabla}\phi \qquad\qquad (A13)$$

A13 in cylindrical coordinates may be written as

$$H_r = -\frac{\partial \phi}{\partial r}; \qquad H_\theta = -\frac{\partial \phi}{r\partial \theta} \qquad\qquad (A14)$$

Notice that the machine is modeled in two dimensions only and therefore $H_z \equiv 0$. Equations A11 or A12 may now be solved with the appropriate boundary conditions and using A14, the components of $\overline{H}$ may be found in cylindrical components.

Using separation of variables (see reference 1, pages 434-435) equation A11 may be solved by first assuming a solution of the form

$$\phi(r,\theta) = R(r)\,\Theta(\theta) \qquad\qquad (A15)$$

Differentiating A15 appropriately,

$$\frac{\partial \phi}{\partial r} = \Theta R' \; ; \; \frac{\partial^2 \phi}{\partial r^2} = \Theta R''$$

$$\qquad\qquad (A16)$$

$$\frac{\partial \phi}{\partial \theta} = R \Theta \; ; \; \frac{\partial^2 \phi}{\partial \theta^2} = R \Theta''$$

62

Substituting A16 into A11

$$R'' \, \Theta \; + \; \frac{1}{r} \, R' \, \Theta \; + \; \frac{1}{r^2} \, R \, \Theta'' \; = \; 0 \qquad\qquad \text{(A16a)}$$

And, upon separating variables

$$\frac{1}{R}(r^2 R'' + rR') \; = \; - \frac{\Theta''}{\Theta} \; = \; k^2 \qquad\qquad \text{(A17)}$$

Where $k^2 \equiv$ separation constant

Because the left hand member of A17 is by hypothesis independent of θ and the right hand member is independent of r, it follows that both sides must be independent of both r and θ and equal to a separation constant, k^2. With some insight as to the form of solution expected, designate k^2 as the constant. Equation A17 implies the following set of second order ordinary differential equations.

$$r^2 R'' + rR' - k^2 R = 0 \qquad\qquad \text{(A18)}$$

$$\Theta'' + k^2 \, \Theta \; = \; 0 \qquad\qquad \text{(A19)}$$

The sign of k^2 is chosen at the stage of the analysis so that periodic functions which are continuous will appear in the solution of A18 rather than exponentials (sinh) in the θ direction. Equation A18 is an equidimensional linear second order equation and may be solved as follows:

assume $R = r^\lambda$, $k > 0$ (A20)

Differentiating and substituting A20 into A18

$$\lambda(\lambda-1)r^\lambda + \lambda r^\lambda - k^2 r^\lambda = 0$$

$$\lambda = \pm k \qquad \text{(A21)}$$

and,

$$R = a_k r^k + b_k r^{-k} \qquad \text{(A22)}$$

assume $R = r^\lambda$, $k = 0$ (A23)

Differentiating A23 and substituting into A18

$$r^2 R'' + rR' = 0$$

$$\frac{R''}{R'} = -\frac{1}{r}$$

$$\ln R' = -(\ln r)'$$

$$\ln R' = -\ln r + \ln b_o$$

$$R' = \frac{b_o}{r}$$

$$R = a_o + b_o \ln r \ , \ k = 0 \qquad \text{(A24)}$$

Equation A19 is an ordinary second order linear equation with constant coefficients, and yields the general solution:

$$\theta = c_k \cos k\theta + d_k \sin k\theta \ , \ k > 0 \qquad (A25)$$

$$\theta = c_o + d_o \theta \ , \ k = 0 \qquad (A26)$$

Substituting A23 through A26 into A15 the general solution of A11 is found to be

$$\Phi(r,\theta) = A_o + B_o \ln r + (C_o + D_o \ln r)\theta +$$

$$\sum_k [(A_k r^k + B_k r^{-k})\cos k\theta + (C_k r^k + D_k r^{-k}) \sin k\theta] \qquad (A27)$$

The following constant equalities are applicable to A27:

$$A_o = a_o c_o \qquad\qquad A_k = a_k c_k$$

$$B_o = b_o c_o \qquad\qquad B_k = b_k c_k$$

$$\qquad\qquad\qquad\qquad\qquad\qquad\qquad (A28)$$

$$C_o = a_o d_o \qquad\qquad C_k = a_k d_k$$

$$D_o = b_o d_o \qquad\qquad D_k = b_k d_k$$

In order that $\Phi(r,\theta)$ be single valued set $a_o = c_o = d_o = 0$. For the same reason, the periodic part of A27 must possess

a period of 2π. This requirement leads to the permissible

values of the separation constant k.

$$k = np; \quad n = 1, 2, 3, \ldots\ldots; \quad p = 1, 2, 3, \ldots\ldots$$

It will be later shown in this analysis that n may assume

only odd positive non-zero integer values. p is also later

defined as pole pairs in our analysis. If it is required that

$\Phi(r,\theta)$ to be defined at $r = 0$, b_0 must be 0, and A27 becomes

$$\Phi(r,\theta) = \sum_k [(A_k r^k + B_k r^{-k}) \cos k\theta + (C_k r^k + D_k r^{-k}) \sin k\theta]$$

(A29)

The solution of A29, subject to appropriate boundary

conditions, must meet the following additional requirements:

1. Be finite.

2. Be a solution of A11.

3. Satisfy the circuital or curl condition imposed

     by electromagnetic considerations.

4. As will be shown later, $\Phi(r,\theta)$ must be an odd

     periodic function of θ with a period of 2π.

Considering only one particular harmonic solution of A11,

A29 may be rewritten as

$$\Phi(r,\theta) = (A r^k + B r^{-k}) \cos k\theta + (C r^k + D r^{-k}) \sin k\theta$$

(A30)

realizing A, B, C, and D are functions of k.

66

Utilizing the technique developed in references 2 and 3, A30 may be written in complex form, and the general expressions for the magnetic fields and inductances (see Appendix B) may be developed. The machine will be characterized in terms of surface coefficients defined as functions of machine boundary conditions. These surface coefficients are then substituted into the general expressions for magnetic fields and inductances to find the specific solution desired. This approach allows the designer more flexibility in the machine analysis than the more classic approach of fixing the boundary conditions and then solving the magnetic field problem.

Writing A30 in complex notation:

$$\Phi = Re \, [\underline{A}r^k e^{-jk\theta} + \underline{B}r^{-k} e^{-jk\theta}] \tag{A31}$$

It may be shown that

$$\underline{A} = A + jC$$

$$\underline{B} = B + jD$$

Allowing Φ to vary both in space and time, A31 becomes:

$$\Phi = Re \, [(\underline{A}r^k + \underline{B}r^{-k}) e^{j(\omega t - k\theta)}] \tag{A32}$$

It is now possible to examine the definitions of the surface coefficients, s, and the reflection coefficients, α. A more detailed derivation may be found in references 1 and 2. Using A14 and A32

$$\bar{\bar{H}} = H_r \, \bar{i}_r + H_\theta \bar{i}_\theta \tag{A33}$$

when

$$H_r = -\text{Re}\,[(\underline{A}r^{k-1} - \underline{B}r^{-k-1})k e^{j(wt-k\theta)}] \tag{A34}$$

$$H_\theta = -\text{Re}\,[-j(\underline{A}r^{k-1} + \underline{B}r^{-k-1})k e^{j(wt-k\theta)}] \tag{A35}$$

A parameter referred to earlier as the surface coefficient which is the ratio of the radial to azimuthal component of the field is defined as

$$s \equiv \frac{H_r}{H_\theta} \tag{A36}$$

The complex surface coefficient is defined as

$$\underline{s} \equiv \frac{\underline{H}_r}{\underline{H}_\theta} = j \, [\frac{\underline{A}r^{k-1} - \underline{B}r^{-k-1}}{\underline{A}r^{k-1} + \underline{B}r^{-k-1}}] \tag{A37}$$

and the complex reflection coefficient is defined as

$$\underline{\alpha} \equiv \frac{1 + j \, \underline{s}(R)}{1 - j \, \underline{s}(R)} \tag{A38}$$

and it may be shown that

$$\underline{s}(r) = j\left[\frac{1 - \underline{\alpha}\left(\frac{R}{r}\right)^{2k}}{1 + \underline{\alpha}\left(\frac{R}{r}\right)^{2k}}\right]$$

(A39)

A39 allows $\underline{s}(r)$ to be transferred from one boundary to another in the radial direction. The development of this expression is addressed in more detail in reference 2.

Table A1 below reflects the values of $\underline{\alpha}$ and $\underline{s}$ for the boundary conditions indicated.

BOUNDARY CONDITIONS	$\underline{s}$	$\underline{\alpha}$
Nothing Inside	$+j$	0
Nothing Outside	$-j$	∞
$\sigma - \rightarrow \infty$	0	$+1$
$\mu - \rightarrow \infty$	∞	-1

TABLE A1.   SURFACE AND REFLECTION COEFFICIENTS

Referring to Figure 1, field equations for the machine may now be developed assuming no magnetic material inside the driving shaft and no material outside the shield. At this point in the analysis no particular value of the shield permeability will be specified but will carry as the variable μ_s. The air gap fields both inside and then outside of the field winding will now be developed followed by a development

69

of the fields within the field winding. The results are
then extended to the armature and compensator windings.

Based on the two dimensional schematic representation
of the machine in Figure 1 a harmonic expression for the field
current density may be developed. Figure A1 depicts $J_f(\theta)$ vs.
θ and is used as a basis for the following Fourier analysis.
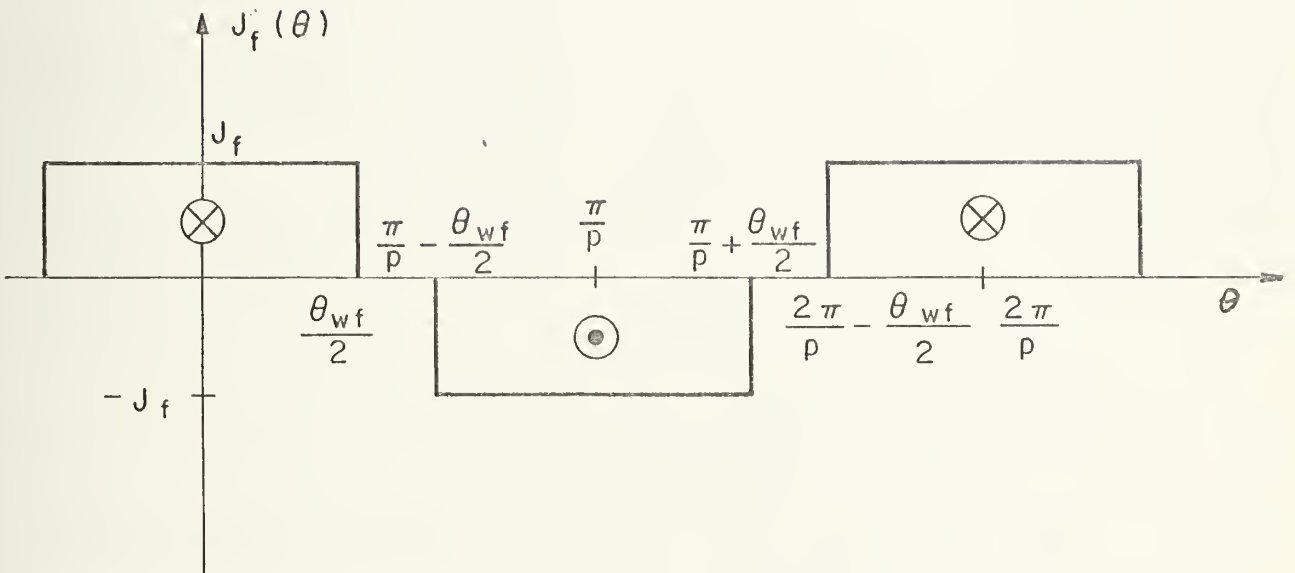
Figure A-I   Field Winding Angular Dependence of Current Density

70

$J_f(\theta)$ may be represented in a complete Fourier series as developed below:

$$J_f(\theta) = J_o + \sum_{n=1}^{\infty} (J_{fn}\cos\frac{2n\pi\theta}{p} + K_{fn}\sin\frac{2n\pi\theta}{p}) \qquad (A40)$$

where $\underline{p}$ is the period and equal to $\frac{2\pi}{p}$.

$$J_{fo} = \frac{1}{\underline{p}}\int_o^{\underline{p}} F(\theta)d\theta = \frac{p}{2\pi}\int_o^{\frac{2\pi}{p}} F(\theta)d\theta = 0 \qquad (A41)$$

$$J_{fn} = \frac{2}{\underline{p}}\int_o^{\underline{p}} F(\theta)\cos\frac{2n\pi\theta}{\underline{p}} d\theta = \frac{p}{\pi}\int_o^{\frac{2\pi}{p}} F(\theta)\cos np\theta d\theta \qquad (A42)$$

where $F(\theta) = J_f(\theta)$

$$J_{fn} = \frac{pJ_f}{\pi} \left[\int_o^{\frac{\theta wf}{2}}\cos n\,p\theta d\theta - \int_{\frac{\pi}{p}-\frac{\theta wf}{2}}^{\frac{\pi}{p}+\frac{\theta wf}{2}}\cos n\,p\theta d\theta + \int_{\frac{2\pi}{p}-\frac{\theta wf}{2}}^{\frac{2\pi}{p}} \cos n\,p\theta d\theta \right]$$

$$(A43)$$

Integrating A43 yields

$$J_{fn} = \frac{J_f}{n\pi} \left[\sin(\frac{np\theta wf}{2}) - \sin(n\pi + \frac{np\theta wf}{2}) + \sin(n\pi - \frac{np\theta wf}{2}) \right.$$

$$\left. - \sin(2n\pi - \frac{np\theta wf}{2}) \right] \qquad (A44)$$

Using a trigonometric identity it can be shown that

$$J_{fn} = \begin{cases} \dfrac{4J_f}{n\pi} \sin \dfrac{np\theta wf}{2} & n \text{ odd} \\ \\ o & n \text{ even} \end{cases} \qquad (A45)$$

We can show that

$$K_{fn} = \frac{2}{p} \int_o^{\frac{p}{}} F(\theta) \sin \frac{2n\pi\theta}{p} \, d\theta = 0 \qquad (A46)$$

If we allow J_f to be a function of both time and space, A40 becomes after substituting A41, A44 and A46

$$J_f(\theta,t) = \sum_{n=1}^{\infty} J_{fn} \cos(\omega t - np\theta) \qquad (A47)$$

where J_{fn} are described by equation A45.

The harmonic components of $J_f(\theta,t)$ may be written in a complex form as

$$J_{fn}(\theta,t) = \text{Re}[\underline{J}_{fn} \, e^{j(\omega t - np\theta)}] \qquad (A48)$$

Where $\underline{J}_{fn} = J_{fn} + j0$, n odd, J_{fn} defined in A45.

The effective field current density may be related to the terminal current as

$$J_f = \frac{N_{tf} I_f}{A_f} = \frac{2N_{tf} I_f}{\theta_{wf} (R_{fo}^2 - R_{fi}^2)}$$

Define

$$y \equiv \frac{R_{fi}}{R_{fo}}$$

$$J_f = \frac{2N_{tf} I_f}{\theta_{wf} (1-y^2) R_{fo}^2} \qquad (A49)$$

and J_{fn} becomes

$$J_{fn} = \begin{cases} \dfrac{8N_{tf} I_f}{n\pi\theta_{wf} (1-y^2) R_{fo}^2} \sin \dfrac{np\theta_{wf}}{2} & n \text{ odd} \\[4mm] 0 & n \text{ even} \end{cases} \qquad (A50)$$

Referring to Figure 1 and references 1 and 2, the field components, H_{rf} and $H_{r\theta}$, in each region of concern ($R_{ai} < r < R_{fi}$; $R_{fi} < r < R_{fo}$; $R_{fo} < r < R_{si}$) may now be derived. The field equations will be treated as complex expressions, and the detailed derivation of these expressions may be founded in reference 2.

Again referring to Figure 1 and reference 2, the field component in the radial direction inside the field winding is:
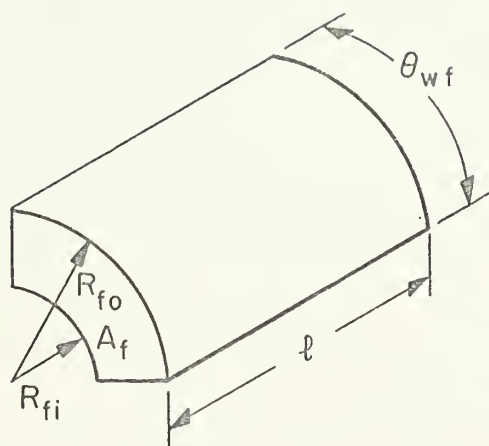
Figure A-2   Field Winding Pole Face

$$H_{rfi} = j \frac{J_{fn}}{2} \left(\frac{r^{k-1} - \alpha_{fi} R_{ai}^{2k} \cdot r^{-k-1}}{\alpha_{fo} R_{si}^{2k} - \alpha_{fi} R_{ai}^{2k}} \right) \cdot \left[\frac{R_{fo}^{2+k} - R_{fi}^{2+k}}{2+k} - \right.$$

$$\left. \frac{\alpha_{fo} R_{si}^{2k} (R_{fo}^{2-k} - R_{fi}^{2-k})}{2-k} \right] \tag{A51}$$

The separation constant initially introduced in equation A17 is now defined as

$$k = np \tag{A52}$$

It is assumed at this point in the analysis that the permeability of the shaft material approaches that of free space, therefore α_i now equals 0. This is done as a matter of problem simplification realizing that α_i could be carried throughout the analysis. A 51 becomes

$$H_{rfi} = j \frac{J_{fn}}{2} \left(\frac{r^{k-1}}{\alpha_{fo} R_{si}^{2k}} \right) \left[\frac{R_{fo}^{2+k} - R_{fi}^{2+k}}{2+k} - \right.$$

$$\left. \frac{\alpha_{fo} R_{si}^{2k} (R_{fo}^{2-k} - R_{fi}^{2-k})}{2-k} \right] \tag{A53}$$

In general,

$$H = \text{Re}[\underline{H}_e{}^{j(wt-k\theta)}] \tag{A54}$$

therefore

$$H_{rfi} = \text{Re}\left\{ j\frac{\underline{J}_{fn}}{2}\left(\frac{r^{k-1}}{\underline{\alpha}_{fo} R_{si}{}^{2k}}\right)\left[\frac{R_{fo}{}^{2+k}-R_{fi}{}^{2+k}}{2+k} - \right.\right.$$

$$\left.\left. \frac{\underline{\alpha}_{fo} R_{si}{}^{2k}(R_{fo}{}^{2-k}-R_{fi}{}^{2-k})}{2-k}\ e^{j(\omega t-k\theta)}\right]\right\} \tag{A55}$$

In order to simplify A55, define

$$\Omega = \frac{R_{fo}{}^{2+k}-R_{fi}{}^{2+k}}{2+k} - \frac{\underline{\alpha}_{fo} R_{si}{}^{2k}(R_{fo}{}^{2-k}-R_{fi}{}^{2-k})}{2-k} \tag{A56}$$

and A55 becomes

$$H_{rfi} = \text{Re}\left\{ j\frac{\underline{J}_{fn}}{2}\left(\frac{r^{k-1}}{\underline{\alpha}_{fo}R_{si}{}^{2k}}\right)\ \Omega_e{}^{j(wt-k\theta)}\right\} \tag{A57}$$

Substituting $\underline{J}_{fn} = J_{fn} + j0$ into A57 and reducing to the real part only H_{rfi} becomes

$$H_{rfi} = -\frac{J_{fn}}{2}\left(\frac{r^{k-1}}{\underline{\alpha}_{fo}R_{si}{}^{2k}}\right)\ \Omega\sin(\omega t-k\theta) \tag{A58}$$

76

Substituting A50 into A58,

$$H_{rfi} = -\frac{4N_{tf} I_f}{n\pi\theta_{wf}(1-y^2)R_{fo}^2} \left(\frac{r^{k-1}}{\alpha_{fo}R_{si}^{2k}}\right) \Omega\sin\frac{np\theta_{wf}}{2} \sin(wt-k\theta)$$

(A59)

A59 is an expression for only one harmonic component of H_{rfi}, and the total field must be represented as

$$H_{rfi} = -\sum_{\substack{n=1 \\ n \text{ odd}}}^{\infty} \frac{4N_{tf} I_f}{n\pi\theta_{wf}(1-y^2)R_{fo}^2} \left(\frac{r^{k-1}}{\alpha_{fo}R_{si}^{2k}}\right)$$

$$\Omega\sin\frac{k\theta_{wf}}{2} \sin(\omega t-k\theta)$$

(A60)

Relieving A60 of the requirement for time variation it becomes ($\omega = 2\pi f = 0$)

$$H_{rfi} = \sum_{\substack{n=1 \\ n \text{ odd}}}^{\infty} \frac{4N_{tf} I_f}{n\pi\theta_{wf}(1-y^2)R_{fo}^2} \left(\frac{r^{k-1}}{\alpha_{fo}R_{si}^{2k}}\right)$$

$$\Omega\sin\frac{k\theta_{wf}}{2} \sin k\,\theta$$

(A61)

Before proceeding with the field analysis an examination of α_o is in order. This derivation is patterned after that of reference 3 and utilizes Figure A-3.

At the outer boundry, R_{so}; $\underline{s}(R_{so}^+) = -j$, and at the outer surface;
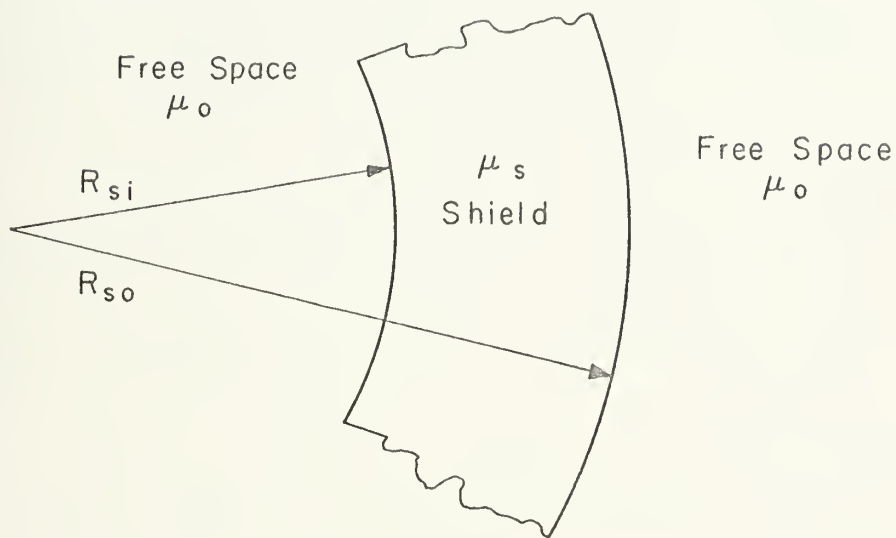
Figure A-3   Schematic of Machine Shield Showing Parameters used to derive $\underline{a_o}$.

Figure A-3   Schematic of Multiple Shield Shielding Problem used to derive a_2.

$$\underline{H}_{f\theta}(R_{so}^{-}) = \underline{H}_{f\theta}(R_{so}^{+})$$

$$\underline{H}_{fr}(R_{so}^{-}) = \frac{\mu_o}{\mu_s} \underline{H}_{fr}(R_{so}^{+})$$

Where R_{so}^{+} and R_{so}^{-} represent incremental positions adjacent to R_{so}. It may therefore show that

$$\underline{s}(R_{so}^{-}) = \frac{\underline{H}_{fr}(R_{so}^{-})}{\underline{H}_{f\theta}(R_{so_{-}})} = \frac{\frac{\mu_o}{\mu_s}\underline{H}_{fr}(R_{so}^{+})}{H_{f\theta}(R_{so}^{+})}$$

$$\underline{s}(R_{so}^{-}) = \frac{\mu_o}{\mu_s}\ \underline{s}(R_{so}^{+})$$

and $\quad \underline{s}(R_{so}^{-}) = -j\ \dfrac{\mu_o}{\mu_s}$ \hfill (A62)

To transfer $\underline{s}(R)$ across a radial increment use the equation A63 below[2]

$$\underline{s}(r) = j\ [\frac{r^{k-1}-\underline{\alpha}R^{2k}r^{-k-1}}{r^{k-1}+\underline{\alpha}R^{2k}r^{-k-1}}] \hfill \text{(A63)}$$

Substituting A58 into A63 and simplifying yields

$$\underline{s}(r) = j\ \left[\frac{1-(\frac{R}{r})^{2k}-j\underline{s}(R)\,[1+(\frac{R}{r})^{2k}]}{1+(\frac{R}{r})^{2k}-j\underline{s}(R)\,[1-(\frac{R}{r})^{2k}]}\right] \hfill \text{(A64)}$$

At the inner surface $(r = R_{si}^{-})$ of the shield, the boundary conditions require

$$\underline{s}(R_{si}^{-}) = \frac{\mu_s}{\mu_o} \, \underline{s}(R_{si}^{+}) \tag{A65}$$

Equation A64 is used to transfer the known boundary condition at $r = R_{so}^{-}$ (equation A62) across to R_{si}^{+}. Using equation A65 the desired boundary condition at $r = R_{si}^{-}$ may be found as

$$\underline{s}(R_{si}^{-}) = -j \, \frac{\mu_s}{\mu_o} \left\{ \frac{1-(\frac{R_{si}}{R_{so}})^{2k} + \frac{\mu_o}{\mu_s} \, [1+(\frac{R_{si}}{R_{so}})^{2k}]}{1+(\frac{R_{si}}{R_{so}})^{2k} + \frac{\mu_o}{\mu_s} \, [1-(\frac{R_{si}}{R_{so}})^{2k}]} \right\} \tag{A66}$$

Because $\underline{s}(R_{si}^{-}) = \underline{s}_{fo}(R_{si})$, using equation A38 it can be shown that

$$\underline{\alpha}_{fo} = [\frac{1 + j \, \underline{s}_{fo}(R_{si})}{1 - j \, \underline{s}_{fo}(R_{si})}] \tag{A67}$$

A general expression for $\underline{\alpha}_{fo}$ can be developed by substituting A66 into A67:

$$\underline{\alpha_{fo}} = \alpha_{fo} = \cfrac{1+\cfrac{\mu_s}{\mu_o}\cfrac{\left[1-(\cfrac{R_{si}}{R_{so}})^{2k}+\cfrac{\mu_o}{\mu_s}[1+(\cfrac{R_{si}}{R_{so}})^{2k}]\right]}{\left[1+(\cfrac{R_{si}}{R_{so}})^{2k}+\cfrac{\mu_o}{\mu_s}[1+(\cfrac{R_{si}}{R_{so}})^{2k}]\right]}}{1-\cfrac{\mu_s}{\mu_o}\cfrac{\left[1-(\cfrac{R_{si}}{R_{so}})^{2k}+\cfrac{\mu_o}{\mu_s}[1+(\cfrac{R_{si}}{R_{so}})^{2k}]\right]}{\left[1+(\cfrac{R_{si}}{R_{so}})^{2k}+\cfrac{\mu_o}{\mu_s}[1+(\cfrac{R_{si}}{R_{so}})^{2k}]\right]}} \qquad (A68)$$

Note that $\underline{\alpha_{fo}}$ is real, and in future analysis the com-
plex notation will be dropped. Also note that for all
windings α_o is equivalent and the first subscript may be
dropped.

In summary, the magnetic field density for the three
particular regimes of interest may be written as:

$r < R_{fi}$; $k = np$ not constrained; the most generalized

form:

$$H_{rfi} = \sum_{\substack{n=1 \\ n\text{ odd}}}^{\infty} \frac{4N_{tf} I_f}{n\pi(1-y^2)\theta_{wf}R_{fo}^2} (\frac{r^{k-1}}{\alpha_o R_{si}^{2k}}) \Omega\sin k\theta\sin\frac{k\theta_{wf}}{2}$$

$$(A61)$$

$$\Omega = \frac{R_{fo}^{2+k}-R_{fi}^{2+k}}{2+k} - \frac{\alpha_o R_{si}^{2k}}{2-k}(R_{fo}^{2-k} - R_{fi}^{2-k}) \qquad (A56)$$

81

α_o defined by equation A68.

r < R_{fi}; k = 2, n = 1, p = 2
___

$$H_{rfi} = \frac{4N_{tf}\,I_f}{\pi(1-y^2)\theta_{wf}R_{fo}^2}\,(\frac{r}{\alpha_o R_{si}^4})\,(\Omega)\,\sin 2\,\theta\,\sin\theta_{wf} \quad \text{(A69)}$$

$$\Omega = \frac{R_{fo}^4 - R_{fi}^4}{4} - \alpha_o\,R_{si}^4\,\ln(\frac{R_{fo}}{R_{fi}}) \quad \text{(A70)}$$

$$\alpha_o = \frac{1 + \dfrac{\mu_s}{\mu_o}\left\{\dfrac{1 - (\dfrac{R_{si}}{R_{so}})^4 + \dfrac{\mu_o}{\mu_s}[1 + (\dfrac{R_{si}}{R_{so}})^4]}{1 + (\dfrac{R_{si}}{R_{so}})^4 + \dfrac{\mu_o}{\mu_s}[1 + (\dfrac{R_{si}}{R_{so}})^4]}\right\}}{1 - \dfrac{\mu_s}{\mu_o}\left\{\dfrac{1 - (\dfrac{R_{si}}{R_{so}})^4 + \dfrac{\mu_o}{\mu_s}[1 + (\dfrac{R_{si}}{R_{so}})^4]}{1 + (\dfrac{R_{si}}{R_{so}})^4 + \dfrac{\mu_o}{\mu_s}[1 + (\dfrac{R_{si}}{R_{so}})^4]}\right\}} \quad \text{(A71)}$$

allowing μ_s to approach ∞ reduces A68 to

$$\alpha_o = -1$$

r < R_{fi}; $\mu_s \to \infty$; k not constrained
___

$$H_{rfi} = -\sum_{\substack{n=1 \\ n\ \text{odd}}}^{\infty} \frac{4N_{tf}\,I_f}{\theta_{wf}n\pi(1-y^2)R_{fo}^2}\,(\frac{r^{k-1}}{R_{si}^{2k}})\,\Omega\,\sin k\,\theta\,\sin\frac{k\theta_{wf}}{2}$$

$$\text{(A72)}$$

82

$$\Omega = \frac{R_{fo}^{2+k} - R_{fi}^{2+k}}{2+k} + \frac{R_{si}^{2k}}{2-k} (R_{fo}^{2-k} - R_{fi}^{2-k}) \qquad (A73)$$

$r < R_{fi}; \; \mu_s \to \infty; \; k = 2, \; n = 1, \; p = 2$

$\alpha_o = -1$

$$H_{rfi} = -\frac{4N_{tf} I_f}{\theta_{wf} \pi (1-y^2) R_{fo}^2} \left(\frac{r}{R_{si}^4}\right) \Omega \sin \theta_{wf} \sin 2\theta \qquad (A74)$$

$$\Omega = \frac{R_{fo}^4 - R_{fi}^4}{4} + R_{si}^4 \ln\left(\frac{R_{fo}}{R_{fi}}\right) \qquad (A75)$$

Again, using results from reference 2 the azimuthal component of magnetic field density may be found as

$$H_{\theta fi} = \frac{J_{fn}}{2} \left[\frac{r^{k-1} + \alpha_{fi} R_{ai}^{2k} r^{-k-1}}{\alpha_o R_{si}^{2k} - \alpha_{fi} R_{ai}^{2k}}\right] \cdot \left[\frac{R_{fo}^{2+k} - R_{fi}^{2+k}}{2+k}\right.$$

$$\left. - \alpha_o \frac{R_{si}^{2k} (R_{fo}^{2-k} - R_{fi}^{2-k})}{2-k}\right] \qquad (A76)$$

again $\alpha_{fi} = 0$, and taking real part of A76 yields:

$$H_{\theta fi} = \frac{J_{fn}}{2} \left(\frac{r^{k-1}}{\alpha_o R_{si}^{2k}}\right) \Omega \cos(\omega t - k\theta) \qquad (A77)$$

Using A45 and realizing $\omega = 0$ it can be shown that

$$H_{\theta fi} = \frac{2J_f}{n\pi} \left(\frac{r^{k-1}}{\alpha_o R_{si}^{2k}}\right) \Omega \cos k\theta \sin \frac{k\theta_{wf}}{2} \qquad (A78)$$

83

Ω defined by equation A56 and α_o by A68

r < R_{fi}; k = 2, n = 1, p = 2; μ_s not constrained

α_o defined by equation A71 and Ω by A70

$$H_{\theta fi} = \frac{2J_f}{\pi} \left(\frac{r}{\alpha_o R_{si}^4}\right) \Omega \cos 2\theta \sin \theta_{wf} \qquad (A79)$$

r < R_{fi}; $\mu_s \to \infty$; k not constrained

α_o = -1; Ω defined by equation A56

$$H_{\theta fi} = -\sum_{\substack{n=1 \\ n \text{ odd}}}^{\infty} \frac{2J_f}{n\pi} \left(\frac{r^{k-1}}{R_{si}^{2k}}\right) \Omega \cos k\theta \sin \frac{k\theta_{wf}}{2} \qquad (A80)$$

r < R_{fi}; $\mu_s \to \infty$; k = 2, n = 1, p = 2

α_{fo} = -1; Ω defined by equation A70

$$H_{\theta fi} = \frac{-2J_f}{\pi} \left(\frac{r}{R_{si}^4}\right) \Omega \cos 2\theta \sin \theta_{wf} \qquad (A81)$$

The fields generated by currents in the field winding in the region R_{fo} < r < R_{si} will now be examined. From reference 2

$$H_{rfo} = j \frac{J_{fn}}{2} \left[\frac{r^{k-1} - \alpha_o R_{si}^{2k} r^{-k-1}}{\alpha_o R_{si}^{2k} - \alpha_{fi} R_{ai}^{2k}} \right] \left[\frac{R_{fo}^{2+k} - R_{fi}^{2+k}}{2+k} - \alpha_{fi} R_{ai}^{2k} \right.$$

$$\left. \frac{(R_{fo}^{2-k} - R_{fi}^{2-k})}{2-k} \right] \tag{A82}$$

Assuming nothing inside the driving shaft and $\alpha_{fi} = 0$, taking the real part of A54 and considering all harmonics yields

$$H_{rfo} = + \sum_{\substack{n=1 \\ n \text{ odd}}}^{\infty} \frac{J_f}{n\pi} \left[\frac{r^{k-1} - \alpha_o R_{si}^{2k} r^{-k-1}}{\alpha_o R_{si}^{2k}} \right] \left(\frac{R_{fo}^{2+k} - R_{fi}^{2+k}}{2+k} \right)$$

$$\sin k\theta \sin \frac{k\theta_{wf}}{2} \tag{A83}$$

α_o defined by equation A68.

$\underline{R_{fo} < r < R_{si};\ k=2,\ n=1,\ p=2;\ \mu_s \text{ not constrained}}$

$$H_{rfo} = -\frac{2J_f}{n\pi} \left(\frac{r - \alpha_o R_{si}^4 r^{-3}}{\alpha_o R_{si}^4} \right) \left(\frac{R_{fo}^4 - R_{fi}^4}{4} \right) \sin \theta_{wf} \sin 2\theta \tag{A84}$$

α_o defined by equation A71

85

$\underline{R_{fo} < r < R_{si}; \text{ k not constrained}; \mu_s \to \infty}$

$$H_{rfo} = + \sum_{\substack{n=1 \\ n \text{ odd}}}^{\infty} \frac{2J_f}{n\pi} \left(\frac{r^{k-1}+R_{si}^{2k}r^{-k-1}}{R_{si}^{2k}}\right) \left(\frac{R_{fo}^{2+k}-R_{fi}^{2+k}}{2+k}\right)$$

$$\sin k\,\theta \sin \frac{k\theta_{wf}}{2} \qquad (A85)$$

$\alpha_o = -1$

$\underline{R_{fo} < r < R_{si}; \text{ k = 2, n = 1, p = 2}; \mu_s \to \infty}$

$$H_{rfo} = +\frac{2J_f}{n\pi} \left(\frac{r + R_{si}^{4}r^{-3}}{R_{si}^{4}}\right) \left(\frac{R_{fo}^{4}-R_{fi}^{4}}{4}\right) \sin 2\theta \sin\theta_{wf}$$

$$\qquad (A86)$$

$\alpha_o = -1$

The azimuthal component of the field outside the field winding is now found from reference 2:

$$H_{\theta fo} = \frac{J_{fn}}{2} \left(\frac{r^{k-1}+\alpha_o R_{si}^{2k}r^{-k-1}}{\alpha_o R_{si}^{2k}-\underline{\alpha_{fi}}R_{ai}^{2k}}\right) \left[\frac{R_{fo}^{2+k}-R_{fi}^{2+k}}{2+k}\right.$$

$$\left. -\underline{\alpha_{fi}} \frac{R_{ai}^{2k}(R_{fo}^{2-k}-R_{fi}^{2-k})}{2-k}\right] \qquad (A87)$$

86

$\underline{\alpha_{fi}} = 0$, taking the real part of A54, and considering all harmonics yields:

$$H_{\theta fo} = \sum_{\substack{n=1 \\ n \text{ odd}}}^{\infty} \frac{2J_f}{n\pi} \left(\frac{r^{k-1} + \alpha_o R_{si}^{2k} r^{-k-1}}{\alpha_o R_{si}^{2k}}\right) \left(\frac{R_{fo}^{2+k} - R_{fi}^{2+k}}{2+k}\right)$$

$$\sin \frac{k\theta_{wf}}{2} \cos k\theta \qquad \text{(A88)}$$

α_o defined by equation A68

$\underline{R_{fo} < r < R_{si}; \ k=2, \ n=1, \ p=2, \ \mu_s \text{ not constrained}}$

$$H_{\theta fo} = \frac{2J_f}{\pi} \left(\frac{r + \alpha_o R_{si}^4 r^{-3}}{\alpha_o R_{si}^4}\right) \left(\frac{R_{fo}^4 - R_{fi}^4}{4}\right) \cos 2\theta \sin \theta_{wf}$$

$$\text{(A89)}$$

α_o defined by equation A71

$\underline{R_{fo} < r < R_{si}; \ k \text{ not constrained}, \ \mu_s \to \infty}$

$\alpha_o = -1$

$$H_{\theta fo} = - \sum_{\substack{n=1 \\ n \text{ odd}}}^{\infty} \frac{2J_f}{n\pi} \left(\frac{r^{k-1} - R_{si}^{2k} r^{-k-1}}{R_{si}^{2k}}\right) \left(\frac{R_{fo}^{2+k} - R_{fi}^{2+k}}{2+k}\right)$$

$$\cos k\theta \sin \frac{k\theta_{wf}}{2} \qquad \text{(A90)}$$

$$\underline{R_{fo} < r < R_{si}; \quad k=2, \quad n=1, \quad p=2; \quad \mu_s \to \infty}$$

$$\alpha_o = -1$$

$$H_{\theta fo} = -\frac{2J_f}{n\pi}\left(\frac{r - R_{si}^{4}r^{-3}}{R_{si}^{4}}\right)\left(\frac{R_{fo}^{4} - R_{fi}^{4}}{4}\right) \cos 2\theta \sin \theta_{wf}$$

(A91)

The field expressions within the field winding are now developed. $(R_{fi} < r < R_{fo})$. From reference 2:

$$\underline{H_{rf}} = j\frac{J_{fn}}{2}\left(\frac{r^{k-1} - \alpha_o R_{si}^{2k}r^{-k-1}}{\alpha_o R_{si}^{2k} - \underline{\alpha_{fi}}R_{ai}^{2k}}\right)\left[\frac{r^{k+2} - R_{fi}^{2+k}}{2+k} - \underline{\alpha_{fi}}R_{ai}^{2k}\right.$$

$$\left.\frac{(r^{2-k} - R_{fi}^{2-k})}{2-k}\right] + j\frac{J_{fn}}{2}\left(\frac{r^{k-1} - \underline{\alpha_{fi}}R_{ai}^{2k}r^{-k-1}}{\alpha_o R_{si}^{2k} - \underline{\alpha_{fi}}R_{ai}^{2k}}\right)$$

$$\left[\frac{R_{fo}^{2+k} - r^{2+k}}{2+k} - \frac{\alpha_o R_{si}^{2k}(R_{fo}^{2-k} - r^{2-k})}{2-k}\right]$$

(A92)

$\underline{\alpha_{fi}} = 0$, taking real part of A54 and considering all harmonics yields:

$$H_{rf} = \sum_{\substack{n=1 \\ n \text{ odd}}}^{\infty} \frac{2J_f}{n}\left\{\left(\frac{r^{k-1} - \alpha_o R_{si}^{2k}r^{-k-1}}{\alpha_o R_{si}^{2k}}\right)\left(\frac{r^{2+k} - R_{fi}^{2+k}}{2+k}\right)\right.$$

$$\left.+ \left(\frac{r^{k-1}}{\alpha_o R_{si}^{2k}}\right)\left[\frac{R_{fo}^{2+k} - r^{2+k}}{2+k} - \frac{\alpha_o R_{si}^{2k}(R_{fo}^{2-k} - R_{fi}^{2-k})}{2-k}\right]\right\}$$

$$\sin\frac{k\theta_{wf}}{2} \sin k\theta$$

(A93)

88

α_o defined by equation A68

$R_{fi} < r < k_{fo}$; $R=2$, $n=1$, $p=2$; μ_s not constrained

$$H_{rf} = \frac{2J_f}{n\pi} \left[\left(\frac{r - \alpha_o R_{si}{}^4 r^{-3}}{\alpha_o R_{si}{}^4} \right) \left(\frac{r^4 - R_{fi}{}^4}{4} \right) + \left(\frac{r}{\alpha_o R_{si}{}^4} \right) \right.$$

$$\left. \left(\frac{R_{fo}{}^4 - r^4}{4} - \alpha_o R_{si}{}^4 \ln \frac{R_{fo}}{r} \right) \right] \sin \theta_{wf} \sin 2\theta \qquad \text{(A94)}$$

α_o defined by equation A71

$R_{fi} < r < R_{fo}$; $\mu_s \rightarrow \infty$; k not constrained

$$H_{rf} = - \sum_{\substack{n=1 \\ n \text{ odd}}}^{\infty} \frac{2J_f}{n\pi} \left\{ \left(\frac{r^{k-1} + R_{si}{}^{2k} r^{-k-1}}{R_{si}{}^{2k}} \right) \left(\frac{r^{2+k} - R_{fi}{}^{2+k}}{2+k} \right) \right.$$

$$\left. + \left(\frac{r^{k-1}}{R_{si}{}^{2k}} \right) \left[\frac{R_{fo}{}^{2+k} - r^{2+k}}{2+k} + \frac{R_{si}{}^{2k} (R_{fo}{}^{2-k} + r^{2-k})}{2-k} \right] \right\}$$

$$\sin \frac{k\theta_{wf}}{2} \sin k\theta \qquad \text{(A95)}$$

$\underline{R_{fi} < r < R_{fo}; \quad k=2, \quad n=1, \quad p=2; \quad \mu_s \to \infty}$

$$H_{rf} = -\frac{2J_f}{n\pi} \left[\left(\frac{r+R_{si}^{4} r^{-3}}{R_{si}^{4}}\right)\left(\frac{r^4-R_{fi}^{4}}{4}\right) + \left(\frac{r}{R_{si}^{4}}\right)\left(\frac{R_{fo}^{4}-r^4}{4}\right) \right.$$

$$\left. + R_{si}^{4}\ln\frac{R_{fo}}{r}\right) \right] \sin\theta_{wf} \sin 2\theta \tag{A96}$$

Again, from reference 2:

$$H_{\theta f} = \frac{J_{fn}}{2}\left(\frac{r^{k-1}+\alpha_{fi}R_{si}^{2k}r^{-k-1}}{\alpha_o R_{si}^{2k}-\alpha_{fi}R_{ai}^{2k}}\right)\left(\frac{r^{2+k}-R_{fi}^{2+k}}{2+k}\right.$$

$$- \alpha_{fi}\frac{R_{ai}^{2k}(r^{2-k}-R_{fi}^{2-k})}{2-k}\right) + \frac{J_{fn}}{2}\left(\frac{r^{k-1}+\alpha_{fi}R_{ai}^{2k}r^{-k-1}}{\alpha_o R_{si}^{2k}-\alpha_{fi}R_{ai}^{2k}}\right)$$

$$\left[\frac{R_{fo}^{2+k}-r^{2+k}}{2+k} - \alpha_o R_{si}^{2k}\frac{(R_{fo}^{2-k}-r^{2-k})}{2-k}\right] \tag{A97}$$

$\underline{\alpha_{fi}} = 0$, taking real part of A54, and considering all harmonics yields:

$$H_{\theta f} = \sum_{\substack{n=1 \\ n\ odd}}^{\infty} \frac{2J_f}{n\pi}\left\{\left(\frac{r^{k-1}}{\alpha_o R_{si}^{2k}}\right)\left(\frac{r^{2+k}-R_{fi}^{2+k}}{2+k}\right) + \left(\frac{r^{2-k}}{\alpha_o R_{si}^{2k}}\right)\right.$$

$$\left.\left[\frac{R_{fo}^{2+k}-r^{2+k}}{2+k} - \alpha_o\frac{R_{si}^{2k}(R_{fo}^{2-k}-r^{2-k})}{2-k}\right]\right\}$$

$$\sin\frac{k\theta_{wf}}{2}\cos k\theta \tag{A98}$$

α_o defined by equation A68.

$R_{fi} < r < R_{fo}$; $R=2$, $n=1$, $p=2$; μ_s not constrained

$$H_{\theta f} = \frac{2J_f}{\pi} \left[\left(\frac{r}{\alpha_o R_{si}^{\ 4}}\right) \left(\frac{r^4 - R_{fi}^{\ 4}}{4}\right) + \left(\frac{1}{\alpha_o R_{si}^{\ 4}}\right) \left(\frac{R_{fo}^{\ 4} - r^4}{4}\right) \right. $$

$$\left. - \alpha_o R_{si}^{\ 4} \ln \frac{R_{fo}}{r} \right) \sin \theta_{wf} \cos 2\theta \qquad (A99)$$

α_o defined by equation A71.

$R_{fi} < r < R_{fo}$; R not constrained, $\mu_s \to \infty$

$$H_{\theta f} = - \sum_{\substack{n=1 \\ n \text{ odd}}}^{\infty} \frac{2J_f}{n\pi} \left\{ \left(\frac{r^{k-1}}{R_{si}^{\ 2k}}\right) \left(\frac{r^{2+k} - R_{fi}^{\ 2+k}}{2+k}\right) + \left(\frac{r^{2-k}}{R_{si}^{\ 2k}}\right) \right.$$

$$\left. \left[\frac{R_{fo}^{\ 2+k} - r^{2+k}}{2+k} + \frac{R_{si}^{\ 2k}(R_{fo}^{\ 2-k} - r^{2-k})}{2-k}\right] \right\}$$

$$\sin \frac{k\theta_{wf}}{2} \cos k\theta \qquad (A100)$$

91

$$R_{fi} < r < R_{fo}; \quad k=2, \quad n=1, \quad p=2; \quad \mu_s \to \infty$$

$$H_{\theta f} = -\frac{2J_f}{\pi} \left[\left(\frac{r}{R_{si}^4}\right) \left(\frac{r^4 - R_{fi}^4}{4}\right) + \left(\frac{1}{R_{si}^4}\right) \left(\frac{R_{fo}^4 - r^4}{4} + R_{si}^4 \ln\frac{R_{fo}}{r}\right) \right]$$

$$\sin \theta_{wf} \sin 2\theta \qquad\qquad (A101)$$

Referring to Figure 1, the field equations as developed above are valid for the fields generated by the current in the compensator if we replace θ with $\theta - \alpha$. α is defined as the angle between the direct axis field component of the field winding and the direct axis field component of the compensator winding. We may also find the field expressions for the armature by making the appropriate substitutions as outlined in Table A3.

Substitute term in column B for column C to find fields due
to currents in column A.

A	B	C
Compensator	θ_{wc}	θ_{wf}
	J_c	J_f
	N_{tc}	N_{tf}
	I_c	I_f
	R_{ci}	R_{fi}
	R_{co}	R_{fo}
	z	y
	$\theta - \alpha$	θ
Phase A or Armature	$\theta + \phi$	θ
	θ_{wa}	θ_{wf}
	J_a	J_f
	N_{ta}	N_{tf}
	I_a	I_f
	R_{ai}	R_{fi}
	R_{ao}	R_{fo}
	x	y
Phase B of Armature	$\theta + \phi + \dfrac{2\pi}{3}$	θ
Phase C of Armature	$\theta + \phi + \dfrac{4\pi}{3}$	θ

TABLE A2. Substitutions for Field Expressions

APPENDIX B

MACHINE INDUCTANCES

The flux-current relationships for the machine may be
expressed in a matrix format as

$$
\begin{vmatrix} \lambda_1 \\ \lambda_2 \\ \lambda_3 \\ \lambda_c \\ \lambda_f \end{vmatrix} = \begin{vmatrix} L_1 & L_{12} & L_{13} & M_{1c} & M_{1f} \\ L_{12} & L_2 & L_{23} & M_{2c} & M_{2f} \\ L_{13} & L_{23} & L_3 & M_{3c} & M_{3f} \\ M_{1c} & M_{2c} & M_{3c} & L_c & M_{cf} \\ M_{1f} & M_{2f} & M_{3f} & M_{fc} & L_f \end{vmatrix} \cdot \begin{vmatrix} I_1 \\ I_2 \\ I_3 \\ I_c \\ I_f \end{vmatrix}
$$

In the above expression, for clarification a, b, and c
(armature phase subscripts) have been replaced with 1, 2, and
3 respectfully.

In general, the self-inductance of the field may be
found as

$$
L_f = \frac{\lambda_f}{I_f} \bigg|_{I_1 = I_2 = I_3 = I_c = 0}
$$

Referring to Figure B1 the flux linkage may be interpreted
as that flux, Φ passing through the coil. More exactly

$$
\lambda = N_t \Phi \tag{B1}
$$
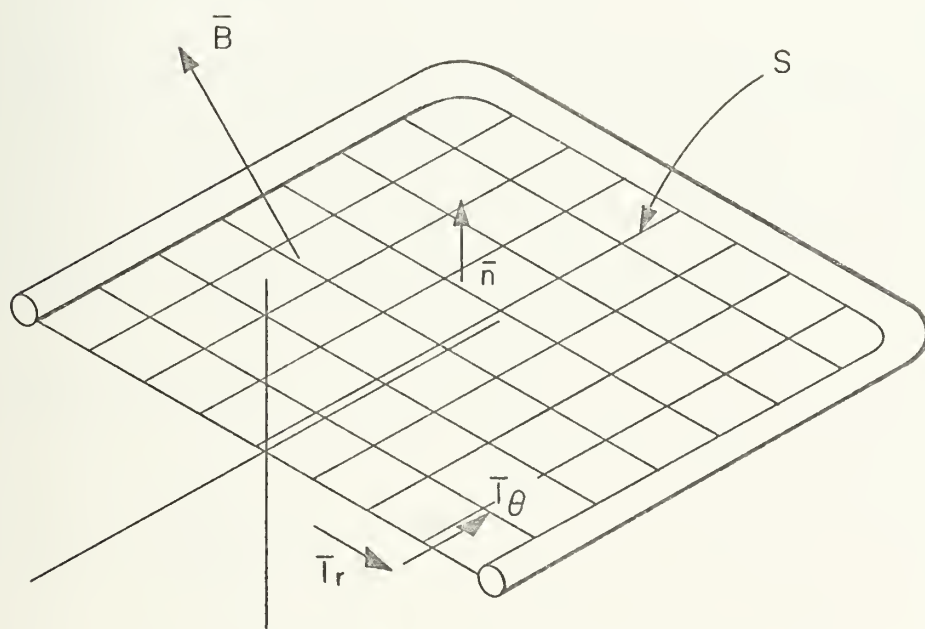
Figure B-1   Single Turn Coil Flux Linkage

where for a single turn coil $N_t=1$ and

$$\Phi = \int_s \bar{B} \cdot \bar{n} \, da \qquad (B2)$$

equation B1 becomes

$$\lambda = N_t \int_s \bar{B} \cdot \bar{n} \, da \qquad (B3)$$

By referring to Figure B-2 this concept may be extended to determine the flux linked by a thick winding composed of many turns. The differential number of turns in the differential element $rd\psi dr$ may be expressed as

$$d^2N_t = \frac{N_t}{A} \, dA \qquad (B4)$$

$$d^2N_t = \frac{2N_t}{\theta_w(R_{wo}^2 - R_{wi}^2)} \, dA \qquad (B5)$$

where $dA = rdrd\psi$

The flux linked by this element is given by

$$d^2\lambda = \Phi d^2N_t \qquad (B6)$$

$$d^2\lambda = \frac{2N_t \Phi}{\theta_w(R_{wo}^2 - R_{wi}^2)} \, dA \qquad (B7)$$

where Φ is expressed in equation B2. If we are determining the self-inductance of the winding, Φ is generated by currents flowing in the winding in question. Otherwise (mutual) Φ is

96
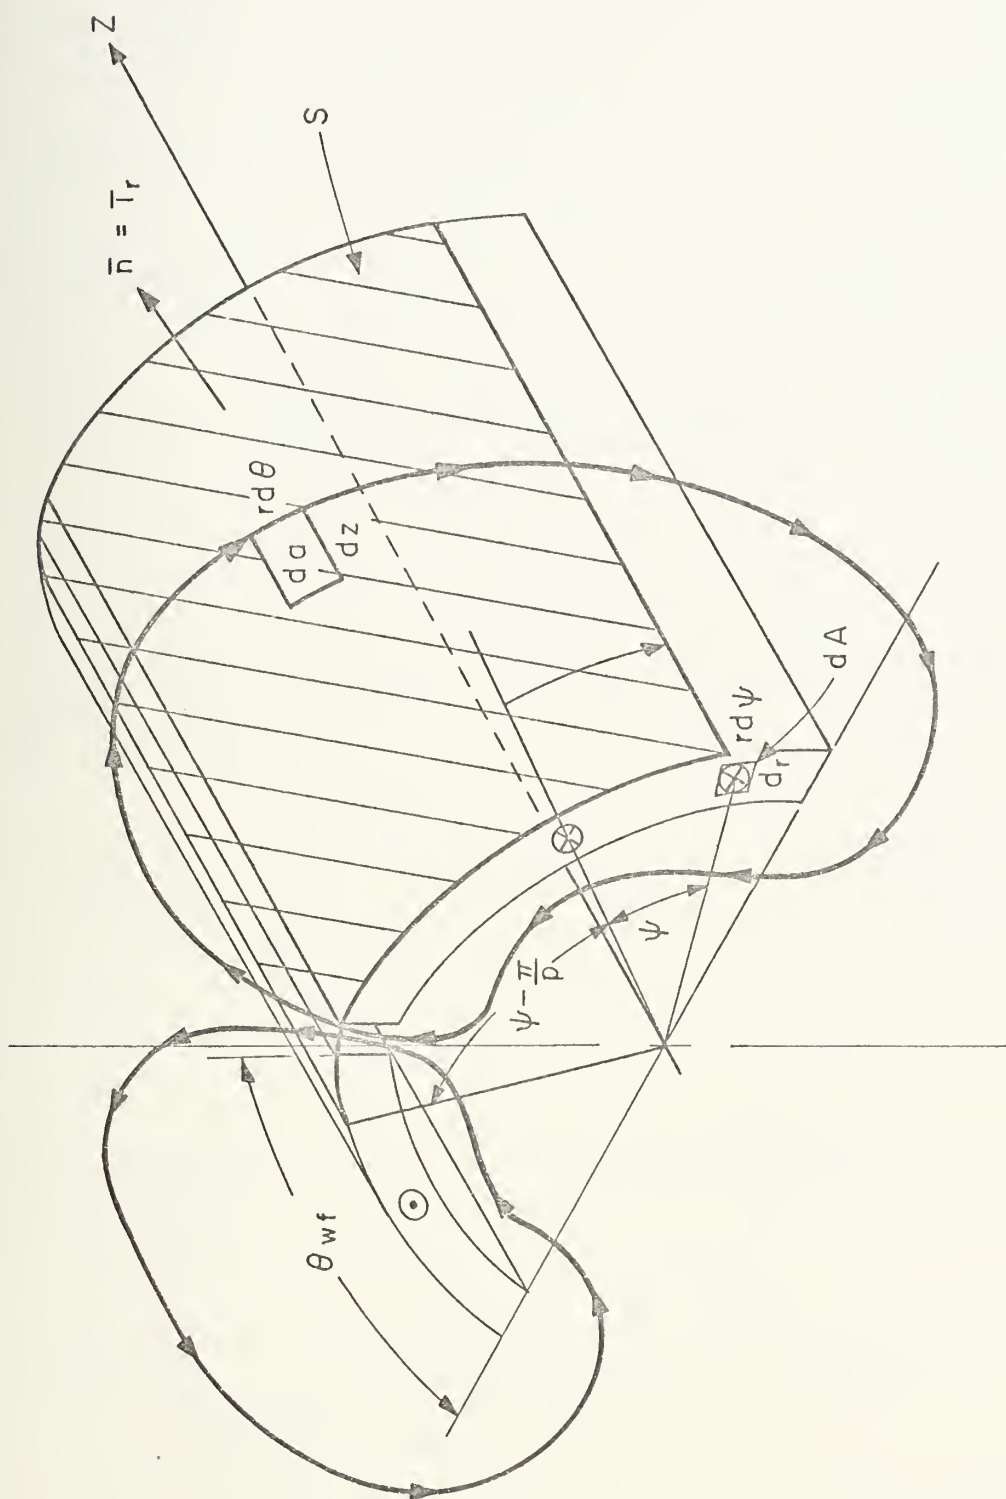
Figure B-2   Flux Linkage of Differential Elements

generated by some other current within the machine. Within

the air-gap we assume the fields are conservative and may

express $\bar{B}$ as:

$$\bar{B} = \mu_0 \bar{H} \tag{B8}$$

and, B7 becomes

$$d^2\lambda = [\int_s \mu_0 \bar{H} \cdot \bar{n} \, da] \, d^2 N_t = [\int_s \mu_0 \bar{H} \cdot \bar{n} \, da] \frac{2 N_t dA}{\theta_w (R_{so}^2 - R_{wi}^2)}$$

$$\tag{B7}$$

Treating the field winding self inductance, equation B7

may be written as

$$L_f = \frac{P}{I_f} \int_{-\frac{\theta_{wf}}{2}}^{\frac{\theta_{wf}}{2}} \int_{R_{fi}}^{R_{fo}} [\int_{\psi-\frac{\pi}{p}}^{\psi} \mu_0 H_{rf}(r,\theta) r d\theta dz] \frac{2 N_{tf} \cdot r dr d\psi}{\theta_{wf}(R_{fo}^2 - R_{fi}^2)}$$

$$\tag{B7}$$

Using equation A93 we may integrate B7 and obtain the field

self inductance:

$$L_f = \sum_{\substack{n=1 \\ n \text{ odd}}}^{\infty} \frac{16 \sin^2 (\frac{k\theta_{wf}}{2}) N_{tf}^2 \ell f^{\mu}_o}{\alpha_o n^3 p \pi \theta_{wf}^2 (k^2-4)(1-y^2)^2} \left\{ 2(\frac{2-k}{2+k})(1-y^{2+k})^2 (\frac{R_{fo}}{R_{si}})^{2k} \right.$$

$$\left. + \alpha_o [(k-2) + 4y^{2+k} - y^4 (2+k)] \right\} \tag{B9}$$

98

when α_o is given by equation A68.

Let $\mu_s \to \infty$, k not constrained
_____

$\alpha_o = -1$

$$L_f = \sum_{\substack{n=1 \\ n\ \text{odd}}}^{\infty} \frac{16\ \sin^2(\frac{k\theta_{wf}}{2}) N_{tf}^2 \ell_f \mu_o}{n^3 p\pi \theta_{wf}^2 (k^2-4)(1-y^2)^2} [2(\frac{k-2}{k+2})(1-y^{2+k})^2$$

$$(\frac{R_{fo}}{R_{si}})^{2k} + (k-2) + 4y^{2+k} - y^4(2+k)] \qquad (B10)$$

This result agrees with the tabulated value for L_f in reference 6, and can be obtained directly from equation 60 of reference 2.

k=2, n=1, p=2, μ_s not constrained
_____

$$L_f = \frac{8\ \sin^2(\theta_{wf}) N_{tf}^2 \ell_f \mu_o}{\alpha_o \pi \theta_{wf}^2 (1-y^2)^2} \left[-\frac{(1-y^4)^2}{8} (\frac{R_{fo}}{R_{si}})^4 \right.$$

$$\left. + \alpha_o [y^4 \ln y + \frac{1-y^4}{4} + \frac{(1-y^4)^2}{8} (\frac{R_{fo}}{R_{si}})^4] \right] \qquad (B11)$$

α_o defined by equation A71

99

$$k=2, \quad n=1, \quad p=2, \quad \mu_s \rightarrow \infty \qquad \alpha_o = -1$$

$$L_f = \frac{8\sin^2(\theta_{wf})N_{tf}^2 \ell_f \mu_o}{\pi\theta_{wf}^2(1-y^2)^2} \; [\frac{(1-y^4)^2}{8} \; (\frac{R_{fo}}{R_{si}})^4 + y^4 \ln y + \frac{1-y^4}{4}]$$

(B12)

Using the same technique discussed above, we may find all machine self and mutual inductances, allowing for the angles between ranous windings when developing the expressions for mutual inductances. The results of this analysis are listed in Table B-1.

TABLE B-1

MACHINE INDUCTANCES

See Appendix B for expressions for L_f.

$k = np$ not constrained, μ_s not constrained
_____

$$L_a = \sum_{\substack{n=1 \\ n \text{ odd}}}^{\infty} \frac{16\sin^2(\frac{k\theta_{wa}}{2})N_{ta}^2 \ell_a \mu_o}{\alpha_o n^3 p \; \theta_{wa}^2 (k^2-4)(1-x^2)^2} \left\{ 2(\frac{2-k}{k+2})(1-x^{2+k})^2 \right.$$

$$\left. (\frac{R_{ao}}{R_{si}})^{2k} + \alpha_o[(k-2)+4x^{2+k}-x^4(2+k)] \right\} \qquad (B13)$$

α_o given by equation A68

$k = np$ not constrained, $\mu_s \to \infty$
_____

$$L_a = \sum_{\substack{n=1 \\ n \text{ odd}}}^{\infty} \frac{16\sin^2(\frac{k\theta_{wa}}{2})N_{ta}^2 \ell_a \mu_o}{n^3 p \pi \theta_{wa}^2 (k^2-4)(1-x^2)^2} [2(\frac{k-2}{k+2})(1-x^{2+k})^2(\frac{R_{ao}}{R_{ai}})^2$$

$$+ (k-2) + 4x^{2+k} - x^4(2+k)] \qquad (B14)$$

$\alpha_o = -1$

$k=2, \quad n=1, \quad p=2, \quad \mu_s \to \infty$
_____

$\alpha_o = -1$

$$L_a = \frac{8\sin^2(\theta_{wa})N_{ta}^2 \ell_a \mu_o}{\pi \theta_{wa}^2 (1-x^2)^2} [\frac{(1-x^4)^2}{8}(\frac{R_{ao}}{R_{si}})^4 + x^4 \ln x + \frac{1-x^4}{4}] \quad (B15)$$

101

TABLE B-1 continued

k=2, n=1, p=2, μ_s not constrained
___

$$L_a = \frac{8\sin^2(\theta_{wa})N_{ta}^2 \ell_a \mu_o}{\alpha_o \pi \theta_{wa}^2 (1-x^2)^2} \left[-\frac{(1-x^4)^2}{}\left(\frac{R_{ao}}{R_{si}}\right)^4 \right.$$

$$\left. +\alpha_o[x^4 \ln x + \frac{(1-x^4)}{4} + \frac{(1-x^4)^2}{8} \left(\frac{R_{ao}}{R_{si}}\right)^4] \right\} \quad (B16)$$

α_o given by equation A71

k = np not constrained, μ_s not constrained
___

$$L_c = \sum_{\substack{n=1 \\ n \text{ odd}}}^{\infty} \frac{16\sin^2(\frac{k\theta_{wc}}{2})N_{tc}^2 \ell_c \mu_o}{\alpha_o n^3 \pi p \theta_{wc}(k^2-4)(1-z^2)^2} \left[2(\frac{2-k}{k+2})(1-z^{2+k})^2 \right.$$

$$\left. (\frac{R_{co}}{R_{si}})^{2k} + \alpha_o[(k-2)+4z^{2+k} - z^4(2+k)] \right\} \quad (B17)$$

α_o given by equation A68

k = np not constrained, $\mu_s \rightarrow \infty$
___

$$\alpha_o = -1$$

$$L_c = \sum_{\substack{n=1 \\ n \text{ odd}}}^{\infty} \frac{16\sin^2(\frac{k\theta_{wc}}{2})N_{tc}^2 \ell_c \mu_o}{n^3 \pi p \theta_{wc}(k^2-4)(1-z^2)^2} [2(\frac{k-2}{k+2})(1-z^{2+k})^2$$

$$(\frac{R_{co}}{R_{si}})^2 + (k-2) + 4z^{2+k} + z^4(2+k)] \quad (B18)$$

TABLE B-1 continued

$k=2$, $n=1$, $p=2$, μ_s not constrained
_____

$$L_c = \frac{8\sin^2(\theta_{wc})N_{tc}^2 \ell_c \mu_o}{\alpha_o \pi \theta_{wc}^2 (1-z^2)^2} \left[-\frac{(1-z^4)^2}{8} (\frac{R_{co}}{R_{si}})^4 \right.$$

$$\left. + \alpha_o [z^4 \ln z + \frac{(1-z^4)}{4} + \frac{(1-z^4)}{8} (\frac{R_{co}}{R_{si}})^4] \right] \qquad \text{(B19)}$$

α_o given by equation A71.

$k=2$, $n=1$, $p=2$, $\mu_s \to \infty$
_____

$$L_c = \frac{8\sin^2(\theta_{wc})N_{tc}^2 \ell_c \mu_o}{\pi \theta_{wc}^2 (1-z^2)^2} [\frac{(1-z^4)^2}{8} (\frac{R_{co}}{R_{si}})^4 + z^4 \ln z + \frac{1-z^4}{4}]$$

$$\text{(B20)}$$

$\alpha_o = -1$

$k=np$ not constrained, μ_s not constrained
_____

$$L_{ab} = \sum_{\substack{n=1 \\ n \text{ odd}}}^{\infty} \frac{16\sin^2(\frac{k\theta_{wa}}{2})N_{ta}^2 \ell_a \mu_o \cos(\frac{2n\pi}{3})}{\alpha_o n^3 p \theta_{wa}^2 (k^2-4)(1-x^2)^2} \left[2(\frac{2-k}{k+2})(1-x^{2+k})^2 \right.$$

$$\left. (\frac{R_{ao}}{R_{si}})^{2k} + \alpha_o [(k-2)+4x^{2+k}-x^4(2+k)] \right] \qquad \text{(B21)}$$

α_o given by equation A68.

103

TABLE B-1 continued

k=np not constrained, $\mu_s \to \infty$

$$L_{ab} = \sum_{\substack{n=1 \\ n \text{ odd}}}^{\infty} \frac{16\sin^2(\frac{k\theta_{wa}}{2})N_{ta}^2 \ell_a \mu_o \cos(\frac{2n\pi}{3})}{n^3 p\pi\theta_{wa}^2 (k^2-4)(1-x^2)^2}[2(\frac{k-2}{k+2})(1-x^{2+k})^2$$

$$(\frac{R_{ao}}{R_{si}})^2 + (k-2) + 4x^{2+k} - x^4(2+k)] \qquad (B22)$$

$\alpha_o = -1$

k=2, n=1, p=2, μ_s not constrained

$$L_{ab} = \frac{8\sin^2(\theta_{wa})N_{ta}^2 \ell_a \mu_o \cos(\frac{2\pi}{3})}{\alpha_o \pi\theta_{wa}^2 (1-x^2)^2}\left[-\frac{(1-x^4)^2}{8}(\frac{R_{ao}}{R_{si}})^4\right.$$

$$\left. + \alpha_o [x^4 \ln x + \frac{(1-x^4)}{4} + \frac{(1-x^4)^2}{8}(\frac{R_{ao}}{R_{si}})^4]\right) \qquad (B23)$$

α_o given by equation A71.

k=2, n=1, p=2, $\mu_s \to \infty$

$\alpha_o = -1$

$$L_{ab} = \frac{8\sin^2(\theta_{wa})N_{ta}^2 \ell_a \mu_o \cos(\frac{2\pi}{3})}{\pi\theta_{wa}^2 (1-x^2)^2}[\frac{(1-x^4)^2}{8}(\frac{R_{ao}}{R_{si}})^4$$

$$+ x^4 \ln x + \frac{1-x^4}{4}] \qquad (B24)$$

k=np not constrained, μ_s not constrained

$$L_a - L_{ab} = \frac{16\,\ell_a\mu_o\,N_{ta}^{\ 2}}{\alpha_o\pi\theta_{wa}^{\ 2}(1-x^2)^2}\ \sum_{\substack{n=1\\n\ \text{odd}}}^{\infty}\ \frac{\sin^2(\dfrac{k\theta_{wa}}{2})(1-\cos\dfrac{2n\pi}{3})}{n^3}\,C_{snp}$$

(B25)

$$C_{snp} = 2(\frac{2-k}{k+2})(1-x^{2+k})^2(\frac{R_{ao}}{R_{si}})^2+\alpha_o[(k-2)+4x^{2+k}-x^4(2+k)]$$

(B26)

α_o defined by equation A68.

k=np not constrained, $\mu_s \rightarrow \infty$

$$L_a - L_{ab} = \frac{16\ell_a\mu_o\,N_{ta}^{\ 2}}{\pi\theta_{wa}^{\ 2}(1-x^2)^2}\ \sum_{\substack{n=1\\n\ \text{odd}}}^{\infty}\ \frac{\sin^2(\dfrac{k\theta_{wa}}{2})(1-\cos\dfrac{2n\pi}{3})}{n^3}\,C_{snp}$$

(B27)

$$C_{snp} = 2(\frac{k-2}{k+2})(1-x^{2+k})^2(\frac{R_{ao}}{R_{si}})^2+(k-2)+4x^{2+k}-x^4(2+k)$$

(B28)

$\alpha_o = -1$

k=1, p=2, n=1, μ_s not constrained

$$L_a - L_{ab} = \frac{8\, \ell_a \mu_o\, N_{ta}^2}{\alpha_o \pi \theta_{wa}^2 (1-x^2)^2}\ \sin^2(\theta_{wa})(1-\cos\frac{2\pi}{3})\ C_{s2} \qquad \text{(B29)}$$

$$C_{s2} = -\frac{(1-x^4)^2}{8}\ (\frac{R_{ao}}{R_{si}})^4 + \alpha_o\, [x^4 \ln x + \frac{(1-x^4)}{4} + \frac{(1-x^4)^2}{8}\ (\frac{R_{ao}}{R_{si}})^4]$$

$$\text{(B30)}$$

α_o given by equation A71.

k=1, p=2, n=1, $\mu_s \to \infty$

$$\alpha_o = -1$$

$$L_a - L_{ab} = \frac{8\, \ell_a \mu_o\, N_{ta}^2}{\pi \theta_{wa}^2 (1-x^2)^2}\ \sin^2(\theta_{wa})(1-\cos\frac{2\pi}{3})\ C_{s2} \qquad \text{(B31)}$$

$$C_{s2} = \frac{(1-x^4)^2}{8}\ (\frac{R_{ao}}{R_{si}})^4 + x^4 \ln x + \frac{1-x^4}{4} \qquad \text{(B32)}$$

k=np not constrained, μ_s not constrained

$$M_{af} = \sum_{\substack{n=1 \\ n\ \text{odd}}}^{\infty} M_{nf}\ \cos k\, \phi \qquad \text{(B33)}$$

TABLE B-1 continued

where

$$M_{nf} = -\frac{32(1-y^{2+k})\, lmN_{ta}N_{tf}\mu_o \sin(\frac{k\theta_{wa}}{2})\sin(\frac{k\theta_{wf}}{2})}{\alpha_o \pi n^2 \theta_{wa}\theta_{wf}(1-y^2)(1-x^2)}\cdot(\frac{R_{fo}}{R_{ao}})^k C_{npf}$$

(B34)

$$C_{npf} = \frac{[1-x^{2-k} - \alpha_o(\frac{2-k}{2+k})(1-x^{2+k})(\frac{R_{ao}}{R_{si}})^{2k}]}{k(4-k^2)}$$

(B35)

α_o given by equation A68.

k=np not constrained, $\mu_s \to \infty$

$$M_{af} = \sum_{\substack{n=1 \\ n\,odd}}^{\infty} M_{nf} \cos k\,\phi,\quad \alpha_o = -1$$

(B33)

$$M_{nf} = \frac{32(1-y^{2+k})\, lm\mu_o N_{ta}N_{tf}\sin(\frac{k\theta_{wa}}{2})\sin(\frac{k\theta_{wf}}{2})(\frac{R_{fo}}{R_{ao}})^k C_{npf}}{\pi n^2 \theta_{wa}\theta_{wf}(1-y^2)(1-x^2)}$$

(B36)

$$C_{npf} = \frac{[1-x^{2-k} + (\frac{2-k}{2+k})(1-x^{2+k})(\frac{R_{ao}}{R_{si}})^{2k}]}{k(4-k^2)}$$

(B37)

k=2, n=1, p=2, μ_s not constrained

$$M_{2f} = \frac{-32lm\mu_o N_{ta}N_{tf}\sin(\theta_{wa})\sin(\theta_{wf})}{\alpha_o \pi \theta_{wa}\theta_{wf}(1-y^2)(1-x^2)}(\frac{R_{fo}}{R_{ao}})^2(1-y^4)C_{2f}$$

(B38)

$$C_{2f} = -\frac{1}{8}\ln x - \alpha_o \frac{(1-x^4)}{32}(\frac{R_{ao}}{R_{si}})^4$$

(B39)

107

TABLE B-1 continued

α_o given by equation A71

k=2, n=1, p=2, $\mu_s \to \infty$
_____

$$M_{2f} = \frac{321m\mu_o N_{ta} N_{tf} \sin(\theta_{wa}) \sin(\theta_{wf})}{\pi \theta_{wa} \theta_{wf} (1-y^2)(1-x^2)} (\frac{R_{fo}}{R_{ao}})^2 (1-y^4) C_{2f}$$

(B40)

$$C_{2f} = -\frac{1}{8} \ln x + \frac{(1-x^4)}{32} (\frac{R_{ao}}{R_{si}})^4$$ (B41)

k=np not constrained, μ_s not constrained
_____

$$M_{ac} = \sum_{\substack{n=1 \\ n \text{ odd}}}^{\infty} M_{nc} \cos k (\phi+\alpha)$$ (B42)

where,

$$M_{nc} = \frac{-321mN_{ta} N_{tc} \mu_o \sin(\frac{k\theta_{wa}}{2}) \sin(\frac{k\theta_{wc}}{2})}{\alpha_o \pi n^2 \theta_{wa} \theta_{wc} (1-x^2)(1-z^2)} (\frac{R_{co}}{R_{ao}})^k C_{npc}$$ (B43)

$$C_{npc} = \frac{[1-x^{2-k} - \alpha_o (\frac{2-k}{2+k})(1-x^{2+k})(\frac{R_{ao}}{R_{si}})^{2k}]}{k(4-k^2)}$$ (B44)

α_o given by equation A68.

k=np not constrained, $\mu_s \to \infty$
_____

$\alpha_o = -1$

$$M_{nc} = \frac{321 lm\mu_o N_{ta} N_{tf} \; \sin(\frac{k\theta_{wa}}{2}) \sin(\frac{k\theta_{wc}}{2})}{\pi n^2 \theta_{wa} \theta_{wc} \; (1-x^2)(1-z^2)} \; (\frac{R_{co}}{R_{ao}})^k \; C_{npc} \qquad (B45)$$

$$C_{npc} = \frac{[1-x^{2-k} + (\frac{2-k}{2+k})(1-x^{2+k})(\frac{R_{ao}}{R_{si}})^{2k}]}{k(4-k^2)} \qquad (B46)$$

$k=2$, $n=1$, $p=2$, μ_s not constrained
___

$$M_{2c} = \frac{-321 lm\mu_o N_{ta} N_{tc} \sin(\theta_{wa}) \sin(\theta_{wc})}{\alpha_o \pi \theta_{wa} \theta_{wc} (1-x^2)(1-z^2)} \; (\frac{R_{co}}{R_{ao}})^2 \; C_{2c} \qquad (B47)$$

$$C_{2c} = -\frac{1}{8} \ln x - \alpha_o \; \frac{(1-x^4)}{32} \; (\frac{R_{ao}}{R_{si}})^4 \qquad (B48)$$

α_o given by equation A71.

$k=2$, $n=1$, $p=2$, $\mu_s \rightarrow \infty$
___

$$\alpha_o = -1$$

$$M_{2c} = \frac{321 lm\mu_o N_{ta} N_{tc} \sin(\theta_{wa}) \sin(\theta_{wc})}{\pi \theta_{wa} \theta_{wc} (1-x^2)(1-z^2)} \; (\frac{R_{co}}{R_{ao}})^2 \; C_{2c} \qquad (B49)$$

$$C_{2c} = -\frac{1}{8} \ln x + \frac{(1-x^4)}{32} \; (\frac{R_{ao}}{R_{si}})^4 \qquad (B50)$$

TABLE B-1 continued

k=np not constrained, μ_s not constrained
_____

$$M_{fc} = \sum_{\substack{n=1 \\ n \text{ odd}}}^{\infty} M_{nfc} \cos k \alpha \tag{B51}$$

where,

$$M_{nfc} = \frac{-32(1-y^{2+k}) lmN_{tc}N_{tf}\mu_o \sin(\frac{k\theta_{wf}}{2}) \sin(\frac{k\theta_{wc}}{2})}{\alpha_o \pi n^2 \theta_{wc}\theta_{wf}(1-y^2)(1-z^2)} (\frac{R_{co}}{R_{fo}})^{2k} C_{npfc} \tag{B52}$$

$$C_{npfc} = \frac{[1-z^{2-k} - \alpha_o(\frac{2-k}{2+k})(1-z^{2+k})(\frac{R_{co}}{R_{si}})^{2k}]}{k(4-k)^2} \tag{B53}$$

α_o given by equation A68.

k=np not constrained, $\mu_s \to \infty$
_____

$$M_{fc} = \sum_{\substack{n=1 \\ n \text{ odd}}}^{\infty} M_{nfc} \cos k \alpha, \quad \alpha_o = -1 \tag{B54}$$

$$M_{nfc} = \frac{32(1+y^{2+k}) lmN_{tc}N_{tf}\mu_o \sin(\frac{k\theta_{wf}}{2}) \sin(\frac{k\theta_{wc}}{2})}{\pi n^2 \theta_{wc}\theta_{wf}(1-y^2)(1-z^2)} (\frac{R_{co}}{R_{fo}})^{k} C_{npfc} \tag{B55}$$

$$C_{npfc} = \frac{[1-z^{2-k} + (\frac{2-k}{2+k})(1-z^{2+k})(\frac{R_{co}}{R_{si}})^{2k}]}{k(4-k)^2} \tag{B56}$$

TABLE B-1 continued

$k=2$, $n=1$, $p=2$, μ_s not constrained

$$M_{2fc} = \frac{-321m\mu_o(1-y^4)lmN_{tc}N_{tf}\sin\theta_{wc}\sin\theta_{wf}}{\alpha_o \pi \theta_{wc}\theta_{wf}(1-y^2)(1-z^2)}(\frac{R_{co}}{R_{fo}})^2 C_{2fc}$$

(B57)

$$C_{2fc} = -\frac{1}{8}\ln z - \alpha_o \frac{(1-z^4)}{32}(\frac{R_{co}}{R_{si}})^4$$

(B58)

α_o given by equation A71.

$k=2$, $n=1$, $p=2$, $\mu_s \to \infty$

$$M_{2fc} = \frac{321m\mu_o N_{tc}N_{tf}\sin\theta_{wc}\sin\theta_{wf}}{ }(\frac{R_{fo}}{R_{ao}})^2(1-y^4) C_{2fc}$$

(B59)

$$C_{2fc} = -\frac{1}{8}\ln z + \frac{(1-z^4)}{32}(\frac{R_{co}}{R_{si}})^4$$

(B60)

We may determine all additional machine self and mutual inductances by making the substitutions listed below in Table B-2.

To Obtain	Use Formula For	Equation Nos.	Replace	With
M_{bf}	M_{af}	B33 through B41	ϕ	$\phi - \dfrac{2\pi}{3}$
M_{cf}	M_{af}	B33 through B41	ϕ	$\phi + \dfrac{2\pi}{3}$
M_{bc}	M_{ac}	B42 through B50	$\phi + \alpha$	$\phi + \alpha - \dfrac{2\pi}{3}$
M_{cc}	M_{ac}	B42 through B50	$\phi + \alpha$	$\phi + \alpha + \dfrac{2\pi}{3}$

TABLE B-2.   Substitutions for Machine Inductances

APPENDIX C

MACHINE INTERNAL TORQUE EXPRESSIONS

Using the basic concepts developed in reference 7 and other sources, expressions for machine internal torque are developed. Specifically, expressions for torque on the armature and for null torque on the field with a compensating winding either within or outside of the field are presented.

In general, the Lorentz force is representative of the total magnetic force on a charge of moving with a velocity $\overline{V}$ and may be expressed as:

$$\overline{F} = q\overline{V} \times \overline{B} \tag{C1}$$

The force density, $\overline{F}$, in newtons per cubic meter can be obtained from C1 as:

$$\overline{F} = \lim_{\delta v \to 0} \frac{\sum_i \overline{F}_i}{\delta v} = \lim_{\delta v \to 0} \sum_i \frac{q_i \overline{V}_i \times B_i}{\delta v} \tag{C2}$$

$\overline{F}_i, q_i,$ and $\overline{V}_i$ refer to all particles in δv and $\overline{B}_i$ is the flux density experienced by q_i. Assuming all particles in δv experience the same flux density $\overline{B}$, the definition of free current density and equation C2 yields:

$$\overline{F} = \overline{J}_f \times \overline{B} \tag{C3}$$

113

Equation C3 may be used to express the average of forces
on the charges flowing in the winding. This is equivalent to
the force on the winding if there is some mechanism by which
each charge transmits the Lorentz force to the material.
Assuming that the charges in the winding conductors behave as
particles moving through a viscous material, the force acting
on each charge is transmitted to the medium by the viscous
retarding force, and equation C3 represents the force density
experienced by the medium (7).

It is also assumed that the windings have a constant
permeability approximating that of free space and that

$$\overline{B} = \mu_o \overline{H} \quad \text{is valid within the winding volume.} \quad \text{(C4)}$$

Substituting for $\overline{B}$, equation C3 becomes

$$\overline{F} = \mu_o (\overline{J}_f \times \overline{H}) \quad \text{(C5)}$$

Expressions for radial and azimuthal components of $\overline{H}$ are
developed for various boundary conditions at the shield inner
radius in Appendix A.

Equation C5 may be expressed in a matrix form as:

$$\overline{F} = \mu_o \begin{vmatrix} \overline{1}_r & \overline{1}_\theta & \overline{1}_z \\ 0 & 0 & J \\ H_r & H_\theta & 0 \end{vmatrix} \quad \text{(C6)}$$

114

or

$$\overline{F} = \mu_o J (H_r \overline{1}_\theta - H_\theta \overline{1}_r) \qquad \text{(C7)}$$

Field Winding Null Torque Expression:

Referring to Figure C-1, the torque on the field winding may be expressed as

$$\overline{T} = \int_V (\overline{r} \times \overline{F}) \, dv = \int_V (\overline{r} \times \overline{F}) \, r dr d\theta dz \qquad \text{(C8)}$$

$$\frac{\overline{T}}{\ell_f} = \int_\theta \int_r (\overline{r} \times \overline{F}) \, r dr d\theta \qquad \text{(C9)}$$

$$\overline{r} \times \overline{F} = \begin{vmatrix} \overline{1}_r & \overline{1}_\theta & \overline{1}_z \\ r & 0 & 0 \\ F_r & F_\theta & 0 \end{vmatrix} = r F_\theta \overline{1}_z \qquad \text{(C10)}$$

Using C10, equation C9 becomes:

$$\frac{\overline{T}}{\ell_f} = \int_\theta \int_{R_{fi}}^{R_{fo}} r^2 F\theta dr d\theta \, \overline{1}_z \qquad \text{(C11)}$$

Equation C11 represents torque only on one pole face, and for the entire machine,

$$\frac{\overline{T}}{\ell_f} = 2p \int_\theta \int_{R_{fi}}^{R_{fo}} \mu_o J_f H_r r^2 dr d\theta \, \overline{1}_z \qquad \text{(C12)}$$

115
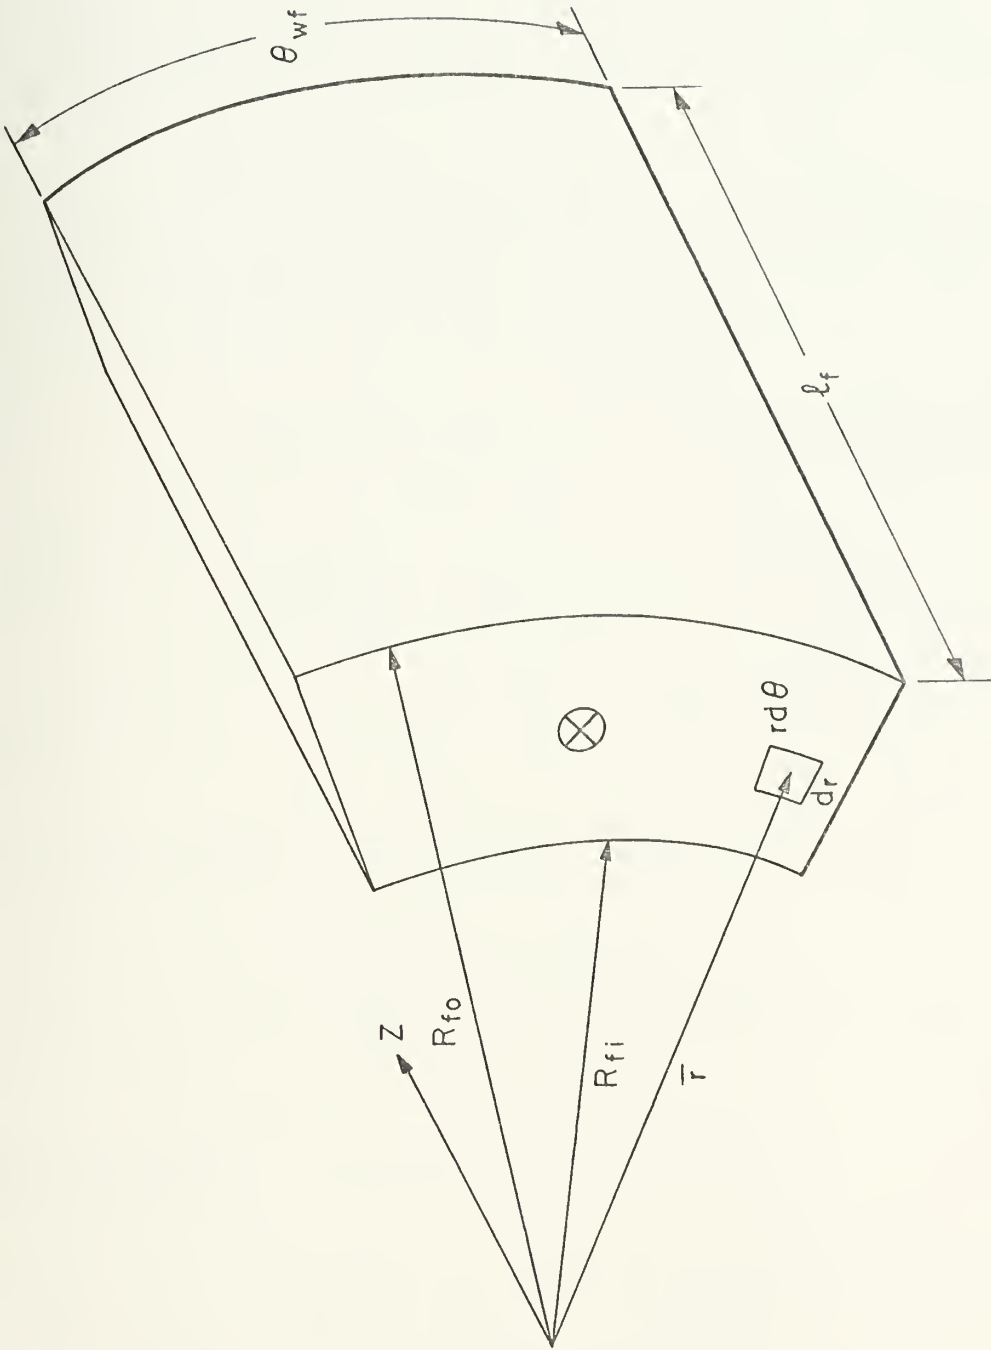
Figure C-I Field Winding Pole Face Isometric

Consider the machine configured as in Figure 1 with the compensator located between the armature and the field. Using equation A83, H_r may be expressed as

$$H_r = \frac{3}{2} \cos k (\theta + \phi) H_{rao} + H_{rco} \tag{C13}$$

or,

$$H_r = \sum_{\substack{n=1 \\ n \text{ odd}}}^{\infty} \frac{2}{n\pi} \left(\frac{r^{k-1} - \alpha_o R_{si}^{2k} r^{-k-1}}{\alpha_o R_{si}^{2k}} \right) \left[\frac{3J_a}{2} \left(\frac{R_{ao}^{2+k} - R_{ai}^{2+k}}{2+k} \right) \right.$$

$$\sin\left(\frac{k\theta_{wa}}{2}\right) \cos k(\theta + \phi) + J_c \left(\frac{R_{co}^{2+k} - R_{ci}^{2+k}}{2+k} \right)$$

$$\left. \sin\left(\frac{k\theta_{wc}}{2}\right) \sin k (\theta\alpha) \right] \tag{C14}$$

Define

$$\Gamma = \frac{3J_a}{2} \left(\frac{R_{ao}^{2+k} - R_{ai}^{2+k}}{2+k} \right) \sin\left(\frac{k\theta_{wa}}{2}\right) \cos k (\theta - \phi)$$

$$+ J_c \left(\frac{R_{co}^{2+k} - R_{ci}^{2+k}}{2+k} \right) \sin\left(\frac{k\theta_{wc}}{2}\right) \sin k (\theta - \alpha) \tag{C15}$$

Whereas, equation C12 becomes

$$\frac{\bar{T}}{\ell_f} = \sum_{\substack{n=1 \\ n \text{ odd}}}^{\infty} \frac{4p\mu_o J_f}{n\pi} \int_\theta \int_{R_{fi}}^{R_{fo}} \left(\frac{r^{k-1} - \alpha_o R_{si}^{2k} r^{-k-1}}{\alpha_o R_{si}^{2k}} \right) \Gamma r^2 dr d\theta \tag{C16}$$

117

Integrating C16 and dropping the vector notation, C16 becomes

$$\frac{T}{\ell_f} = \sum_{\substack{n=1 \\ n \text{ odd}}}^{\infty} \frac{4 p \mu_o J_f}{n\pi} \left[\frac{R_{fo}^{2+k} - R_{fi}^{2+k}}{2+k} - \frac{\alpha_o R_{si}^{2k}(R_{fo}^{2-k} - R_{fi}^{2-k})}{2-k} \right]$$

$$\int_{\theta} \frac{\Gamma}{\alpha_o R_{si}^{2k}}\, d\theta \qquad (C17)$$

Define

$$\eta \equiv \left[\frac{R_{fo}^{2+k} - R_{fi}^{2+k}}{2+k} - \alpha_o R_{si}^{2k}\, \frac{(R_{fo}^{2-k} - R_{fi}^{2-k})}{2-k} \right] \frac{4 \mu_o J_f}{n\pi \alpha_o R_{si}^{2k}}$$

$$(C18)$$

and integrating equation C16 across the pole face

$$\frac{T}{\ell_f} = \sum_{\substack{n=1 \\ n \text{ odd}}}^{\infty} \eta \int_{-\frac{\theta_{wf}}{2}}^{\frac{\theta_{wf}}{2}} [\, \zeta_1 \cos k(\theta+\phi) + \zeta_2 \sin k\,(\theta-\alpha)]\, d\theta \qquad (C19)$$

where

$$\zeta_1 = \frac{3 J_a}{2} \left(\frac{R_{ao}^{2+k} - R_{ai}^{2+k}}{2+k} \right) \sin\left(\frac{k\theta_{wa}}{2}\right) \qquad (C20)$$

$$\zeta_2 = J_c \left(\frac{R_{co}^{2+k} - R_{ci}^{2+k}}{2+k} \right) \sin\left(\frac{k\theta_{wc}}{2}\right) \qquad (C21)$$

The integration of C19 yields:

$$\frac{T}{\ell_f} = \sum_{\substack{n=1 \\ n \text{ odd}}}^{\infty} \frac{\eta}{k} \left\{ \zeta_1 [\sin k\,(\frac{\theta_{wf}}{2}+\phi) - \sin k(\phi - \frac{\theta_{wf}}{2})] \right.$$

$$\left. - \zeta_2 [\cos k(\frac{\theta_{wf}}{2}-\alpha) - \cos k(\frac{\theta_{wf}}{2}+\alpha)] \right\} \qquad (C22)$$

118

Which reduces to:

$$\frac{T}{\ell} = \sum_{\substack{n=1 \\ n \text{ odd}}}^{\infty} \frac{2\eta}{k} \left[\zeta_1 \sin\left(\frac{k\theta_{wf}}{2}\right) \cos k\phi - \zeta_2 \sin\left(\frac{k\theta_{wf}}{2}\right) \cos k\alpha \right] \quad (C23)$$

In equation C23 the current in the armature winding is specified to vary as $\cos \omega_e t$. Equation C23 may be expressed as

$$\frac{T}{\ell} = \sum_{\substack{n=1 \\ n \text{ odd}}}^{\infty} \sigma_1 \cos k\phi - \sigma_2 \cos k\alpha \quad (C24)$$

when

$$\sigma_1 = \frac{2\eta}{k} \zeta_1 \sin\left(\frac{k\theta_{wf}}{2}\right)$$

$$\sigma_2 = \frac{2\eta}{k} \zeta_2 \sin\left(\frac{k\theta_{wc}}{2}\right) \quad (C25)$$

The condition for null torque on the field winding becomes

$$\sum_{\substack{n=1 \\ n \text{ odd}}}^{\infty} \sigma_1 \cos k\phi - \sigma_2 \cos k\alpha = 0 \quad (C26)$$

Which leads to a set of null torque requirements encompasing all odd harmonics.

Considering only the first harmonic, equation C26 yields as the condition for null field torque.

$$\sigma_1 \cos k\phi = \sigma_2 \cos k\alpha \quad (C27)$$

or $\quad \cos k\phi = J_c \Lambda_1 \cos k\alpha \quad (C28)$

where,

$$\Lambda_1 = \frac{2}{3J_a} \left(\frac{R_{co}^{2+k} - R_{ci}^{2+k}}{R_{ao}^{2+k} - R_{ai}^{2+k}}\right) \frac{\sin\left(\frac{k\theta_{wc}}{2}\right)}{\sin\left(\frac{k\theta_{wa}}{2}\right)} \tag{C29}$$

For a four pole machine, considering the first harmonic only, equations C28 and C29 may be expressed as:

$$\cos 2\phi = J_c \Lambda_1 \cos 2\alpha \tag{C30}$$

$$\Lambda_1 = \frac{2}{3J_a} \left(\frac{R_{co}^4 - R_{ci}^4}{R_{ao}^4 - R_{ai}^4}\right) \frac{\sin\theta_{wc}}{\sin\theta_{wa}}$$

Consider the machine configured as in Figure 1 with the compensator located between the main field winding and the shield. Using equation A83, H_r may be expressed as:

$$H_r = \frac{3}{2} \cos k(\theta + \phi) H_{rao} + H_{rci} \tag{C31}$$

$$H_r = \sum_{\substack{n=1 \\ n\ \text{odd}}}^{\infty} \frac{2}{n\pi} \left[\frac{3J_a}{2}\left(\frac{r^{k-1} - \alpha_o R_{si}^{2k} r^{-k-1}}{\alpha_o R_{si}^{2k}}\right)\left(\frac{R_{ao}^{2+k} - R_{ai}^{2+k}}{2+k}\right)\right.$$

$$\left.\sin\left(\frac{k\theta_{wa}}{2}\right)\cos k(\theta+\phi) + J_c\left(\frac{r^{k-1}}{\alpha_o R_{si}^{2k}}\right)\Omega_c \sin\left(\frac{k\theta_{wc}}{2}\right)\sin k(\theta-\alpha)\right] \tag{C32}$$

where Ω_c is expressed in equation A3, modified by Table A3. Substituting C32 into C11 and integrating yields:

$$\cos k\phi = J_c \Lambda_2 \cos k\alpha \tag{C33}$$

120

where

$$\Lambda_2 = \frac{2}{3J_a} \frac{\sin\left(\frac{k\theta_{wc}}{2}\right)}{\sin\left(\frac{k\theta_{wa}}{2}\right)} \frac{(R_{fo}^{2+k} - R_{fi}^{2+k})}{(R_{ao}^{2+k} - R_{ai}^{2+k})} \left[\frac{(2-k)(R_{co}^{2+k} - R_{ci}^{2+k})}{(2-k)(R_{fo}^{2+k} - R_{fi}^{2+k})}\right.$$

$$\left.\frac{-\alpha_o(2+k)R_{si}^{2k}(R_{co}^{2-k} - R_{ci}^{2-k})}{-\alpha_o(2+k)R_{si}^{2k}(R_{fo}^{2-k} - R_{fi}^{2-k})}\right] \tag{C34}$$

For a four pole machine, considering only the first harmonic C33 and C34 become:

$$\cos 2\phi = J_c \ \Lambda_2 \ \sin 2\alpha \tag{C35}$$

$$\Lambda_2 = \frac{2\sin\theta_{wc}}{3J_a \sin\theta_{wa}} \frac{(R_{fo}^4 - R_{fi}^4)}{(R_{ao}^4 - R_{ai}^4)} \left[\frac{R_{co}^4 - R_{ci}^4 - 4\alpha_o R_{si}^4 \ln}{R_{fo}^4 - R_{fi}^4 - 4\alpha_o R_{si}^4 \ln}\right.$$

$$\left.\frac{\left(\frac{R_{co}}{R_{ci}}\right)}{\left(\frac{R_{fo}}{R_{fi}}\right)}\right] \tag{C36}$$

Note that for most windings where z and y are greater than .9, Λ_2 reduces for the four pole first harmonic case to approximately the same value as Λ_1, if we consider a laminated iron shell.

Armature Torque Expression

The expression for H_r in the region $R_{ai} < r < R_{ao}$ is

121

$$H_r = H_{rfi} + H_{rci} \tag{C36}$$

Using equations A61 and A61, as modified by Table A3, equation C36 may be expressed as

$$H_r = \sum_{\substack{n=1 \\ n \text{ odd}}}^{\infty} \frac{2}{n\pi} \left(\frac{r^{k-1}}{\alpha_o R_{si}^{2k}}\right) [J_f \Omega_f \sin\frac{k\theta_{wf}}{2} \sin k\,\theta$$

$$+ J_c \Omega_c \sin\frac{k\theta_{wc}}{2} \sin k(\theta-\alpha)] \tag{C37}$$

where α_o, Ω_c, and Ω_f are expressed by equations A68, A56, and A56 modified by Table A3 respectfully.

Using equation C11 and integrating through the armature winding, the armature torque per unit length is

$$\frac{T_a}{\ell_a} = \frac{24\mu_o J_a}{n^2\pi} \left(\frac{1}{\alpha_o R_{si}^{2k}}\right) \left(\frac{R_{ao}^{2+k} - R_{ai}^{2+k}}{2+k}\right) \sin\frac{k\theta_{wa}}{2}$$

$$[J_f \Omega_f \sin\frac{k\theta_{wf}}{2} \sin k\,\phi + J_c \Omega_c \sin\frac{k\theta_{wc}}{2} \sin k(\phi-\alpha)] \tag{C38}$$

When k=2, n=1, p=2; equation 38 becomes

$$\frac{T_a}{\ell_a} = \frac{6\mu_o J_a \sin\theta_{wa}}{\pi\alpha_o R_{si}^4} (R_{ao}^4 - R_{ai}^4) [J_f \Omega_f \sin\theta_{wf} \sin 2\,\phi$$

$$+ J_c \Omega_c \sin\theta_{wc} \sin 2(\phi-\alpha)] \tag{C39}$$

122

When Ω_f and Ω_c are expressed by equations A56 and A56 modified by Table A3 respectfully.

APPENDIX D

MACHINE SIZING AND LOSSES

As discussed in preceeding sections, this thesis addresses machines which may find applications in SWATH, hydrofoil, and SES vehicles. Current designs indicate machine dimensions and power requirements as indicated in Table D-1. Note the relatively large ℓ/D required for hydrofoil applications.

Using the shaft horsepower requirements for various applications as listed in Table D-1, an estimate of minimum shaft radius may be made. This is equivalent to estimating the machine armature inner radius, R_{ai}.

Shaft shear stress $\tau_{\theta z}$ may be expressed as (see reference 8)

$$\tau_{\theta z} = \frac{M_t R_{ai}}{I_z} \tag{D1}$$

where $M_t = \frac{PWR}{\omega_m}$, $I_z = \frac{\pi R_{ai}^4}{2}$, assuming a solid machine shaft.

$$\tag{D2, D3}$$

Substituting D2 and D3 into D1 and solving for R_{ai},

$$R_{ai} = [\frac{PWR(60)}{\pi^2 \tau_{\theta z} N}]^{1/3} \tag{D3}$$

Where N = machine RPM. Table D-2 is a summary of machine minimum R_{ai} for a $\tau_{\theta z}$ of 30,000 psi.

124

NAVAL APPLICATION	NUMBER OF MACHINES REQUIRED	APPROX. MACHINE DIAMETER ALLOWED (in) D	APPROX. MACHINE LENGTH ALLOWED (in) ℓ	$\dfrac{\ell}{D}$	APPROX. MACHINE SHAFT HORSE-POWER RATING (each)
SWATH (see Fig.2)	2	96	120	1.25	40,000
HYDROFOIL (see Fig.4)	2	54	100	1.85	20,000
SES (see Fig.3)	2	72	90	1.25	30,000

TABLE D-1 Current Machine Vehicle Application Parameters

PWR (hp)	N (RPM)	Minimum R_{ai} (in)	Possible Application
20,000	1800	2.5	HYDROFOIL
30,000	900	3.6	SES
40,000	180	6.7	SWATH

TABLE D-2 Minimum Armature Shaft Inner Radaii for Indicated Naval Applications

The machine RPM is a function of the drive train characteristics between the motor and the propeller and propeller characteristics in general. Machine RPM may be adjusted by varying either the number of machine poles or frequency of armature current. The shaft radius actually employed is increased to account for some margin of safety.

An examination of Figure 11, reference 7 (approximately reproduced herein as Figure D-1), indicates the approximate domain of magnetic shear stress to be expected for machines of various power ratings. As a design guide the machine in this presentation should fall within the cross-hatched area indicated in Figure D-1.

The magnetic shear stress may be expressed as

$$\sigma_m = \frac{(PWR)P}{(2\pi R_{ao})^2 \ell f} \qquad (D4)$$

Figure D-1 and equation D4 together may be used to select a "reasonable" value of σ_m for any particular design. Equation D3, D4 and machine power as expressed by equation 12 are used to formulate the machine physical size exclusive of the shield.

Assuming an iron shield is employed, its thickness may be found by integrating the magnetic field density across the pole face of each winding at R_{si}, summing the resulting values, and determining the thickness from an assumed maximum magnetic flux density in the shield. As a design constraint, a value of 1.5 Teslas is assumed to be the maximum value.

126
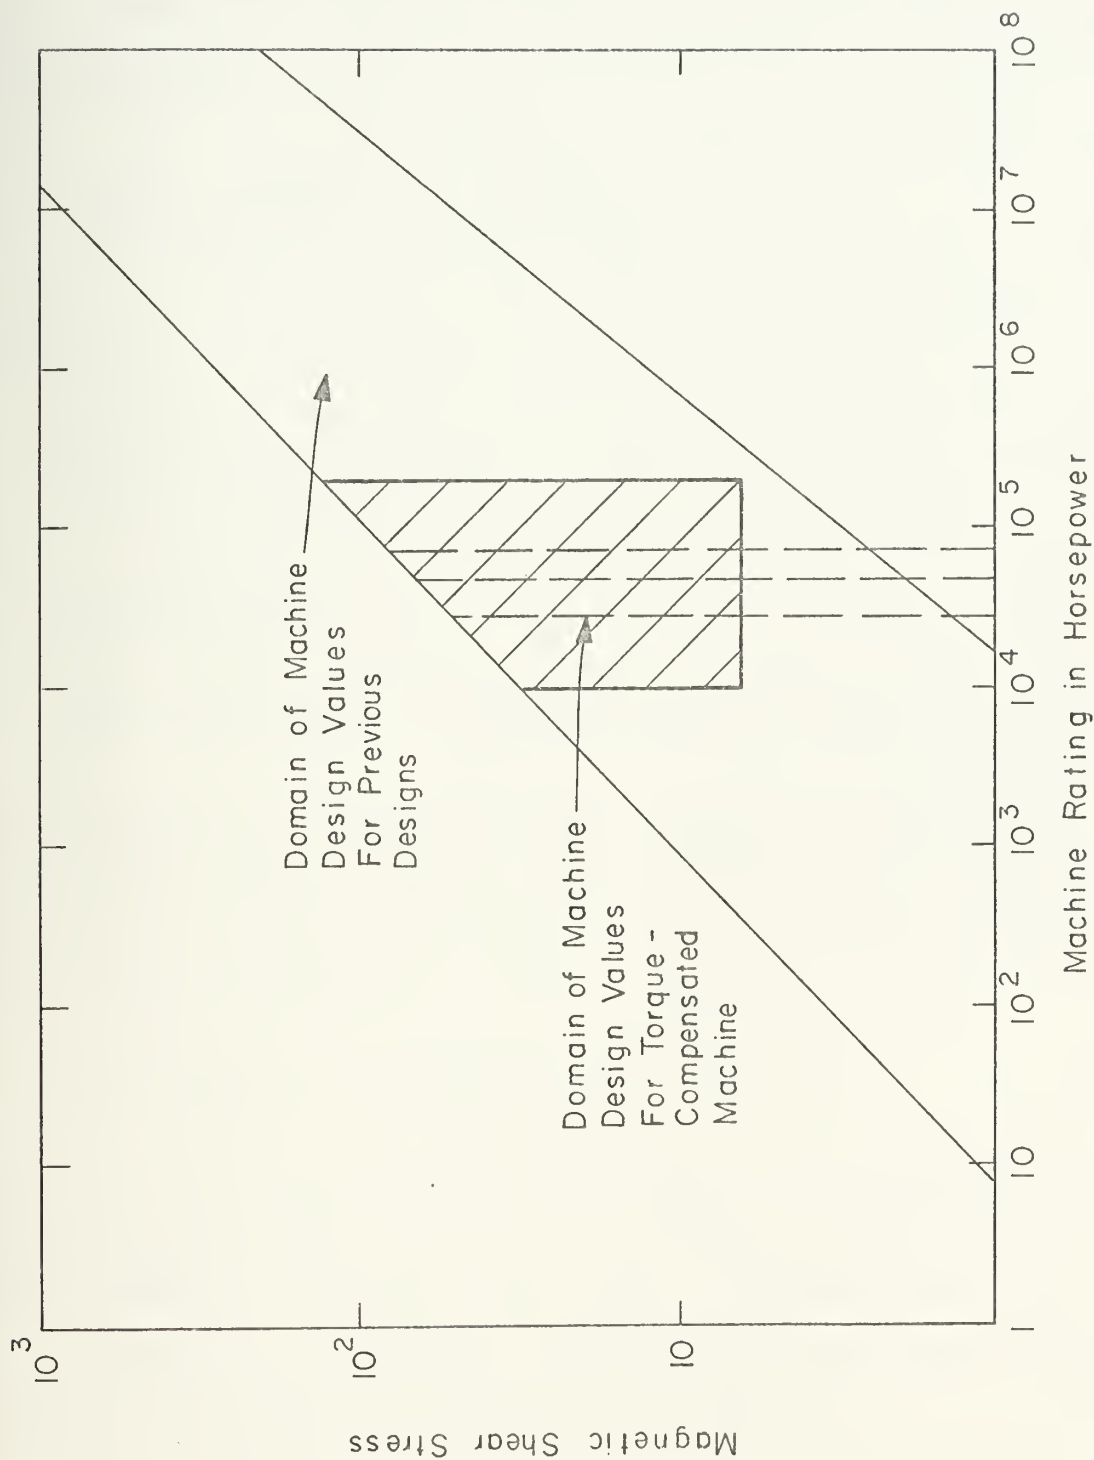
Figure D-1   Machine Shear Stress Versus Machine Rating (7)

Referring to Figure D2 and assuming that all flux from each winding generated in the radial direction enters the shield material, the total radial flux and iron shield flux is found from

$$\Phi_s = \int_A \overline{B}_o \cdot d\overline{A} = \mu_o \int_A \overline{H}_o \cdot d\overline{A} \tag{D5}$$

where

$$\overline{H}_o = (H_{rfo} + H_{rco} + \hat{H}_{rao})\overline{1}_r + (H_{\theta fo} + H_{\theta co} + \hat{H}_{\theta ao})\overline{1}_\theta \tag{D6}$$

$$d\overline{A} = rd\theta dz\, \overline{1}_r$$

$$\overline{H}_{ao} = \frac{3}{2}(H_{rao}\,\overline{1}_r + H_{\theta ao}\,\overline{1}_\theta)\,;\quad \hat{H}_{rao} = \frac{3}{2}H_{rao} \tag{D7}$$

The limits of integration in the θ direction will vary according to each element's included winding angle. Equation D5 may be written as

$$\Phi_s = R_{si}\ell_t\mu_o \int_\theta (H_{rfo} + H_{rco} + \hat{H}_{rao})d\theta \tag{D8}$$

Treating only the k=2, n=1, p=2 machine, the field strengths may be found from equation A86 with the appropriate substitution.

Once Φ_s is determined, constrained as mentioned above, the shield minimum thickness may be found as

$$(R_{so} - R_{si}) = \frac{\Phi_s}{B_{max}\ell_t} \tag{D9}$$
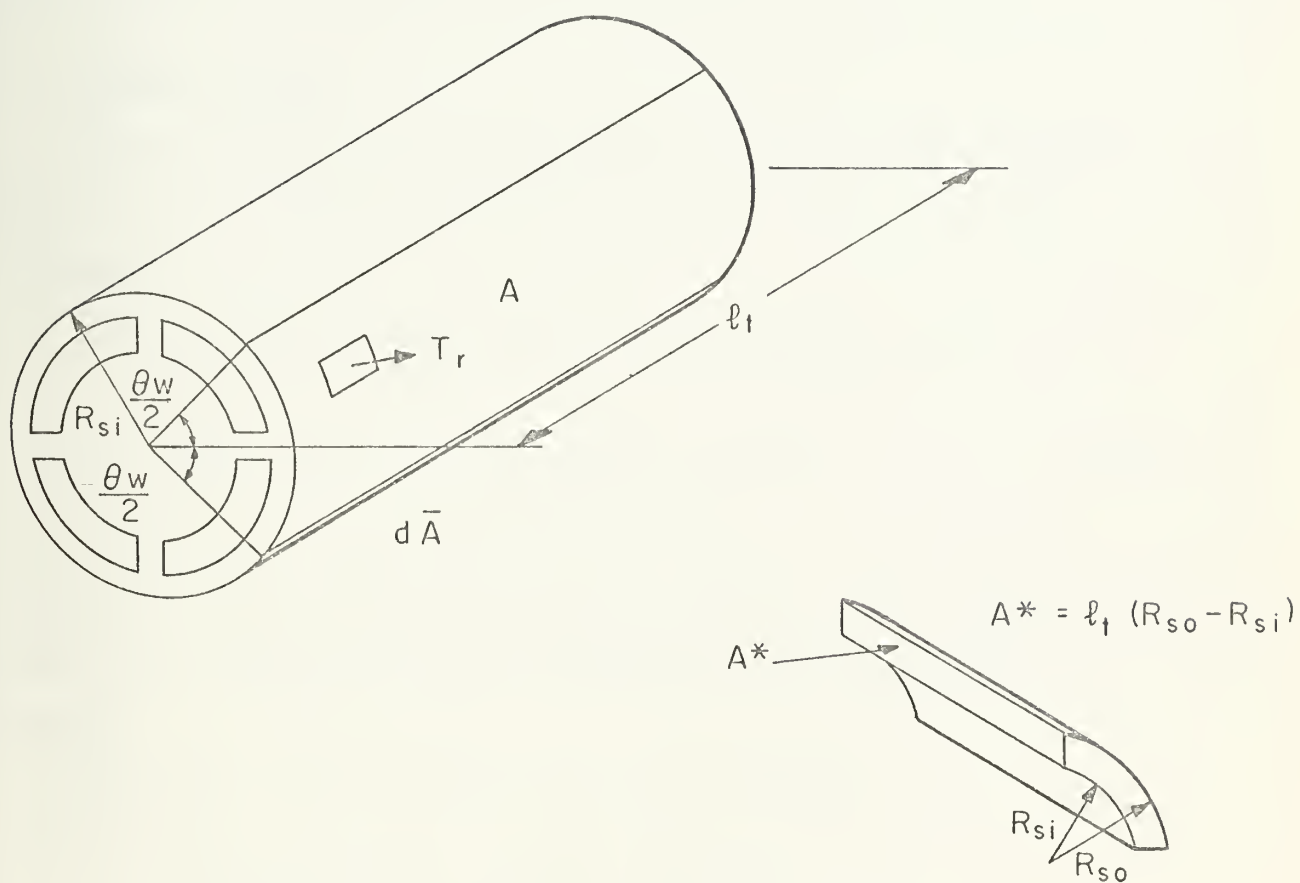
Figure D-2   Winding and Shield Configuration for Shield Thickness
Determination

B_{max} is chosen from Figure 15a, reference 9, to be 1.5 Tesla. The philosophy of shield design is based on the need to protect personnel in an operating space or prevent undue electromagnetic radiation from the vessel.

Machine Losses

Machine losses may be attributed to two primary sources. Sources such as bearing friction, windage, etc., are not addressed.

a) Conductor losses due to current flow, J_a and J_c:

$$P_c = \frac{3p\ell_c}{\sigma\lambda} [J_a^2 R_{ao}^2 (1-x^2) + J_c^2 R_{co}^2 (1-z^2)] \tag{D10}$$

In equation D10, the space winding factor, λ, is assumed to be essentially the same for both armature and compensator windings.

b) Eddy - current losses in the armature:

$$P_{ec} = \frac{3p\theta_{wa} R_{ao}^2 (1-x^2) \omega_e^2 \sigma\lambda\ell_{ed} d_w^2 B_{av}^2}{32} \tag{D11}$$

where B_{av}^2 is the mean-square magnetic field seen by the armature conductors:

$$B_{av}^2 = \frac{1}{R_{ao} - R_{ai}} \int_{R_{ao}}^{R_{ai}} B_{rfi}^2 dr \tag{D12}$$

B_{rfi} given by equations A56, A61, or A68 as applicable.

130

c) Losses due to eddy currents and hysteresis losses in the shield is considered to be negligible because of the large armature-shield separation ($R_{ai} \ll R_{si}$). Losses in the shaft material and armature winding support structure are recognized but not addressed in this analysis.

APPENDIX E

DERIVATION OF MACHINE CHARACTERISTICS AND RATING EXPRESSIONS

Referring to Figure E1, through trigonometric manipulation it may be shown that:

$$E_F = V_T + X_A I_A \ (\sin \psi - \cos \psi \cot \alpha) \tag{E1}$$

The internal exitation voltage, E_F, may be expressed as:

$$E_F = \frac{\omega_e M_{1f} I_f}{\sqrt{2}} \tag{E2}$$

Where, from equation B34

$$M_{1f} = \frac{-32(1-y^{2+p}) \ell_m N_{ta} N_{tf} \mu_o \sin(\frac{p\theta_{wa}}{2}) \sin(\frac{p\theta_{wf}}{2})}{\alpha_o \pi \theta_{wa} \theta_{wf} (1-y^2)(1-x^2)} (\frac{R_{fo}}{R_{ao}})^p C_{1pf} \tag{E3}$$

and

$$C_{1pf} = \frac{[1-x^{2-p} - \alpha_o (\frac{2-p}{2+p})(1-x^{2+p})(\frac{R_{ao}}{R_{si}})^{2p}]}{p(4-p^2)} \tag{E4}$$

As a matter of convenience define

$$MIFA = \frac{-32 \ell_m C_{1pf} \mu_o \ \sin(\frac{p\theta_{wa}}{2}) \sin(\frac{p\theta_{wf}}{2})(1-y^{2+p})}{\alpha_o \pi \theta_{wa} \theta_{wf}(1-y^2)(1-x^2)} (\frac{R_{fo}}{R_{ao}})^p \tag{E5}$$
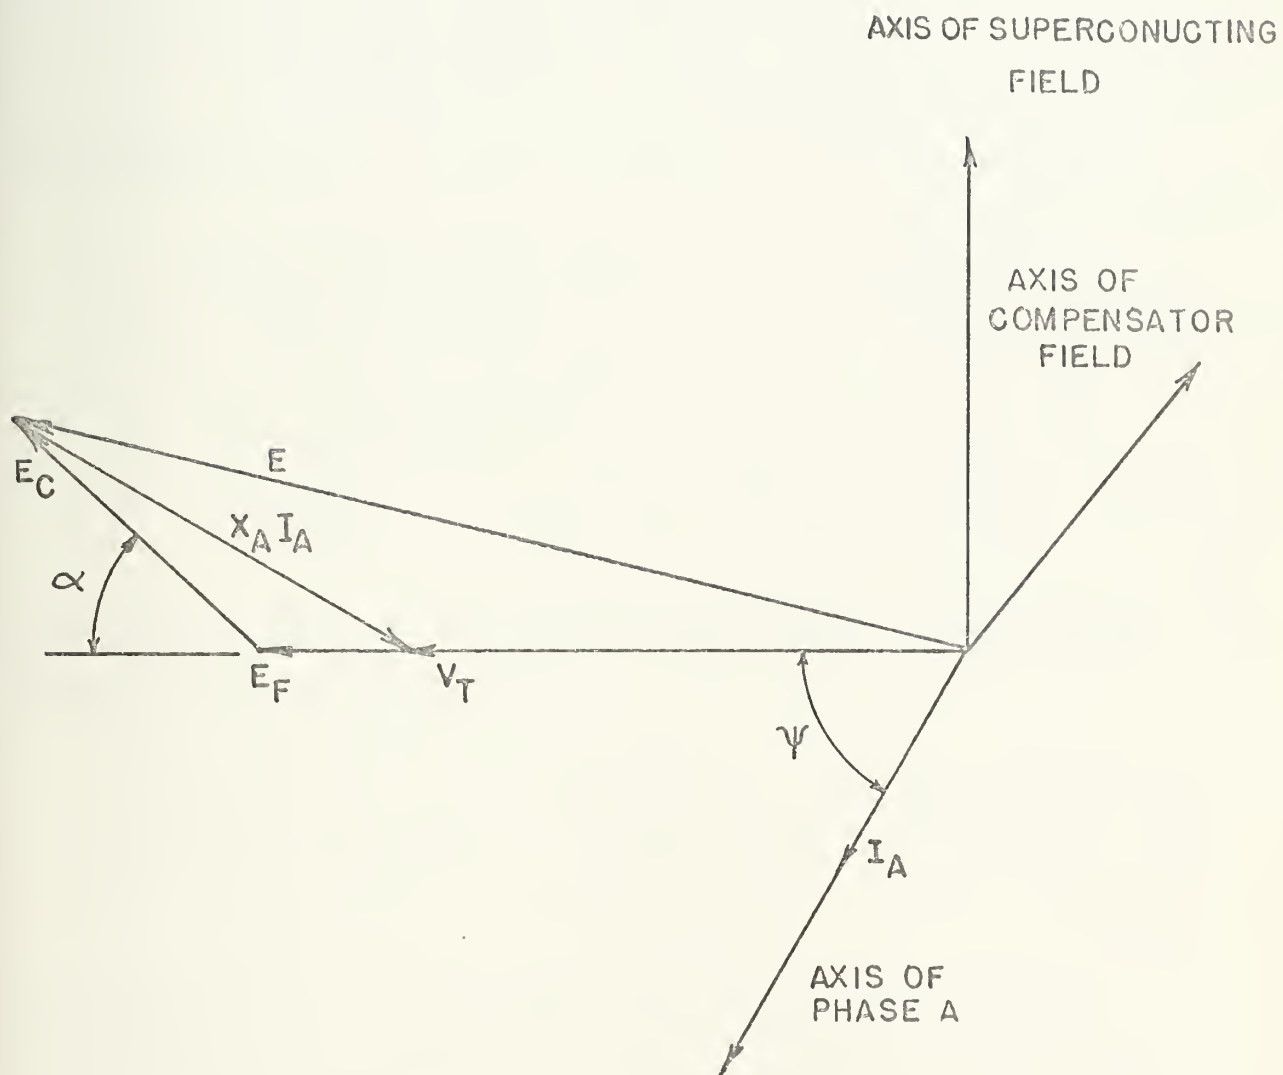
FIGURE EI. VOLTAGE-CURRENT RELATIONSHIP FOR
OVEREXCITED COMPENSATED MACHINE.

Using equation E5, equation E3 may be reduced to:

$$M_{1f} = MIFA\ N_{ta}N_{tf} \tag{E6}$$

The volt-ampere rating of the machine may be expressed as

$$P = 3V_T\ I_A = 3E_F\ I_A\left(\frac{V_T}{E_F}\right) \tag{E7}$$

From Appendix A,

$$I_A = \frac{J_a\theta_{wa}\ R_{ao}^{\ 2}(1-x^2)}{2N_{ta}} \tag{A49 modified}$$

$$I_f = \frac{J_f\theta_{wf}\ R_{fo}^{\ 2}(1-y^2)}{2N_{tf}} \tag{A49}$$

Substituting equations E2, E3, and A49 into E7, the machine rating may be expressed as:

$$P = \frac{24}{\sqrt{2}\ \pi}\ \omega_e\mu_o J_a J_f \ell_m (1-y^{2+p})R_{fo}^{\ 4}C_{1pf}\sin\left(\frac{p\theta_{wa}}{2}\right)\sin\left(\frac{p\theta_{wf}}{2}\right)\left(\frac{V_T}{E_F}\right) \tag{E8}$$

In order to solve for machine power from equation E8, an expression for (V_T/E_F) must be found. Define V_B and I_B as rated machine base voltage and current ($V_B=V_T$, $I_B=I_A$). Also, define the per-unit variables

134

$$v_t = \frac{V_T}{V_B}; \quad i_a = \frac{I_A}{I_B}; \quad e_f = \frac{E_F}{V_B} \qquad (E9)$$

Dividing equation E1 by V_B and the substitution of equations E9 yields:

$$e_f = v_t + \frac{X_A I_B}{V_B} i_a (\sin \psi - \cos \psi \cot \alpha) \qquad (E10)$$

With the per-unit synchronous reactance defined as

$$x_d = \frac{X_A I_B}{V_B}$$

Equation E10 becomes:

$$e_f = v_t + x_d i_a (\sin \psi - \cos \psi \cot \alpha) \qquad (E11)$$

If equation E11 is divided by e_f and simplified, the following relationship is produced:

$$\frac{v_t}{e_f} = 1 - x_a i_a (\sin \psi - \cos \psi \cot \alpha) \qquad (E12)$$

Where x_a, the internally normalized per-unit synchronous reactance is defined as:

$$x_a = \frac{X_A I_B}{E_F} = \frac{X_A I_A}{E_F} \qquad (E13)$$

135

Converting equation E12 from per-unit to absolute values yields:

$$\frac{V_T}{E_F} = 1 - x_a (\sin \psi - \cos \psi \cot \alpha) \qquad (E14)$$

Equation E13 may be expressed as:

$$x_a = \frac{\omega_e (L_a - L_{ab}) I_A}{E_F} \qquad (E15)$$

Using equation B25 for $(L_a - L_{ab})$ and equations E2 and E3, equation E15 becomes:

$$x_a = \frac{3\sqrt{2}}{4} \frac{\ell_a}{\ell_m} \frac{J_a}{J_f} \frac{\sin(\frac{p\theta_{wa}}{2})}{\sin(\frac{p\theta_{wf}}{2})} (\frac{R_{ao}}{R_{fo}})^{2p} \frac{1}{(1-y^{2p})} \frac{C_{sp}}{C_{lpf}} \qquad (E16)$$

All terms in equation E8 are now defined in terms of machine currents and geometry. Utlizing expressions developed in this and other appendices, it is possible to determine the compensator current density required for a given machine configuration and power level for any given value of α.

Using equation C38, torque on the armature may be expressed as:

$$T_a = \frac{24\mu_o J_a}{n^2 \pi} (\frac{1}{\alpha_o R_{si}}^{2k}) (\frac{R_{ao}^{2+k} - R_{ai}^{2+k}}{2+k}) \sin(\frac{k\theta_{wa}}{2})$$

$$[J_f \Omega_f \sin(\frac{k\theta_{wf}}{2}) \sin(k\phi) + J_c \Omega_c \sin(\frac{k\theta_{wc}}{2}) \sin k(\phi-\alpha)] \qquad (C38)$$

136

where Ω_c and Ω_f are defined by equation A56.

As a matter of convenience groups of terms in equation C38 may be defined as:

$$\Delta_1 \equiv \frac{24\mu_o J_a}{n^2\pi} \left(\frac{1}{\alpha_o R_{si}^{2k}}\right) \left(\frac{R_{ao}^{2+k} - R_{ai}^{2+k}}{2+k}\right) \sin\left(\frac{k\theta_{wa}}{2}\right) \qquad (E17)$$

$$\Delta_2 \equiv J_f \Omega_f \sin\left(\frac{k\theta_{wf}}{2}\right) \qquad (E18)$$

$$\Delta_3 \equiv \ell_c \sin\left(\frac{k\theta_{wc}}{2}\right) \qquad (E19)$$

Equation C38 may now be written as:

$$T_a = \Delta_1 [\Delta_2 \sin k\phi + \Delta_3 J_c \sin k(\phi-\alpha)] \qquad (E20)$$

Torque on the armature may also be expressed as

$$T_a = \frac{p(PWR)}{2\pi F}$$

where $\qquad\qquad\qquad\qquad\qquad\qquad\qquad\qquad\qquad$ (E21)

$$PWR = P \cos\psi$$

Substituting equation E21 into E20 and simplifying, a set of quadradic equations in terms of sin $(k\phi)$ results:

$$Q_A \sin^2(k\phi) + Q_B \sin(k\phi) + Q_C = 0 \qquad (E22)$$

137

Where,

$$Q_A \equiv \Delta_1^2 [J_c^2 \Delta_3^2 + \Delta_2^2 + 2\Delta_2 \Delta_3 J_c \cos(k\alpha)] \tag{E23}$$

$$Q_B \equiv -\frac{p(PWR)\Delta}{\pi F} [J_c \Delta_3 \cos(k\alpha) + \Delta_2] \tag{E24}$$

$$Q_C \equiv \frac{p^2(PWR)^2}{4\pi^2 F^2} - J_c^2 \Delta_1^2 \Delta_3^2 \sin^2(k\alpha) \tag{E25}$$

Using the equation for zero torque on the superconducting field winding (C38 or C33) written as

$$\cos(k\phi) = J_c \overline{\Lambda} \cos(k\alpha) \tag{E26}$$

Equation E22 reduces to:

$$A_5 J_c^4 + A_4 J_c^3 + A_3 J_c^2 + A_2 J_c + A_1 = 0 \tag{E27}$$

where,

$$\overline{\Lambda} = \begin{cases} \Lambda_1 & R_{ci} < R_{fi} \text{ (equations C29 or C30)} \\ \\ \Lambda_2 & R_{ci} < R_{fi} \text{ (equations C34 or C35)} \end{cases} \tag{E28}$$

$$A_5 \equiv \Delta_1^2 \Delta_3^2 \overline{\Lambda}^2 \sin^2(k\alpha) \tag{E29}$$

$$A_4 \equiv 2\overline{\Lambda}^2 \Delta_1^2 \Delta_2 \Delta_3 \sin^2(k\alpha)\cos(k\alpha) \tag{E30}$$

$$A_3 \equiv \overline{\Lambda}^2 \Delta_1^2 \Delta_2^2 \sin^2(k\alpha) - \frac{p(PWR)\Delta_1 \Delta_3 \overline{\Lambda} \cos(k\alpha)\sin(k\alpha)}{\pi F}$$

$$- \Delta_1^2 \Delta_3^2 \sin^2(k\alpha) \tag{E31}$$

138

$$A_2 \equiv - \frac{\Delta_1 \Delta_2 \, \overline{\Lambda} \, p(\text{PWR}) \, \sin(k\alpha)}{\pi F} \tag{E32}$$

$$A_1 \equiv \frac{p^2(\text{PWR})^2}{4\pi^2 F^2} \tag{E33}$$

For a four pole machine with angle α fixed at 45° (90° electrically) with an iron shield boundary (assume $\mu_s = .009$ hy/m), a first harmonic analysis of equations E29 through E33 yields:

$$
\left.
\begin{aligned}
A_5 &= \Delta_1{}^2 \Delta_3{}^2 \, \overline{\Lambda}^2 \\[2ex]
A_4 &= 0 \\[2ex]
A_3 &= \overline{\Lambda}^2 \Delta_1{}^2 \Delta_2{}^2 - \Delta_1{}^2 \Delta_3{}^2 \\[2ex]
A_2 &= -2\Delta_1 \Delta_2 \, \overline{\Lambda} \, (\text{PWR}) \\[2ex]
A_1 &= \frac{(\text{PWR})^2}{\pi^2 F^2}
\end{aligned}
\right\} \tag{E34}
$$

Equation E26 implies a <u>set</u> of conditions for zero torque on the superconducting field; one condition for each odd integer value of k. Higher order effects of the third and higher harmonics are not addressed herein.

Consider equation E8 wirtten as

$$P = K_1 J_a J_f \left(\frac{V_T}{E_F}\right) \tag{E35}$$

139

where,

$$K_1 = \frac{24}{\pi\sqrt{2}} \omega_e \mu_o \ell_m (1-y^{2+P}) R_{fo}^{\;4} C_{lpf} \sin(\frac{p\theta_{wf}}{2}) \sin(\frac{p\theta_{wa}}{2}) \qquad \text{(E36)}$$

also, consider equation E16 written as

$$x_a = K_2 \frac{J_a}{J_f} \qquad \text{(E37)}$$

where,

$$K_2 = \frac{3\sqrt{2}}{4} \frac{\ell_a}{\ell_m} \frac{\sin(\frac{p\theta_{wa}}{2})}{\sin(\frac{p\theta_{wf}}{2})} (\frac{R_{ao}}{R_{fo}})^{2p} \frac{1}{(1-y^{2P})} \frac{C_{sp}}{C_{lpf}} \qquad \text{(E38)}$$

Substituting equation E14 and E37 into E35 yields:

$$P = K_1 J_a J_f [1-K_2 \frac{J_a}{J_f}(\sin \psi - \cos \psi \cot \alpha)] \qquad \text{(E39)}$$

Equation E39 may be reduced to:

$$P = K_3 J_a - K_4 J_a^{\;2}(\sin \psi - \cos \psi \cot \alpha) \qquad \text{(E40)}$$

where

$$\left.\begin{array}{l} K_3 \equiv K_1 J_f \\[1.5em] K_4 \equiv K_1 K_2 \end{array}\right\} \qquad \text{(E41)}$$

Using equations E7 and E40, an expression for J_a in terms of J_f, ψ and α may be found:

$$J_f = K_5 + K_4 J_a (\sin \psi - \cos \psi \cot \alpha) \qquad (E42)$$

where,

$$K_5 \equiv \frac{3V_T \theta_{wa} R_{ao}{}^2 (1-x^2)}{K_1 N_{ta}} \qquad (E43)$$

If λ is defined as $\sin \psi - \cos \psi \cot \alpha$, equation E42 may be written as:

$$J_a = (\frac{1}{K_4 \lambda}) J_f - \frac{K_5}{K_4 \lambda} \quad \left. \right\} \quad K_4, K_5 > 0 \qquad (E44)$$

An examination of Figures 7, 8, and 9 reveals that the angle ϕ between the armature phase a field and the superconducting main field is equivalent to the angle ($\psi + 90°$) electrically at the zero torque condition. Therefore, equation E26 may be written as

$$\cos k \, (\psi + 90°) = J_c \, \overline{\Lambda} \, \cos(k\alpha) \qquad (E45)$$

which reduces to

$$\cos(k\psi) = J_c \, \overline{\Lambda} \, \cos(k\alpha) \qquad (E46)$$

141

Angle ψ in equation E46 is a mechanical angular value analogous to angle ϕ in Figure 1. Employing the analytical techniques which earlier resulted in equations E29 through E34, it is also possible to obtain a fourth order equation in $\cos k\alpha$ or $\sin k\alpha$ as

$$B_5 \cos^4(k\alpha) + B_4 \cos^3(k\alpha) + B_3 \cos^2(k\alpha) + B_2 \cos(k\alpha) + B_1 = 0$$

$$\text{(E47)}$$

where B_1 through B_5 are functions of machine geometry, J_a, ψ, and J_c.

Machine Length Parameters

Based on machine lengths developed in reference 6, Table E1 represents the parameters used in this paper.

142

Armature end turn length $\qquad$ $\Delta \ell = R_{ai} + R_{ao}$

Armature self-inductance
effective length $\qquad$ $\ell_a = \ell + \Delta \ell$

Field-to-armature mutual
inductance effective length $\qquad$ $\ell_m = \ell$

Compensator-to-armature
mutual inductance effective
length $\qquad$ $\ell_c = \ell$

Eddy current loss effective
length $\qquad$ $\ell_{ed} = \ell$

Conduction loss effective
length $\qquad$ $\ell_c = \ell + 2\Delta \ell$

TABLE E1   Effective Lengths

APPENDIX F

PROGRAM LISTING

The program used in the development of this thesis, THESIS I, accepts input data and provides output data as described in Table F1. The program as listed herein provides output data for any given number of machine geometries and for each machine geometry provides data for armature current densities ranging from .25 x 10^6 to 2.5 x 10^6 a/m². Any input parameter may be incremented as required by inserting a proper ∞ loop. The program accepts any number of pole pairs, any harmonic desired, and any value for shield permeability. Table F2 describes the arrangement of the input deck.

DATA CLASS	ALGEBRAIC SYMBOL	FORTRAN WORD
Input	p	P
	n	N
	θ_{wa}	TWA
	θ_{wc}	TWC
	θ_{wf}	TWF
	α	ALP
	f	F
	J_a	JA
	J_f	JF
	I_a	IA
	μ_s	MUS
	$\cos \psi$	PF
	R_{ai}	RAI
	R_{ao}	RAO
	R_{fi}	RFI
	R_{fo}	RFO
	R_{ci}	RCI
	R_{co}	RCO
	R_{si}	RSI
	R_{so}	RSO
	ℓ	L
Output	all input quantities	as above
	C_2	C2
	C_{2f}	C2F
	x_a	XA

DATA CLASS	ALGEBRAIC SYMBOL +	FORTRAN WORD
	x_d	XD
	E_f	EF
	N_{ta}	NTA
	V_t	VT
	PWR	APWR
	T_a	TA
	Λ	F4
	Δ_1, Δ_2, Δ_3	DELT1, DELT2, DELT3
	J_c	JC

TABLE F1.   Input/Output Data for THESIS I Program

DATA CARD #	COLUMNS	CONTAINS	FORMAT
1	1-10	p	F10.3
	11-20	N	F10.3
	21-30	θ_{wa}	F10.3
	31-40	θ_{wc}	F10.3
	41-50	θ_{wf}	F10.3
	51-60	α	F10.3
	61-70	F	F10.3
2	1-10	J_a	E10.3
	11-20	J_f	E10.3
3	1-10	I_A	F10.3
4	1-10	μ_s	F10.3
5	1-10	PF	F10.3
6	1-5	IMUS	I5
	6-10	KY	I5
7	1-10	R_{ai}	F10.3
	11-20	R_{ao}	F10.3
	21-30	R_{fi}	F10.3
	31-40	R_{fo}	F10.3
	41-50	R_{ci}	F10.3
	51-60	R_{ω}	F10.3
	61-70	R_{si}	F10.3
	71-80	R_{so}	F10.3

DATA CARD #	COLUMNS	CONTAINS	FORMAT
8	1-10	L	F10.3

TABLE F2. Arrangement of Input Data Deck

Data cards 7 and 8 are sequentially repeated (without cards 1-6) depending upon the number of machines desired. KY is the number of machines being analyzed on each run. KY may, of course, be set artifically high and the program terminates once all data is processed. By setting IMUS = ϕ on card 6, α_0 is set equal to -1, assuming a laminated iron shield of high permeability; otherwise, IMUS = any interger not ϕ allows α_0 to be computed.

```
C      THESIS I                                                          THESO001
C      LT. D. M. REYNERSON, USN   SPRING 1975                            THESO002
C      A SUPERCONDUCTING SYNCHRONOUS TORQUE-COMPENSATED MOTOR FOR NAVAL APPLICATIONS  THESO003
C      INPUT P,N,TWA,TWC,TWF,ALP,F,WA,WC,JF,IA,MUS,RE,IMUS,KY,CAE,RSI,REO,PCI,PC  THESO004
C      C,RSI,RSO,L                                                       THESO005
C      OUTPUT ALL INPUTS AND FTM,C2,C2F,XA,XR,EF,V,NEA,PWRR,PWPI,APUR,PA,DELT1,DELT  THESO006
C      2,EFT3,P4,JC (4 ROOTS)                                            THESO007
C      PROGRAM ALLOWS FOR END TURN EFFECTS                               THESO008
C      INPUT UNITS BELOW IN PAREN                                        THESO009
C      P=PAIRS OF POLES                                                  THESO010
C      N=HARMONIC INDEX                                                  THESO011
C      TWA=ARMATURE INCLUDED ANGLE (DEGREES)                             THESO012
C      TWC=COMPENSATOR INCLUDED ANGLE (DEGREES)                          THESO013
C      TWF=MAIN FIELD INCLUDED ANGLE (DEGREES)                           THESO014
C      RAI=INNER RADIUS OF ARMATURE (INCHES)                             THESO015
C      RAO= OUTER RADIUS OF ARMATURE (INCHES)                            THESO016
C      RCI=INNER RADIUS OF COMPENSATOR (INCHES)                          THESO017
C      RCO=OUTER RADIUS OF COMPENSATOR (INCHES)                          THESO018
C      RFI=INNER RADIUS OF FIELD (INCHES)                                THESO019
C      RFO= OUTER RADIUS OF FIELD (INCHES)                               THESO020
C      RSI= INNER RADIUS OF SHIELD (INCHES)                              THESO021
C      RSO= OUTER RADIUS OF SHIELD (INCHES)                              THESO022
C      L=MACHINE LENGTH (INCHES)                                         THESO023
C      F= FREQUENCY (HZ)                                                 THESO024
C      JA= ARMATURE CURRENT DENSITY (A/SQ. METER)                        THESO025
C      JC= COMPENSATOR CURRENT DENSITY (A/SQ. METER)                     THESO026
C      JF= FIELD CURRENT DENSITY (A/SQ. METER)                           THESO027
C      NTA= # TURNS PER ARMATURE POLE PAIR                               THESO028
C      NFC= # TURNS PER COMPENSATOR POLE PAIR                            THESO029
C      NFF= # TURNS PER FIELD POLE PAIR                                  THESO030
C      IA=ARMATURE CURRENT (AMPS RMS)                                    THESO031
C      MUS=SHIELD PERMEABILITY (HY/METER)                                THESO032
C      RE=POWER FACTOR                                                   THESO033
C      IMUS=FLAG: IF IMUS INPUT AS 0, ASSUME SHIELD PERMEABILITY LARGE,ALPO=-1; IF  THESO034
C      IMUS INPUT ANY INTEGER OTHER THAN 0, ALPO COMPUTED.               THESO035
C      ALPO= REFLECTION COEFF AT RST                                     THESO036
```

THES0037
THES0038
THES0039
THES0040
THES0041
THES0042
THES0043
THES0044
THES0045
THES0046
THES0047
THES0048
THES0049
THES0050
THES0051
THES0052
THES0053
THES0054
THES0055
THES0056
THES0057
THES0058
THES0059
THES0060
THES0061
THES0062
THES0063
THES0064
THES0065
THES0066
THES0067
THES0068
THES0069
THES0070
THES0071
THES0072

```
C     KV=# OF MACHINES INPUTED
C     RPM=REV PER MINUTE OF PROPELLER SHAFT
C     C2=ANALYTICAL CONSTANT
C     C2F=AVALYTICAL CONSTANT
C     XA=INTERNALLY NORMALIZED SYNCHRONOUS REACTANCE
C     XD=PER-UNIT SYNCHRONOUS REACTANCE
C     FF=INTERNAL PER PHASE VOLTAGE(VOLTS RMS)
C     PWRR=REAL MACHINE POWER IN KW
C     PWRI=IMAGINARY POWER IN KVARES
C     ADY=MACHINE POWER IN HORSEPOWER
C     RA=MACHINE OUTPUT TORQUE(FT-LBS)
C     VT=EXTERNAL VOLTAGE PER PHASE(VOLTS RMS)
C     P4,DELT1,DELT2,DELT3=CONSTANTS OF CONVENIENCE
      COMPLEX*16 A(5),ROOT(4)
      DOUBLE PRECISION R(5),C(5)
      REAL L,LA,LM,LF,LC,IA,JA,JE,JC,JF,MUS,N,MUO,NTA,MIPA,K,K2
      Y=0
      IPRIV=1
      READ(5,100)P,N,TWA,TWC,TWF,ALP,F
      READ(5,200)JA,JF
      READ(5,300)TA
      WRITE(6,400)P,N,TWA,TWF,TWC,ALP,F
      READ(5,500)MUS
      READ(5,600)PF
      PI=3.14159
      READ(5,700)FXUS,KV
      K=N*P
      K2=2.*K
      AK2=K+2.
      A2K=K-2.
      P2=P**2.
      AP2=P+2.
      A2P=P-2.
      MUO=4.*PI*(1.E-07)
      DO 12 KX=1,KV
      READ(5,800)RAT,RAO,REI,FFO,RCI,RCO,RSI,RSO
```

```
      READ(5,900) L
      WRITE(6,1000) RAI,RAO,RSI,RSO,RCI,RCO,PSI,PSO
      WRITE(6,1100) PF,L
      DELTL=RAT+RAO
      LA=L+DELTL
      TM=L
      LC=L
      LF=L
      CF=.025
      RT=CF*PF
      RFC=PFC*CF
      PCI=PCI*CF
      RCO=RCO*CF
      RAI=RAI*CF
      RAO=RAO*CF
      RSI=RSI*CF
      RSO=RSO*CF
      L=L*CF
      LA=LA*CF
      LF=LF*CF
      LV=LV*CF
      LC=LC*CF
      W=PST/PSO
      X=RAI/RAC
      Y=RST/PSO
      Z=PCI/RCO
      TWA=PI*TWA/180.
      TWC=PI*TWC/180.
      TWE=PI*TWE/180.
      ALP=PT*ALP/180.
      STC=SIN(K*TWC/2.)
      STA=SIN(K*TWA/2.)
      STE=SIN(K*TWE/2.)
      SKA=SIN(K*ALP)
      CKA=COS(K*ALP)
      TERM=60.*P/D
```

THESO073
THESO074
THESO075
THESO076
THESO077
THESO078
THESO079
THESO080
THESO081
THESO082
THESO083
THESO084
THESO085
THESO086
THESO087
THESO088
THESO089
THESO090
THESO091
THESO092
THESO093
THESO094
THESO095
THESO096
THESO097
THESO098
THESO099
THESO100
THESO101
THESO102
THESO103
THESO104
THESO105
THESO106
THESO107
THESO108

```
      WRITE(6,1200)JA,JF,PPW
      DO 11 KV=1,10
      IF(IMUS.EQ.0)GO TO 1
      F1=(MUO/MUS)*(1.+W**K2)
      F2=(1.-W**K2)+F1
      F3=(1.+W**K2)+F1
      ALPO=(1.+(MUS/MUO)*(F2/F3))/(1.-(MUS/MUO)*(F2/F3))
      GO TO 2
    1 ALPO=1.
    2 IF(RCI.GE.RFO)GO TO 3
      F4=(.6667*STC*(RCO**AK2-RCI**AK2)/(JA*STA*(RAO**AK2-RAI**AK2)
     1)*(RSI**K2)+STC*(RFO**AK2-RCI**AK2-ALPO*(AK2/A2K)*(RFO
     1**AK2-RFI**AK2-ALPO*(AK2/A2K)*(RSI**K2)*(RFO**A2K-RFI**A2K)))
      GO TO 5
    3 IF(K.EQ.2.)GO TO 4
      F4=(.6667*STC*(RFO**AK2-RFI**AK2)*(RCO**AK2-RCI**AK2-ALPO*(AK2/A2K
     1)*(RSI**K2)*(RCO**A2K-RCI**A2K)))/(JA*STA*(RAO**AK2-RAI**AK2)*(RFO
     1**AK2-RFI**AK2-ALPO*(AK2/A2K)*(RSI**K2)*(RFO**A2K-RFI**A2K)))
      GO TO 5
    4 F4=(.6667*STC*(RFO**4-RFI**4)*(RCO**4-RCI**4-4.*ALPO*(RSI**4)*ALOG
     1(1./Y)))/(JA*STA*(RAO**4-RAI**4)*(RFO**4-RFI**4-4.*ALPO*ALOG(1./Y)
     1))
    5 IF(K.EQ.2.)GO TO 6
      CMC=(RCO**AK2-RCI**AK2)/AK2-(ALPO*(RSI**K2)*(RCO**A2K-RCI**A2K))/A
   12K
      CMC=(RCO**AK2-RCI**AK2)/AK2-(ALPO*(RSI**K2)*(RCO**A2K-RCI**A2K))/A
   12K
      GO TO 7
    6 CMF=(RFO**4-RFI**4)/4.-ALPO*(RSI**4)*ALOG(1./Y)
      CMC=(RCO**4-RCI**4)/4.-ALPO*(RSI**4)*ALOG(1./Z)
    7 WRITE(6,1300)F1
      NFA=(JA*TWA*(1.-X*Y)*RAC*RAO)/(2.*IA)
      IF(K.EQ.2.)GO TO 8
      C2F=(1.-(Y**A2P)-(A2P/AK2)*ALPO*(1.-XAP2)*((RAO/RSI)**P2))/(P*(4.-
     1P*P)
      C2=(2.-K-4.*(X**AK2)+AK2*(Y**4)-((A2K/AK2)*(1.-X**AK2)*((RAO/RSI)*
     1*K2)))/(K*(4.-K*K))
      GO TO 9
```

```
      C2F=-.125*ALOG(X)+((1.-X**4)*RAO**4)/(32.*PSI*4)                    THESO145
      C2=.5*(X**4)*ALOG(X)+(1.-X**4)/8.+((1.-X**4)*(RAO**4))/(16.*RSI**4  THESO146
     1)                                                                   THESO147
      WRITE(6,1400)C2,C2F                                                 THESO148
      VTFA=(32.*LM*MTO*C2F*STA*STF*(1.-Y**AK2)*((FFO/FAO)**F))/(PI*TWA*T  THESO149
     1MF*(1.-Y**Y)*(1.-X*Y)*ALPO)                                         THESO150
      YA=(1.067*LA*TA*STA*C2*((RAO/FFO)**AF2))/(LM*JF*STF*(1.-Y**AF2)*C2  THESO151
     1F)                                                                  THESO152
      WRITE(6,1500)YA                                                     THESO153
      FFA=APCO(FF)                                                        THESO154
      SINF=SIN(FFA)                                                       THESO155
      VTFF=1.-X)*(SINF-FF*(CKA/SKA))                                      THESO156
      XD=XA*VTFF                                                          THESO157
      WRITE(6,1500)YD                                                     THESO158
      FF1=.707*FF*FFA*JF*FFF*(1.-Y**Y)*RFO*RFO*F                          THESO159
      FF=FF1*NFA                                                          THESO160
      VTF=Y*FF*FF                                                         THESO161
      WRITE(6,1700)FF,NFA,VF                                              THESO162
      PWS=33.94*F*MFO*JA*JF*LM*(1.-Y**AF2)*(FFO**AF2)*C2F*VTFF*STA*STF*P  THESO163
     1F/(RAO**A2F)                                                        THESO164
      PWFF=PWF/100.                                                       THESO165
      FSFI=FWFF*SINF/FF                                                   THESO166
      WRITE(6,1800)                                                       THESO167
      WFTF(6,1900)PWFF,FWFI                                               THESO168
      APWF=PWF*.00134                                                     THESO169
      TA=(P*APWF*550.)/(2.*PI*F)                                          THESO170
      WRITE(6,2000)APWF,TA                                                THESO171
      DFLT1=(24.*LA*MFO*JA*STA*(RAO**AK2-FAT**AK2)/(N*N*PI*AK2*AL2O*(FSI  THESO172
     1**K2))                                                              THESO173
      DELT2=JF*C1F*STF                                                    THESO174
      DELFF=OMC*STC                                                       THESO175
      WRITE(6,2100)DELF1,DELT2,DELT3,F4                                   THESO176
      F(1)=(P*F*PWF*DWF)/(4.*EI*DI*F*F)                                   THESO177
      F(2)=-(DELF1*DELF2*F4*F*PWF*SKA)/(PI*F2)                            THESO178
      B(3)=F4*E*DELF1*DELF1*DELT2*DELT2*SKA*SKA-(P*PWF*DELF1*DFLF3*F4*C   THESO179
     1K1*SK1)/(FF*F)-DELF1*DELF1*DELT3*DELT3*SKA*SKA                      THESO180
```

```
      B(4)=2.*F4*F4*DELT1*DELT1*DELT2*DELT2*SKA*CKA*SKA                    THESO181
      B(5)=DELT1*DELT1*DELT3*DELT3*SKA*SKA*SKA*F4*F4                       THESO182
      C(1)=0.D0                                                           THESO183
      C(2)=0.D0                                                           THESO184
      C(3)=0.D0                                                           THESO185
      C(4)=0.D0                                                           THESO186
      C(5)=0.D0                                                           THESO187
      DO 10 I=1,5                                                         THESO188
      A(I)=DCMPLX(B(I),C(I))                                              THESO189
   10 CONTINUE                                                            THESO190
      CALL ROOT(A,M,IPRIN,ROOT)                                           THESO191
      JA=JA+.25E+06                                                       THESO192
   11 CONTINUE                                                            THESO193
   12 CONTINUE                                                            THESO194
  100 FORMAT(7E10.3)                                                      THESO195
  200 FORMAT(2E10.3)                                                      THESO196
  300 FORMAT(E10.3)                                                       THESO197
  400 FORMAT(/5X,'R=',1X,F5.2,3X,'N=',1X,F5.2,3X,'TWA=',1X,F8.2,3X,'TWF=  THESO198
     1',1X,F8.2,3X,'EWC=',1X,F8.2,3X,'ALPHA=',1X,F8.2,'FREQ=',1X,F8.2)    THESO199
  500 FORMAT(E10.3)                                                       THESO200
  600 FORMAT(E10.3)                                                       THESO201
  700 FORMAT(2E15.5)                                                      THESO202
  800 FORMAT(8E10.3)                                                      THESO203
  900 FORMAT(E10.3)                                                       THESO204
 1000 FORMAT(//5X,'RAT=',1X,F7.2,3X,'RAO=',1X,F7.2,3X,'RCI=',1X,F7.2,3X,  THESO205
     1'RCO=',1X,F7.2,3X,'RFI=',1X,F7.2,3X,'RFO=',1X,F7.2,3X,'RST=',1X,F7  THESO206
     1.2,3X,'FSO=',1X,F7.2)                                               THESO207
 1100 FORMAT(/5X,'POWER FACTOR=',1X,F7.5,5X,'L=',1X,F7.2)                 THESO208
 1200 FORMAT(//5X,'JA=',1X,E10.4,3X,'JE=',1X,E10.4,3X,'RPM=',1X,F10.3)    THESO209
 1300 FORMAT(/5X,'C1=',1X,E10.3)                                          THESO210
 1400 FORMAT(/5X,'C2=',1X,F12.5,3X,'C2F=',1X,F12.5)                       THESO211
 1500 FORMAT(/5X,'XA=',1X,F12.5)                                          THESO212
 1600 FORMAT(/5X,'PER UNIT SYNC. REACTANCE=',1X,F10.7)                    THESO213
 1700 FORMAT(/5X,'FE=',1X,F10.3,3X,'NTA=',1X,F12.5,3X,'VT=',1X,F12.5)     THESO214
 1800 FORMAT(/5X,'REAL POWER IN KW;   REACTIVE POWER IN KVARS')           THESO215
 1900 FORMAT(/5X,'REAL POWER=',1X,F12.5,3X,'REACTIVE POWER=',1X,F12.5)    THESO216
```

154

```
2000  FORMAT (/5X,'POWER(HP)=',1X,F12.5,3X,'TORQUE(FT-LBS)=',1X,F12.5)
2100  FORMAT(/5X,'DELT1=',1X,F12.5,3X,'DELT2=',1X,F12.5,3X,'DELT3=',1X,F
      END
```

REFERENCES

1. Hildebrand, Francis B., *Advanced Calculus for Applications*, Prentice-Hall, Inc., Englewood Cliffs, N.J., May 1965.

2. Steeves, Michael, "A Generalized Two-Dimensional Field Analysis of Air-Core Synchronous Machines", Internal Memorandum #19, Electric Power Systems Engineering Laboratory, M.I.T., Cambridge, Massachusetts, June 1973.

3. Kirtley, James L., "Surface Coefficient for Multipolar Magnetic Field Boundary Condition Problems", presented to IEEE Winter Power Meeting, New York, January 27 - February 1, 1974, to be published in *Transactions Power Apparatus and Systems*, paper #T 74 220-0.

4. Stekly, Z.J.J. and Halas, E., "A Study of Alternators With Superconducting Field Windings: I - Analysis", *IEEE Transactions Power Apparatus and Systems*, Vol. PAS-85, No. 3, March, 1966.

5. Kirtley, James L., "Basic Formulas for Air-Core Synchronous Machines", IEEE Conference Paper #71 CP 155-PWR.

6. Kirtley, James L., "Design and Construction of an Alternator with a Superconducting Field Winding", Ph.D. Thesis, Department of Electrical Engineering, M.I.T., August 1971.

7. Minervini, Joseph V., "Analysis and Design of Multipole, Superconducting Rotating Electric Machines", S.M.M.E. Thesis, Department of Mechanical Engineering, M.I.T., January 1974.

8. Crandall, Stephen H. and Norman C. Dahl, *An Introduction to the Mechanics of Solids*, McGraw-Hill, New York, 1959.

9. M.I.T. Electrical Engineering Department Staff, *Magnetic Circuits and Transformers*, M.I.T. Press, Cambridge, Massachusetts, January 1965.